



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.30 GHz, Intel Xeon Gold 6230N)

SPECrate®2017_int_base = 220

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Sep-2019

Hardware Availability: Jul-2019

Software Availability: May-2019

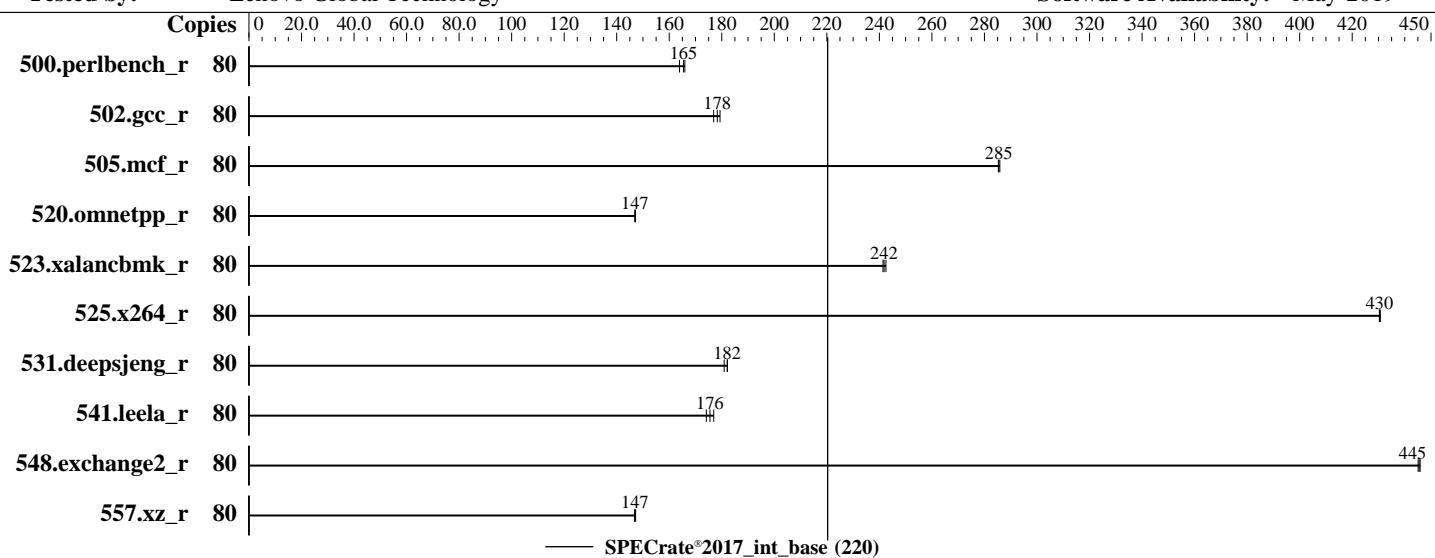

Hardware

CPU Name: Intel Xeon Gold 6230N
Max MHz: 3500
Nominal: 2300
Enabled: 40 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 27.5 MB I+D on chip per chip
Other: None
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)
Storage: 1 x 960 GB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 (x86_64)
Compiler: Kernel 4.12.14-25.13-default
C/C++: Version 19.0.4.227 of Intel
C/C++: Compiler for Linux;
Fortran: Version 19.0.4.227 of
Intel Fortran
Compiler for Linux
Parallel: No
Firmware: Lenovo BIOS Version IVE142E 2.30 released Aug-2019
tested as IVE141E 2.30 Jul-2019
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: --



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.30 GHz, Intel Xeon Gold 6230N)

SPECrate®2017_int_base = 220

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	80	777	164	767	166	770	165							
502.gcc_r	80	635	178	640	177	632	179							
505.mcf_r	80	453	285	452	286	453	285							
520.omnetpp_r	80	713	147	714	147	714	147							
523.xalancbmk_r	80	349	242	350	241	348	242							
525.x264_r	80	325	431	325	430	325	430							
531.deepsjeng_r	80	503	182	503	182	507	181							
541.leela_r	80	749	177	761	174	755	176							
548.exchange2_r	80	470	446	471	445	470	445							
557.xz_r	80	587	147	588	147	589	147							

SPECrate®2017_int_base = 220

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017-1.0.5-ic19.0u4/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.30 GHz, Intel Xeon Gold 6230N)

SPECrate®2017_int_base = 220

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Trusted Execution Technology set to Enable

SNC set to Enable

Stale AtoS set to Enable

Sysinfo program /home/cpu2017-1.0.5-ic19.0u4/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-4brr Fri Sep 6 01:24:50 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6230N CPU @ 2.30GHz
        2 "physical id"s (chips)
        80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 20
siblings   : 40
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               80
On-line CPU(s) list: 0-79
Thread(s) per core:  2
Core(s) per socket:  20
Socket(s):            2
NUMA node(s):         4
Vendor ID:            GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Gold 6230N CPU @ 2.30GHz
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.30 GHz, Intel Xeon Gold 6230N)

SPECrate®2017_int_base = 220

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Platform Notes (Continued)

```

Stepping: 6
CPU MHz: 2300.000
CPU max MHz: 3900.0000
CPU min MHz: 800.0000
BogoMIPS: 4600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 28160K
NUMA node0 CPU(s): 0-2,5,6,10-12,15,16,40-42,45,46,50-52,55,56
NUMA node1 CPU(s): 3,4,7-9,13,14,17-19,43,44,47-49,53,54,57-59
NUMA node2 CPU(s): 20-22,25,26,30-32,35,36,60-62,65,66,70-72,75,76
NUMA node3 CPU(s): 23,24,27-29,33,34,37-39,63,64,67-69,73,74,77-79
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpf perf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrandlahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqmq mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local dtherm ida arat pln
pts pku ospke avx512_vnni flush_l1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 28160 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 5 6 10 11 12 15 16 40 41 42 45 46 50 51 52 55 56
node 0 size: 96365 MB
node 0 free: 90221 MB
node 1 cpus: 3 4 7 8 9 13 14 17 18 19 43 44 47 48 49 53 54 57 58 59
node 1 size: 96724 MB
node 1 free: 96500 MB
node 2 cpus: 20 21 22 25 26 30 31 32 35 36 60 61 62 65 66 70 71 72 75 76
node 2 size: 96753 MB
node 2 free: 96320 MB
node 3 cpus: 23 24 27 28 29 33 34 37 38 39 63 64 67 68 69 73 74 77 78 79
node 3 size: 96751 MB
node 3 free: 96485 MB
node distances:
node    0    1    2    3
      0: 10 11 21 21

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.30 GHz, Intel Xeon Gold 6230N)

SPECrate®2017_int_base = 220

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Platform Notes (Continued)

```
1: 11 10 21 21
2: 21 21 10 11
3: 21 21 11 10
```

From /proc/meminfo

```
MemTotal:      395873400 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
  NAME="SLES"
  VERSION="15"
  VERSION_ID="15"
  PRETTY_NAME="SUSE Linux Enterprise Server 15"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15"
```

uname -a:

```
Linux linux-4brr 4.12.14-25.13-default #1 SMP Tue Aug 14 15:07:35 UTC 2018 (947aa51)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):           Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,
IBPB, IBRS_FW
```

run-level 3 Sep 6 01:23

SPEC is set to: /home/cpu2017-1.0.5-ic19.0u4

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb3	xfs	891G	76G	816G	9%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[IVE141E-2.30]- 07/02/2019

Memory:

24x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933

(End of data from sysinfo program)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.30 GHz, Intel Xeon Gold 6230N)

SPECrate®2017_int_base = 220

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Compiler Version Notes

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
| 525.x264_r(base) 557.xz_r(base)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
| 541.leela_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SN550
(2.30 GHz, Intel Xeon Gold 6230N)

SPECrate®2017_int_base = 220

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Sep-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Base Portability Flags (Continued)

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-D.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-D.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-09-05 13:24:50-0400.

Report generated on 2020-10-30 16:59:59 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.