



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
3.20 GHz, AMD EPYC 7262

SPECspeed®2017\_fp\_base = 87.6

SPECspeed®2017\_fp\_peak = 92.9

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2020

Hardware Availability: Jun-2020

Software Availability: Dec-2019

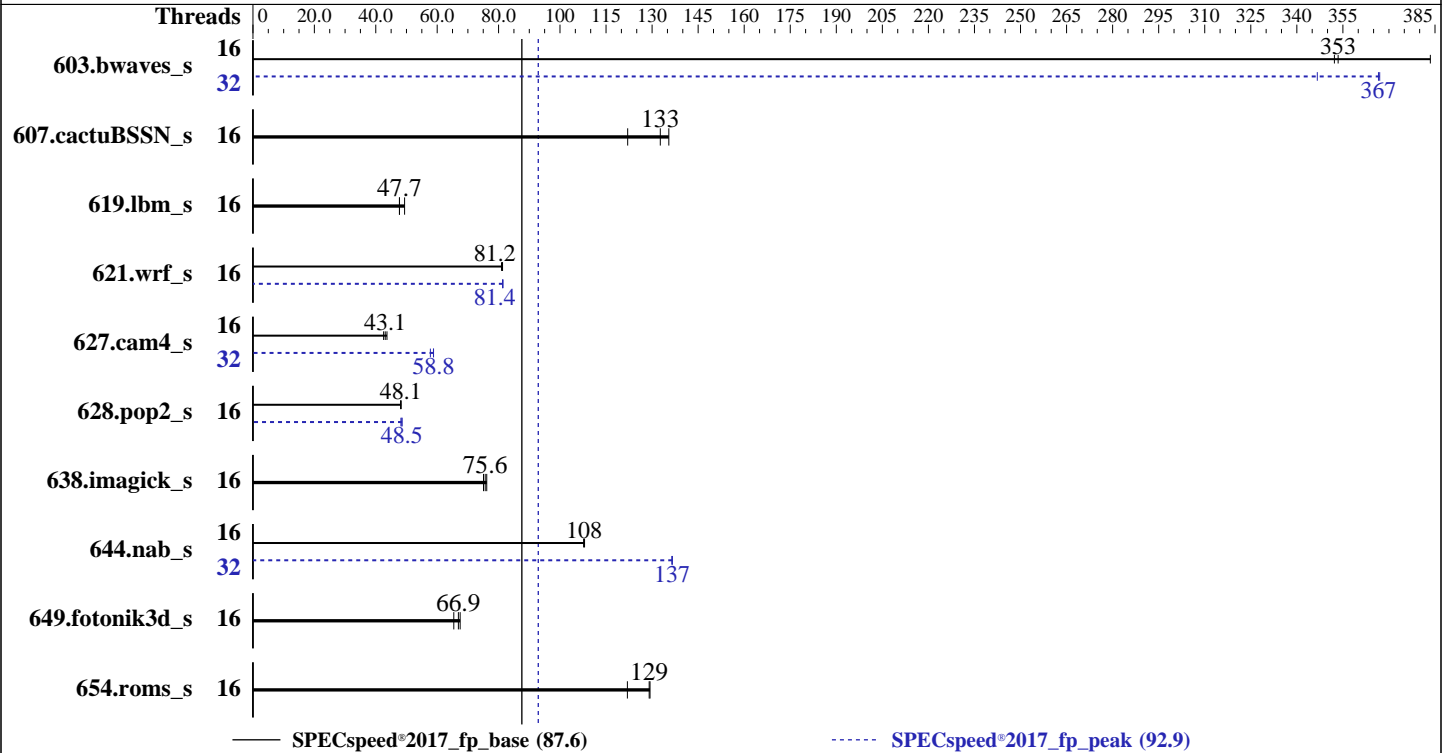

### Hardware

CPU Name: AMD EPYC 7262  
 Max MHz: 3400  
 Nominal: 3200  
 Enabled: 16 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 128 MB I+D on chip per chip, 16 MB per core  
 Other: None  
 Memory: 1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP5 (x86\_64)  
 Kernel 4.12.14-120-default  
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version D8E105P 1.00 released May-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
3.20 GHz, AMD EPYC 7262

SPECSpeed®2017\_fp\_base = 87.6

SPECSpeed®2017\_fp\_peak = 92.9

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: May-2020  
Hardware Availability: Jun-2020  
Software Availability: Dec-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	154	383	<b>167</b>	<b>353</b>	167	352	32	170	347	<b>161</b>	<b>367</b>	161	367
607.cactuBSSN_s	16	123	135	137	122	<b>126</b>	<b>133</b>	16	123	135	137	122	<b>126</b>	<b>133</b>
619.lbm_s	16	106	49.4	110	47.7	<b>110</b>	<b>47.7</b>	16	106	49.4	110	47.7	<b>110</b>	<b>47.7</b>
621.wrf_s	16	163	81.3	<b>163</b>	<b>81.2</b>	163	80.9	16	162	81.4	<b>163</b>	<b>81.4</b>	163	81.3
627.cam4_s	16	203	43.6	208	42.6	<b>206</b>	<b>43.1</b>	32	153	57.8	<b>151</b>	<b>58.8</b>	151	58.8
628.pop2_s	16	<b>247</b>	<b>48.1</b>	247	48.1	246	48.3	16	246	48.2	<b>245</b>	<b>48.5</b>	245	48.6
638.imagick_s	16	192	75.1	189	76.1	<b>191</b>	<b>75.6</b>	16	192	75.1	189	76.1	<b>191</b>	<b>75.6</b>
644.nab_s	16	<b>162</b>	<b>108</b>	162	108	162	108	32	128	137	<b>128</b>	<b>137</b>	128	136
649.fotonik3d_s	16	135	67.5	<b>136</b>	<b>66.9</b>	139	65.4	16	135	67.5	<b>136</b>	<b>66.9</b>	139	65.4
654.roms_s	16	122	129	<b>122</b>	<b>129</b>	129	122	16	122	129	<b>122</b>	<b>129</b>	129	122

SPECSpeed®2017\_fp\_base = **87.6**

SPECSpeed®2017\_fp\_peak = **92.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

```
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
3.20 GHz, AMD EPYC 7262

SPECspeed®2017\_fp\_base = 87.6

SPECspeed®2017\_fp\_peak = 92.9

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Dec-2019

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-31"  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-1.1.0-amd-rome-aocc200-C3/amd\_speed\_aocc200\_rome\_C\_lib/64  
:/home/cpu2017-1.1.0-amd-rome-aocc200-C3/amd\_speed\_aocc200\_rome\_C\_lib/32  
:"  
MALLOC\_CONF = "retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "32"

Environment variables set by runcpu during the 603.bwaves\_s peak run:  
GOMP\_CPU\_AFFINITY = "0 16 1 17 2 18 3 19 4 20 5 21 6 22 7 23 8 24 9 25 10 26  
11 27 12 28 13 29 14 30 15 31"

Environment variables set by runcpu during the 621.wrf\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-15"

Environment variables set by runcpu during the 627.cam4\_s peak run:  
GOMP\_CPU\_AFFINITY = "0 16 1 17 2 18 3 19 4 20 5 21 6 22 7 23 8 24 9 25 10 26  
11 27 12 28 13 29 14 30 15 31"

Environment variables set by runcpu during the 628.pop2\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-15"

Environment variables set by runcpu during the 644.nab\_s peak run:  
GOMP\_CPU\_AFFINITY = "0 16 1 17 2 18 3 19 4 20 5 21 6 22 7 23 8 24 9 25 10 26  
11 27 12 28 13 29 14 30 15 31"

### General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.  
jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
3.20 GHz, AMD EPYC 7262

SPECspeed®2017\_fp\_base = 87.6

SPECspeed®2017\_fp\_peak = 92.9

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Dec-2019

### General Notes (Continued)

jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

### Platform Notes

BIOS settings:  
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
NUMA nodes per socket set to NPS2  
SOC P-States set to P0  
Global C-state Control set to Disable

Sysinfo program /home/cpu2017-1.1.0-amd-rome-aocc200-C3/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on linux-d9uk Fri May 29 23:30:34 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : AMD EPYC 7262 8-Core Processor  
2 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 16  
physical 0: cores 0 4 8 12 16 20 24 28  
physical 1: cores 0 4 8 12 16 20 24 28

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
Address sizes: 43 bits physical, 48 bits virtual  
CPU(s): 32  
On-line CPU(s) list: 0-31  
Thread(s) per core: 2  
Core(s) per socket: 8  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: AuthenticAMD  
CPU family: 23  
Model: 49  
Model name: AMD EPYC 7262 8-Core Processor

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
3.20 GHz, AMD EPYC 7262

SPECspeed®2017\_fp\_base = 87.6

SPECspeed®2017\_fp\_peak = 92.9

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2020

Hardware Availability: Jun-2020

Software Availability: Dec-2019

### Platform Notes (Continued)

```
Stepping: 0
CPU MHz: 3200.000
CPU max MHz: 3200.0000
CPU min MHz: 1500.0000
BogoMIPS: 6387.89
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0-3,16-19
NUMA node1 CPU(s): 4-7,20-23
NUMA node2 CPU(s): 8-11,24-27
NUMA node3 CPU(s): 12-15,28-31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs
skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb cat_l3
cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd
arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor
smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 16 17 18 19
node 0 size: 257852 MB
node 0 free: 257597 MB
node 1 cpus: 4 5 6 7 20 21 22 23
node 1 size: 258003 MB
node 1 free: 257798 MB
node 2 cpus: 8 9 10 11 24 25 26 27
node 2 size: 258045 MB
node 2 free: 257780 MB
node 3 cpus: 12 13 14 15 28 29 30 31
node 3 size: 258044 MB
node 3 free: 257866 MB
node distances:
node 0 1 2 3
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
3.20 GHz, AMD EPYC 7262

SPECspeed®2017\_fp\_base = 87.6

SPECspeed®2017\_fp\_peak = 92.9

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Dec-2019

### Platform Notes (Continued)

```
0: 10 12 32 32
1: 12 10 32 32
2: 32 32 10 12
3: 32 32 12 10
```

From /proc/meminfo

```
MemTotal:      1056712856 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 5
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

```
os-release:
NAME="SLES"
VERSION="12-SP5"
VERSION_ID="12.5"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP5"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp5"
```

uname -a:

```
Linux linux-d9uk 4.12.14-120-default #1 SMP Thu Nov 7 16:39:09 UTC 2019 (fd9dc36)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
itlb_multihit:                Not affected
CVE-2018-3620 (L1 Terminal Fault):  Not affected
Microarchitectural Data Sampling:  Not affected
CVE-2017-5754 (Meltdown):         Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):  Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):  Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling
tsx_async_abort:                Not affected
```

run-level 3 May 29 23:27

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
3.20 GHz, AMD EPYC 7262

SPECspeed®2017\_fp\_base = 87.6

SPECspeed®2017\_fp\_peak = 92.9

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Dec-2019

### Platform Notes (Continued)

SPEC is set to: /home/cpu2017-1.1.0-amd-rome-aocc200-C3  
Filesystem      Type   Size   Used   Avail   Use%   Mounted on  
/dev/sdb3        xfs   889G   81G   808G   10%   /

From /sys/devices/virtual/dmi/id  
BIOS:      Lenovo D8E105P-1.00 05/08/2020  
Vendor:    Lenovo  
Product:   ThinkSystem SR645 MB  
Product Family: ThinkSystem  
Serial:    1234567890

Additional information from dmidecode follows.   WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
32x Samsung M393A4G43AB3-CWE 32 kB 2 rank 3200

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C                   | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
644.nab\_s(base, peak)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
  AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
-----

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
  AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
  AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
3.20 GHz, AMD EPYC 7262

SPECspeed®2017\_fp\_base = 87.6

SPECspeed®2017\_fp\_peak = 92.9

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** May-2020

**Hardware Availability:** Jun-2020

**Software Availability:** Dec-2019

### Compiler Version Notes (Continued)

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

```
-----
Fortran          | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                  | 654.roms_s(base, peak)
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

```
-----
Fortran, C       | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                  | 628.pop2_s(base, peak)
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

### Base Compiler Invocation

C benchmarks:  
clang

Fortran benchmarks:  
flang

Benchmarks using both Fortran and C:  
flang clang

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017\_fp\_base = 87.6

ThinkSystem SR645  
3.20 GHz, AMD EPYC 7262

SPECspeed®2017\_fp\_peak = 92.9

CPU2017 License: 9017

Test Date: May-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2020

Tested by: Lenovo Global Technology

Software Availability: Dec-2019

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -z muldefs -DSPEC\_OPENMP -fopenmp  
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc  
-lflang

Fortran benchmarks:

-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2  
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs  
-Kieee -fno-finite-math-only -DSPEC\_OPENMP -fopenmp -fopenmp=libomp  
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang

Benchmarks using both Fortran and C:

-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR645  
3.20 GHz, AMD EPYC 7262

SPECspeed®2017\_fp\_base = 87.6

SPECspeed®2017\_fp\_peak = 92.9

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2020

Hardware Availability: Jun-2020

Software Availability: Dec-2019

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-fstruct-layout=3 -mllvm -unroll-threshold=50 -freemap-arrays
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread -ldl -lmvec
-lamdlibm -ljemalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR645  
3.20 GHz, AMD EPYC 7262

SPECspeed®2017\_fp\_base = 87.6

SPECspeed®2017\_fp\_peak = 92.9

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** May-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Dec-2019

## Peak Compiler Invocation (Continued)

Fortran benchmarks:  
flang

Benchmarks using both Fortran and C:  
flang clang

Benchmarks using Fortran, C, and C++:  
clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -mno-sse4a -fstruct-layout=5  
-mllvm -vectorize-memory-aggressively  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -vector-library=LIBMVEC  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-flv-function-specialization -DSPEC\_OPENMP -fopenmp  
-lmvec -lamdlibm -fopenmp=libomp -lomp -lpthread -ldl  
-ljemalloc -lflang

Fortran benchmarks:

603.bwaves\_s: -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR645  
3.20 GHz, AMD EPYC 7262

SPECspeed®2017\_fp\_base = 87.6

SPECspeed®2017\_fp\_peak = 92.9

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** May-2020

**Hardware Availability:** Jun-2020

**Software Availability:** Dec-2019

## Peak Optimization Flags (Continued)

603.bwaves\_s (continued):

```
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver2 -funroll-loops -Mrecursive
-mllvm -vector-library=LIBMVEC -Kieee
-fno-finite-math-only -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -O3 -funroll-loops -Mrecursive -Kieee
-fno-finite-math-only -DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp
-lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
3.20 GHz, AMD EPYC 7262

SPECspeed®2017\_fp\_base = 87.6

SPECspeed®2017\_fp\_peak = 92.9

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** May-2020

**Hardware Availability:** Jun-2020

**Software Availability:** Dec-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome2P-K.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome2P-K.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-05-29 11:30:33-0400.

Report generated on 2020-06-23 18:10:48 by CPU2017 PDF formatter v6255.

Originally published on 2020-06-23.