



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 201

ThinkSystem SR650 V2  
(3.00 GHz, Intel Xeon Gold 5317)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Date: Jul-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Dec-2020

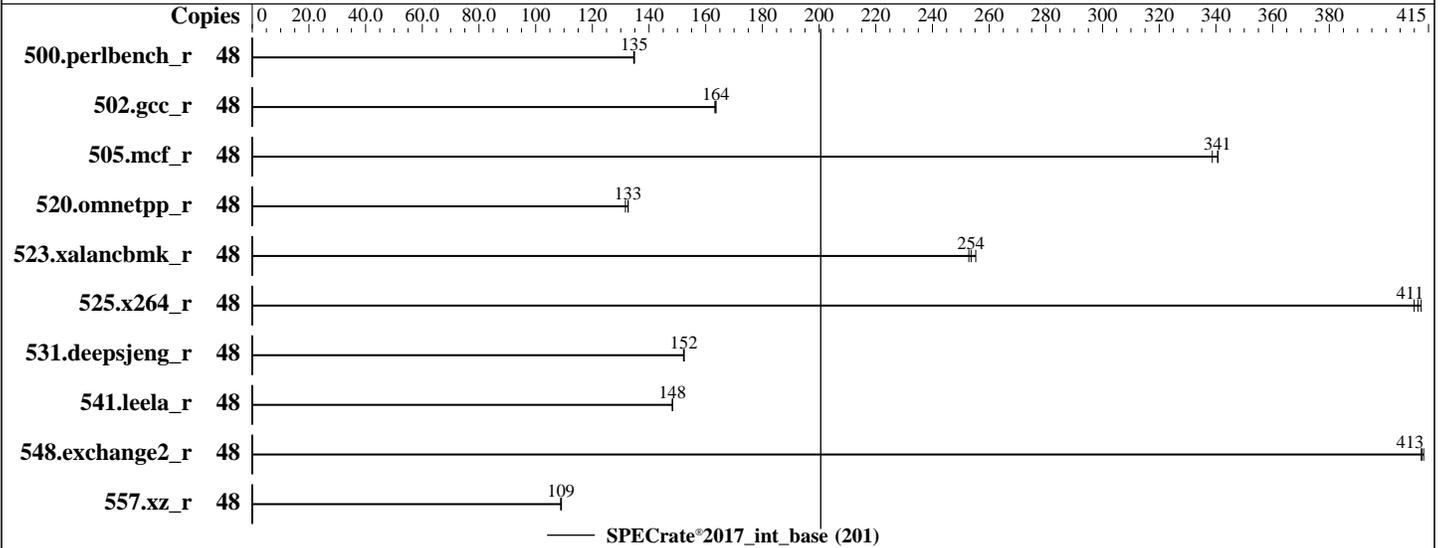

### Hardware

CPU Name: Intel Xeon Gold 5317  
 Max MHz: 3600  
 Nominal: 3000  
 Enabled: 24 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 18 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R, running at 2933)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)  
 Kernel 4.18.0-240.el8.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
 Parallel: No  
 Firmware: Lenovo BIOS Version AFE111A 1.02 released May-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 201

ThinkSystem SR650 V2  
(3.00 GHz, Intel Xeon Gold 5317)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Jul-2021  
Hardware Availability: Jul-2021  
Software Availability: Dec-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	<b>567</b>	<b>135</b>	567	135	568	135							
502.gcc_r	48	416	164	<b>416</b>	<b>164</b>	416	163							
505.mcf_r	48	228	341	<b>228</b>	<b>341</b>	229	339							
520.omnetpp_r	48	<b>475</b>	<b>133</b>	475	133	478	132							
523.xalancbmk_r	48	199	255	200	253	<b>200</b>	<b>254</b>							
525.x264_r	48	<b>204</b>	<b>411</b>	205	410	204	412							
531.deepsjeng_r	48	362	152	<b>361</b>	<b>152</b>	361	152							
541.leela_r	48	536	148	536	148	<b>536</b>	<b>148</b>							
548.exchange2_r	48	305	412	304	413	<b>305</b>	<b>413</b>							
557.xz_r	48	<b>476</b>	<b>109</b>	476	109	475	109							

SPECrate®2017\_int\_base = 201

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-1.1.8-ic2021.1-revB/lib/intel64:/home/cpu2017-1.1.8-ic2021.1-revB/lib/ia32:/home/cpu2017-1.1.8-ic2021.1-revB/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_int\_base = 201

ThinkSystem SR650 V2  
(3.00 GHz, Intel Xeon Gold 5317)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Jul-2021

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Jul-2021

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2020

## General Notes (Continued)

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
C-States set to Legacy  
Adjacent Cache Prefetch set to Disabled  
DCU Streamer Prefetcher set to Disabled  
SNC set to Enabled

sysinfo program /home/cpu2017-1.1.8-ic2021.1-revB/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost.localdomain Mon Jul 5 07:02:44 2021

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 5317 CPU @ 3.00GHz
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores      : 12
  siblings       : 24
  physical 0:    : cores 0 1 2 3 4 5 6 7 8 9 10 11
  physical 1:    : cores 0 1 2 3 4 5 6 7 8 9 10 11
```

From lscpu from util-linux 2.32.1:

```
Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
CPU(s):          48
On-line CPU(s) list: 0-47
Thread(s) per core: 2
Core(s) per socket: 12
Socket(s):       2
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 201

ThinkSystem SR650 V2  
(3.00 GHz, Intel Xeon Gold 5317)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Dec-2020

### Platform Notes (Continued)

```

NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Gold 5317 CPU @ 3.00GHz
Stepping: 6
CPU MHz: 1846.633
BogoMIPS: 6000.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 18432K
NUMA node0 CPU(s): 0-5,24-29
NUMA node1 CPU(s): 6-11,30-35
NUMA node2 CPU(s): 12-17,36-41
NUMA node3 CPU(s): 18-23,42-47

```

```

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid cqm rdt_a
avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 18432 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 24 25 26 27 28 29
node 0 size: 254615 MB
node 0 free: 257269 MB
node 1 cpus: 6 7 8 9 10 11 30 31 32 33 34 35
node 1 size: 254978 MB
node 1 free: 257782 MB
node 2 cpus: 12 13 14 15 16 17 36 37 38 39 40 41
node 2 size: 255182 MB
node 2 free: 257623 MB
node 3 cpus: 18 19 20 21 22 23 42 43 44 45 46 47

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 201

ThinkSystem SR650 V2  
(3.00 GHz, Intel Xeon Gold 5317)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jul-2021  
**Hardware Availability:** Jul-2021  
**Software Availability:** Dec-2020

### Platform Notes (Continued)

```
node 3 size: 255142 MB
node 3 free: 257738 MB
node distances:
node  0  1  2  3
  0:  10  11  20  20
  1:  11  10  20  20
  2:  20  20  10  11
  3:  20  20  11  10
```

```
From /proc/meminfo
MemTotal:      1056491688 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/sbin/tuned-adm active
Current active profile: balanced
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux release 8.3 (Ootpa)
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate®2017\_int\_base = 201

ThinkSystem SR650 V2  
(3.00 GHz, Intel Xeon Gold 5317)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Dec-2020

### Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaggs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Jul 5 07:01

```
SPEC is set to: /home/cpu2017-1.1.8-ic2021.1-revB
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   818G  160G  658G  20% /home
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR650 V2 MB
Product Family: ThinkSystem
Serial:          1234567890
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
 32x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200, configured at 2933
```

```
BIOS:
 BIOS Vendor:      Lenovo
 BIOS Version:    AFE111A-1.02
 BIOS Date:       05/07/2021
 BIOS Revision:   1.2
 Firmware Revision: 1.10
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
      | 525.x264_r(base) 557.xz_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate®2017\_int\_base = 201

ThinkSystem SR650 V2  
(3.00 GHz, Intel Xeon Gold 5317)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Jul-2021

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Jul-2021

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2020

## Compiler Version Notes (Continued)

```
=====
C++      | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
         | 541.leela_r(base)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran  | 548.exchange2_r(base)
=====
```

```
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====
```

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_int\_base = 201

ThinkSystem SR650 V2  
(3.00 GHz, Intel Xeon Gold 5317)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

### C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICelake-E.html>

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICelake-E.xml>

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-07-04 19:02:43-0400.

Report generated on 2021-07-21 15:52:12 by CPU2017 PDF formatter v6442.

Originally published on 2021-07-20.