



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 154

xFusion 2288H V6 (Intel Xeon Gold 6334)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488


Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: May-2021

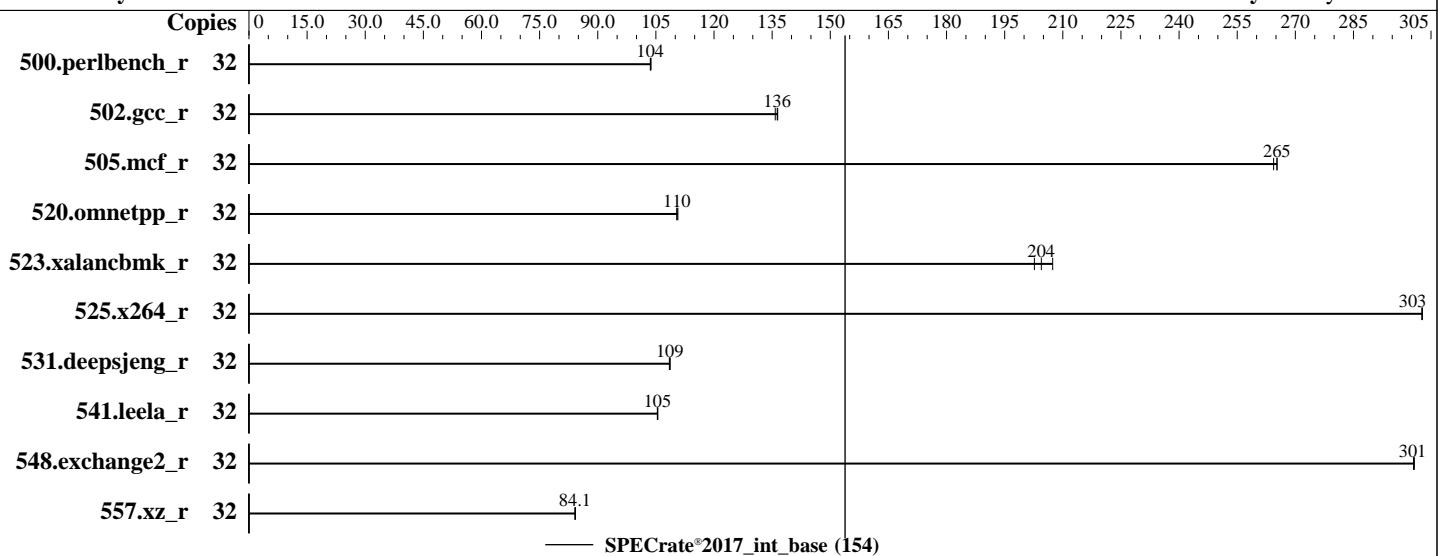

Hardware

CPU Name: Intel Xeon Gold 6334
 Max MHz: 3700
 Nominal: 3600
 Enabled: 16 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 18 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.4 (Ootpa) 4.18.0-305.el8.x86_64
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux
 Parallel: No
 Firmware: Version 0.95 Released Dec-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 154

xFusion 2288H V6 (Intel Xeon Gold 6334)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: May-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	492	104	492	104	491	104							
502.gcc_r	32	332	136	332	136	334	136							
505.mcf_r	32	196	264	195	265	195	265							
520.omnetpp_r	32	380	110	380	110	379	111							
523.xalancbmk_r	32	167	203	163	207	165	204							
525.x264_r	32	185	303	185	303	185	303							
531.deepsjeng_r	32	338	109	338	108	337	109							
541.leela_r	32	503	105	503	105	502	106							
548.exchange2_r	32	279	300	279	301	279	301							
557.xz_r	32	411	84.1	411	84.1	410	84.2							

SPECrate®2017_int_base = 154

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/spec2017/lib/intel64:/spec2017/lib/ia32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 154

xFusion 2288H V6 (Intel Xeon Gold 6334)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: May-2021

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Performance Profile Set to Performance

SNC Set to Enabled SNC2 (2-clusters)

Sysinfo program /spec2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on localhost.localdomain Fri Apr 1 13:38:00 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6334 CPU @ 3.60GHz
  2 "physical id"s (chips)
  32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 8
  siblings   : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
```

From lscpu from util-linux 2.32.1:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               32
On-line CPU(s) list: 0-31
Thread(s) per core:  2
Core(s) per socket:  8
Socket(s):            2
NUMA node(s):         4
Vendor ID:            GenuineIntel
BIOS Vendor ID:      Intel(R) Corporation
CPU family:           6
Model:                106
Model name:           Intel(R) Xeon(R) Gold 6334 CPU @ 3.60GHz
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 154

xFusion 2288H V6 (Intel Xeon Gold 6334)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: May-2021

Platform Notes (Continued)

BIOS Model name: Intel(R) Xeon(R) Gold 6334 CPU @ 3.60GHz
Stepping: 6
CPU MHz: 3599.575
BogoMIPS: 7200.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 18432K
NUMA node0 CPU(s): 0-3,16-19
NUMA node1 CPU(s): 4-7,20-23
NUMA node2 CPU(s): 8-11,24-27
NUMA node3 CPU(s): 12-15,28-31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpf perf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts hwp_epp avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid fsrm md_clear pconfig flush_lld arch_capabilities

/proc/cpuinfo cache data
cache size : 18432 KB

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 16 17 18 19
node 0 size: 128156 MB
node 0 free: 127709 MB
node 1 cpus: 4 5 6 7 20 21 22 23
node 1 size: 128984 MB
node 1 free: 128770 MB
node 2 cpus: 8 9 10 11 24 25 26 27
node 2 size: 129022 MB
node 2 free: 128699 MB
node 3 cpus: 12 13 14 15 28 29 30 31
node 3 size: 129019 MB
node 3 free: 128719 MB
node distances:
node 0 1 2 3

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 154

xFusion 2288H V6 (Intel Xeon Gold 6334)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: May-2021

Platform Notes (Continued)

```
0: 10 11 20 20  
1: 11 10 20 20  
2: 20 20 10 11  
3: 20 20 11 10
```

```
From /proc/meminfo  
MemTotal:      527547864 kB  
HugePages_Total:        0  
Hugepagesize:     2048 kB
```

```
/sbin/tuned-adm active  
Current active profile: throughput-performance
```

```
From /etc/*release* /etc/*version*  
os-release:  
  NAME="Red Hat Enterprise Linux"  
  VERSION="8.4 (Ootpa)"  
  ID="rhel"  
  ID_LIKE="fedora"  
  VERSION_ID="8.4"  
  PLATFORM_ID="platform:el8"  
  PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"  
  ANSI_COLOR="0;31"  
redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)  
system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga
```

```
uname -a:  
Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021  
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 154

xFusion 2288H V6 (Intel Xeon Gold 6334)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: May-2021

Platform Notes (Continued)

run-level 3 Apr 1 13:36

SPEC is set to: /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	420G	19G	402G	5%	/

From /sys/devices/virtual/dmi/id

Vendor:	XFUSION
Product:	2288H V6
Product Family:	Whitley
Serial:	123456

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

BIOS:

BIOS Vendor:	INSYDE Corp.
BIOS Version:	0.95
BIOS Date:	12/22/2021
BIOS Revision:	0.95

(End of data from sysinfo program)

Compiler Version Notes

=====

C	500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
	525.x264_r(base) 557.xz_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++	520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
	541.leela_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 154

xFusion 2288H V6 (Intel Xeon Gold 6334)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Apr-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2021

Tested by: xFusion

Software Availability: May-2021

Compiler Version Notes (Continued)

=====
Fortran | 548.exchange2_r(base)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion	SPECrate®2017_int_base = 154
xFusion 2288H V6 (Intel Xeon Gold 6334)	SPECrate®2017_int_peak = Not Run
CPU2017 License: 6488	Test Date: Apr-2022
Test Sponsor: xFusion	Hardware Availability: Apr-2021
Tested by: xFusion	Software Availability: May-2021

Base Optimization Flags (Continued)

C benchmarks (continued):

-lqkmalloc

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fno-  
-mfpmath=sse -funroll-loops -fopt-mem-layout-trans=4  
-mbanches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lgkmalloc
```

The flags files that were used to format this result can be browsed at [this location](#).

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-ICX-V1.1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-ICX-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-04-01 13:38:00-0400.

Report generated on 2022-04-29 13:23:06 by CPU2017 PDF formatter v6442.

Originally published on 2022-04-27.