



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 283

PowerEdge XE9640 (Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6573


Test Date: Jun-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

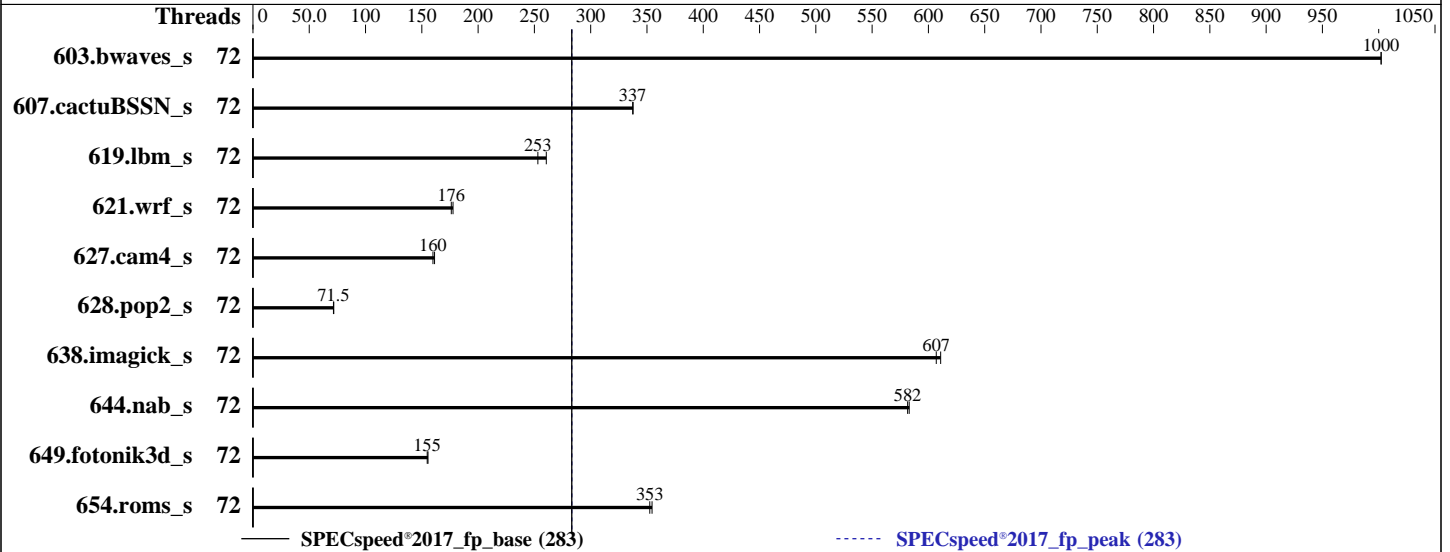

Hardware

CPU Name: Intel Xeon Platinum 8452Y
 Max MHz: 3200
 Nominal: 2000
 Enabled: 72 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 67.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 60 GB on tmpfs
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Version 0.5.35 released Jun-2023
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 283

PowerEdge XE9640 (Intel Xeon Platinum 8452Y)

SPECSpeed®2017_fp_peak = 283

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	72	58.9	1000	58.9	1000			72	58.9	1000	58.9	1000		
607.cactuBSSN_s	72	49.4	337	49.4	338			72	49.4	337	49.4	338		
619.lbm_s	72	20.7	253	20.1	261			72	20.7	253	20.1	261		
621.wrf_s	72	75.1	176	74.4	178			72	75.1	176	74.4	178		
627.cam4_s	72	55.4	160	54.9	161			72	55.4	160	54.9	161		
628.pop2_s	72	165	71.8	166	71.5			72	165	71.8	166	71.5		
638.imagick_s	72	23.6	611	23.8	607			72	23.6	611	23.8	607		
644.nab_s	72	30.0	582	30.0	583			72	30.0	582	30.0	583		
649.fotonik3d_s	72	58.6	155	58.9	155			72	58.6	155	58.9	155		
654.roms_s	72	44.4	355	44.7	353			72	44.4	355	44.7	353		

SPECSpeed®2017_fp_base = **283**

SPECSpeed®2017_fp_peak = **283**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 60 GB ramdisk created with the cmd: "mount -t tmpfs -o size=60G tmpfs /mnt/ramdisk"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 283

PowerEdge XE9640 (Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Dec-2022

Platform Notes

BIOS settings:

```

      ADDDC Setting : Disabled
      DIMM Self Healing on
Uncorrectable Memory Error : Disabled
      Logical Processor : Disabled
      Virtualization Technology : Disabled
      Sub NUMA Cluster : 2-way Clustering
      Optimizer Mode : Enabled

      System Profile : Custom
      CPU Power Management : Maximum Performance
      C1E : Disabled
      C States : Autonomous
      Memory Patrol Scrub : Disabled
      Energy Efficiency Policy : Performance
      PCI ASPM L1 Link
      Power Management : Disabled

```

```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Tue Jun 13 19:09:04 2023

```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

```

```

2. w
 19:09:04 up 2:52, 1 user, load average: 5.65, 6.20, 3.69

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 283

PowerEdge XE9640 (Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root      tty1    16:17   2:37m  1.52s  0.00s /bin/bash ./dell-run-speccpu.sh speed --define
DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define
DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define DL-VERS=v4.6 --define DL-LQC=1 --output_format html, pdf, txt

```

3. Username

From environment variable \$USER: root

4. ulimit -a

```

real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4124034
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4124034
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define DL-VERS=v4.6 --define
DL-LQC=1 --output_format html, pdf, txt
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define DL-VERS=v4.6 --define
DL-LQC=1 --output_format html, pdf, txt
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=72 --tune base,peak -o all --define
drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1 --define
DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define DL-VERS=v4.6 --define DL-LQC=1
--output_format html, pdf, txt fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=72 --tune base,peak --output_format all
--define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProcD=1
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-BIOS-SNC=2 --define DL-VERS=v4.6 --define
DL-LQC=1 --output_format html, pdf, txt --nopower --runmode speed --tune base:peak --size refspeed fpspeed
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.002/temlogs/preenv.fpspeed.002.0.log --lognum 002.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0

```

6. /proc/cpuinfo

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 283

PowerEdge XE9640 (Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

model name      : Intel(R) Xeon(R) Platinum 8452Y
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode     : 0x2b0004b1
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 36
siblings       : 36
2 physical ids (chips)
72 processors (hardware threads)
physical id 0: core ids 0-35
physical id 1: core ids 0-35
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 72
On-line CPU(s) list:   0-71
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel
Model name:             Intel(R) Xeon(R) Platinum 8452Y
BIOS Model name:       Intel(R) Xeon(R) Platinum 8452Y
CPU family:             6
Model:                  143
Thread(s) per core:    1
Core(s) per socket:    36
Socket(s):              2
Stepping:               8
BogoMIPS:               4000.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 sse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Lld cache:             3.4 MiB (72 instances)
Lli cache:             2.3 MiB (72 instances)

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 283

PowerEdge XE9640 (Intel Xeon Platinum 8452Y)

SPECSpeed®2017_fp_peak = 283

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

L2 cache:                144 MiB (72 instances)
L3 cache:                135 MiB (2 instances)
NUMA node(s):           4
NUMA node0 CPU(s):      0,2,6,10,14,16,20,22,26,32,38,44,46,48,52,56,64,68
NUMA node1 CPU(s):      4,8,12,18,24,28,30,34,36,40,42,50,54,58,60,62,66,70
NUMA node2 CPU(s):      1,5,11,15,19,23,27,29,31,37,41,43,47,51,55,57,67,69
NUMA node3 CPU(s):      3,7,9,13,17,21,25,33,35,39,45,49,53,59,61,63,65,71
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.4M	12	Data	1	64	1	64
L1i	32K	2.3M	8	Instruction	1	64	1	64
L2	2M	144M	16	Unified	2	2048	1	64
L3	67.5M	135M	15	Unified	3	73728	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0,2,6,10,14,16,20,22,26,32,38,44,46,48,52,56,64,68
node 0 size: 256984 MB
node 0 free: 246922 MB
node 1 cpus: 4,8,12,18,24,28,30,34,36,40,42,50,54,58,60,62,66,70
node 1 size: 258007 MB
node 1 free: 257786 MB
node 2 cpus: 1,5,11,15,19,23,27,29,31,37,41,43,47,51,55,57,67,69
node 2 size: 258043 MB
node 2 free: 257786 MB
node 3 cpus: 3,7,9,13,17,21,25,33,35,39,45,49,53,59,61,63,65,71
node 3 size: 258033 MB
node 3 free: 257810 MB
node distances:
node  0  1  2  3
0:  10  12  21  21
1:  12  10  21  21
2:  21  21  10  12
3:  21  21  12  10

```

9. /proc/meminfo

MemTotal: 1055814788 kB

10. who -r

run-level 3 Jun 13 16:16

11. Systemd service manager version: systemd 250 (250-6.el9_0)

```

Default Target Status
multi-user      running

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 283

PowerEdge XE9640 (Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6573

Test Date: Jun-2023

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

12. Services, from systemctl list-unit-files

```

STATE          UNIT FILES
enabled        ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
                gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
                low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
                nvme-fc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
                rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control
                systemd-network-generator udisks2 upower vgauthd vmtoolsd
enabled-runtime systemd-remount-fs
disabled       arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
                canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
                dbus-daemon debug-shell dnsmasq iprump iprint ipupdate iscsid iscsiui kpatch kvm_stat
                ledmon man-db-restart-cache-update nftables nvme-fc-autoconnect podman podman-auto-update
                podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmbd-rebuild
                serial-getty@ speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures
                systemd-pstore systemd-sysext wpa_supplicant
indirect       spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

14. cpupower frequency-info

```

analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

15. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 283

PowerEdge XE9640 (Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Dec-2022

Platform Notes (Continued)

vm.zone_reclaim_mode 0

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000
-----
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)
-----
```

```
-----
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs            tmpfs 60G  4.2G  56G   7% /mnt/ramdisk
-----
```

```
-----
20. /sys/devices/virtual/dmi/id
Vendor:         Dell Inc.
Product:        PowerEdge XE9640
Product Family: PowerEdge
Serial:         MS01513
-----
```

```
-----
21. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
14x 00AD063200AD HMC94MEBRA109N 64 GB 2 rank 4800
2x 00CE00B300CE M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
-----
```

```
-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Dell Inc.
BIOS Version:     0.5.35
BIOS Date:        06/12/2023
BIOS Revision:    0.5
-----
```




SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 283

PowerEdge XE9640 (Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Compiler Version Notes

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 283

PowerEdge XE9640 (Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Dec-2022

Base Portability Flags

```

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

Fortran benchmarks:

```

-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

Benchmarks using both Fortran and C:

```

-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```

Benchmarks using Fortran, C, and C++:

```

-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 283

PowerEdge XE9640 (Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jun-2023
Hardware Availability: Sep-2023
Software Availability: Dec-2022

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 283

PowerEdge XE9640 (Intel Xeon Platinum 8452Y)

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.5.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-13 19:09:03-0400.

Report generated on 2023-09-13 14:48:49 by CPU2017 PDF formatter v6716.

Originally published on 2023-09-13.