



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rh-1
(Intel Xeon processor X5450)

SPECfp®_rate2006 = 74.1

SPECfp_rate_base2006 = 65.9

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jan-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

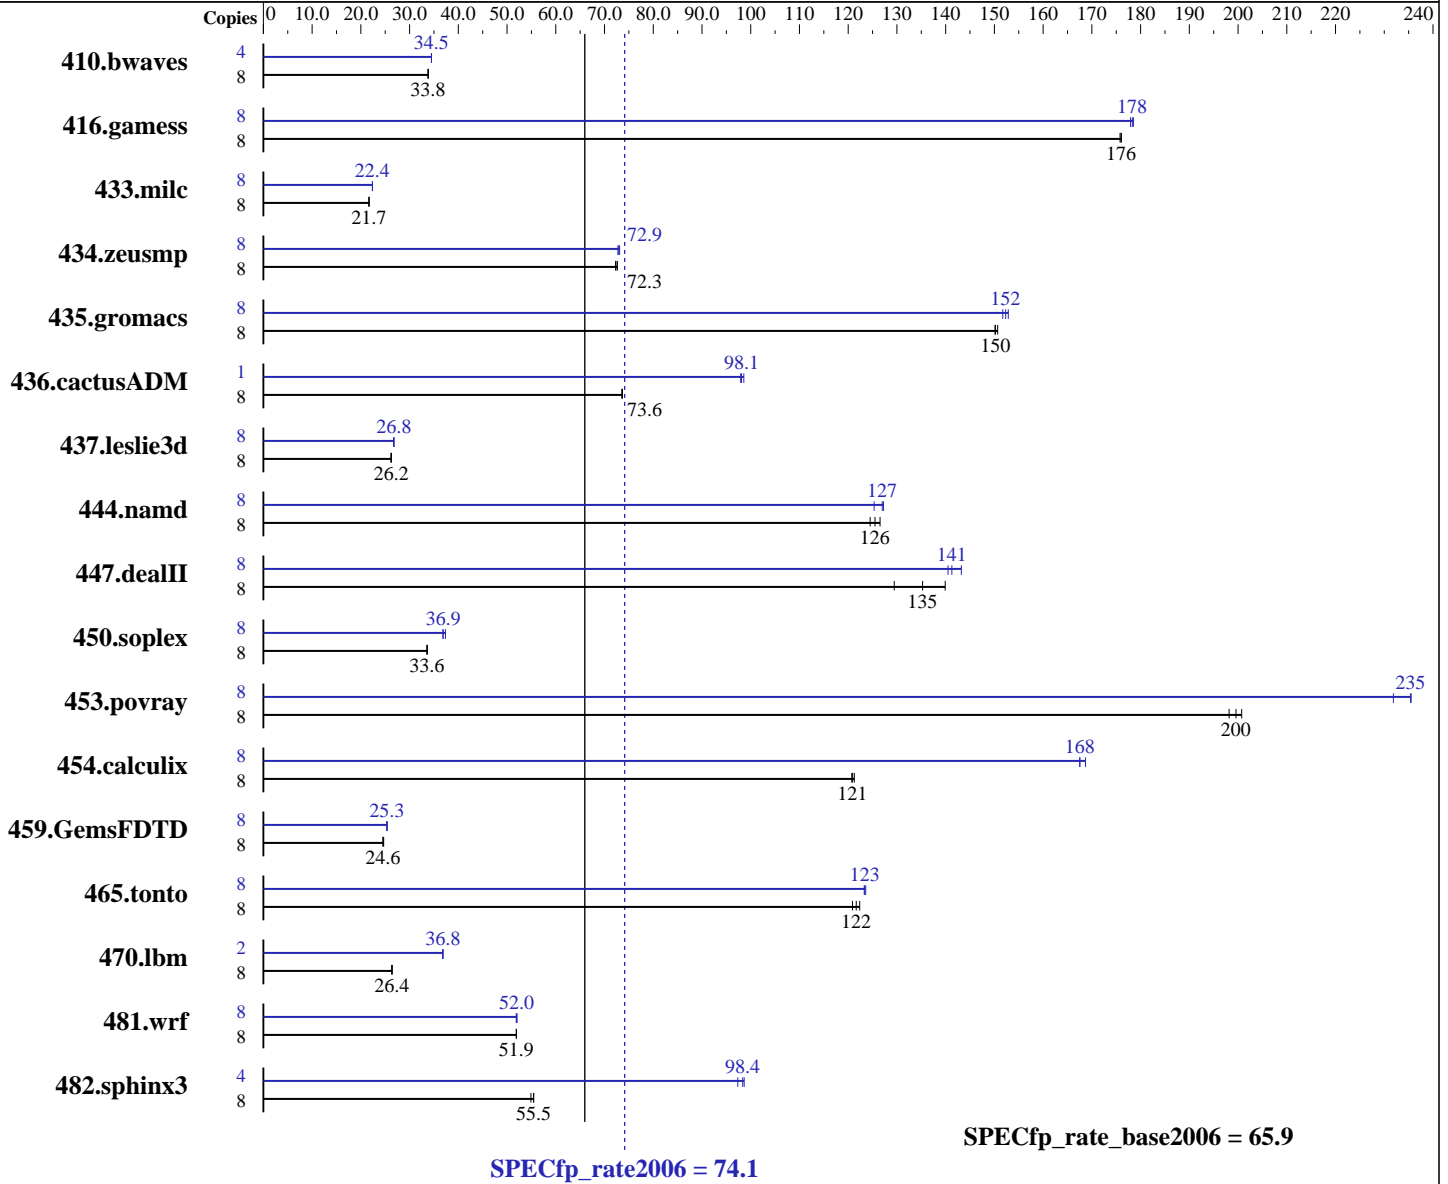

Hardware

CPU Name: Intel Xeon X5450
 CPU Characteristics: 3.00 GHz, 2x6 MB L2 shared, 1333 MHz bus
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smpp
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
 Auto Parallel: Yes
 File System: ext2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rh-1
(Intel Xeon processor X5450)

SPECfp_rate2006 = 74.1

SPECfp_rate_base2006 = 65.9

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jan-2008
Hardware Availability: Dec-2007
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 12 GB (12x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x73.2 GB SAS, 15000RPM
Other Hardware: None

System State: Multiuser, Runlevel 3
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: binutils-2.17.tar.gz, Version 2.17

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3217	33.8	<u>3215</u>	<u>33.8</u>	3214	33.8	4	1576	34.5	1576	34.5	<u>1576</u>	<u>34.5</u>
416.gamess	8	<u>890</u>	<u>176</u>	890	176	891	176	8	877	179	880	178	<u>879</u>	<u>178</u>
433.milc	8	3389	21.7	3387	21.7	<u>3388</u>	<u>21.7</u>	8	<u>3281</u>	<u>22.4</u>	3284	22.4	3280	22.4
434.zeusmp	8	<u>1006</u>	<u>72.3</u>	1007	72.3	1002	72.6	8	<u>998</u>	<u>72.9</u>	1001	72.7	996	73.1
435.gromacs	8	<u>380</u>	<u>150</u>	379	151	380	150	8	376	152	<u>375</u>	<u>152</u>	374	153
436.cactusADM	8	<u>1299</u>	<u>73.6</u>	1297	73.7	1299	73.6	1	122	97.9	121	98.6	<u>122</u>	<u>98.1</u>
437.leslie3d	8	<u>2868</u>	<u>26.2</u>	2872	26.2	2862	26.3	8	2811	26.7	<u>2809</u>	<u>26.8</u>	2806	26.8
444.namd	8	507	127	515	125	<u>511</u>	<u>126</u>	8	512	125	<u>505</u>	<u>127</u>	504	127
447.dealII	8	<u>677</u>	<u>135</u>	707	129	654	140	8	639	143	<u>648</u>	<u>141</u>	651	140
450.soplex	8	1987	33.6	<u>1987</u>	<u>33.6</u>	1983	33.6	8	1811	36.8	<u>1808</u>	<u>36.9</u>	1786	37.4
453.povray	8	<u>213</u>	<u>200</u>	215	198	212	201	8	<u>181</u>	<u>235</u>	184	232	181	236
454.calculix	8	<u>546</u>	<u>121</u>	544	121	547	121	8	391	169	<u>394</u>	<u>168</u>	394	168
459.GemsFDTD	8	<u>3457</u>	<u>24.6</u>	3439	24.7	3458	24.5	8	3338	25.4	3354	25.3	<u>3349</u>	<u>25.3</u>
465.tonto	8	<u>647</u>	<u>122</u>	651	121	643	122	8	<u>638</u>	<u>123</u>	637	124	638	123
470.lbm	8	4159	26.4	<u>4167</u>	<u>26.4</u>	4170	26.4	2	746	36.9	747	36.8	<u>746</u>	<u>36.8</u>
481.wrf	8	1722	51.9	<u>1721</u>	<u>51.9</u>	1720	51.9	8	1722	51.9	<u>1719</u>	<u>52.0</u>	1717	52.0
482.sphinx3	8	<u>2812</u>	<u>55.5</u>	2840	54.9	2812	55.5	4	801	97.3	790	98.7	<u>793</u>	<u>98.4</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
OMP_NUM_THREADS set to number of cores (default).

Platform Notes

Bios settings:
Intel SpeedStep Technology: Disabled



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rh-1
(Intel Xeon processor X5450)

SPECfp_rate2006 = 74.1

SPECfp_rate_base2006 = 65.9

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jan-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3, for peak, are compiled in 32-bit mode

The NEC Express5800/120Rh-1(Intel Xeon Processor X5450), the NEC Express5800/120Rj-2(Intel Xeon Processor X5450), the Bull NovaScale R440 E1 (Intel Xeon X5450,3.00GHz) and the Bull NovaScale R460 E1 (Intel Xeon X5450,3.00GHz) models are electronically equivalent. The results have been measured on a NEC Express5800/120Rj-2(Intel Xeon Processor X5450) model.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rh-1
(Intel Xeon processor X5450)

SPECfp_rate2006 = 74.1

SPECfp_rate_base2006 = 65.9

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Jan-2008
Hardware Availability: Dec-2007
Software Availability: Nov-2007

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks (except as noted below):
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

433.milc: icc

C++ benchmarks (except as noted below):
icpc

450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include

Fortran benchmarks (except as noted below):
ifort

437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib
-I/opt/intel/fc/10.1.008/include

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rh-1
(Intel Xeon processor X5450)

SPECfp_rate2006 = 74.1

SPECfp_rate_base2006 = 65.9

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jan-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

Peak Portability Flags (Continued)

```

453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
         -auto-ilp32

```

```

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
        -scalar-rep- -prefetch -opt-malloc-options=3

```

```

482.sphinx3: -fast -unroll2

```

C++ benchmarks:

```

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
         -auto-ilp32

```

```

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
          -ansi-alias -scalar-rep-

```

```

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
          -opt-malloc-options=3

```

```

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
          -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: -fast -prefetch

```

```

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
          -ansi-alias -scalar-rep-

```

```

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

```

```

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
            -opt-malloc-options=3

```

```

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
            -prefetch

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/120Rh-1
(Intel Xeon processor X5450)

SPECfp_rate2006 = 74.1

SPECfp_rate_base2006 = 65.9

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jan-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090714.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.20090714.01.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 16:24:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 February 2008.