



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x440
(Intel Xeon E5-4650, 2.70 GHz)

SPECfp[®]_rate2006 = 888

SPECfp_rate_base2006 = 863

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2012

Hardware Availability: Aug-2012

Software Availability: Dec-2011

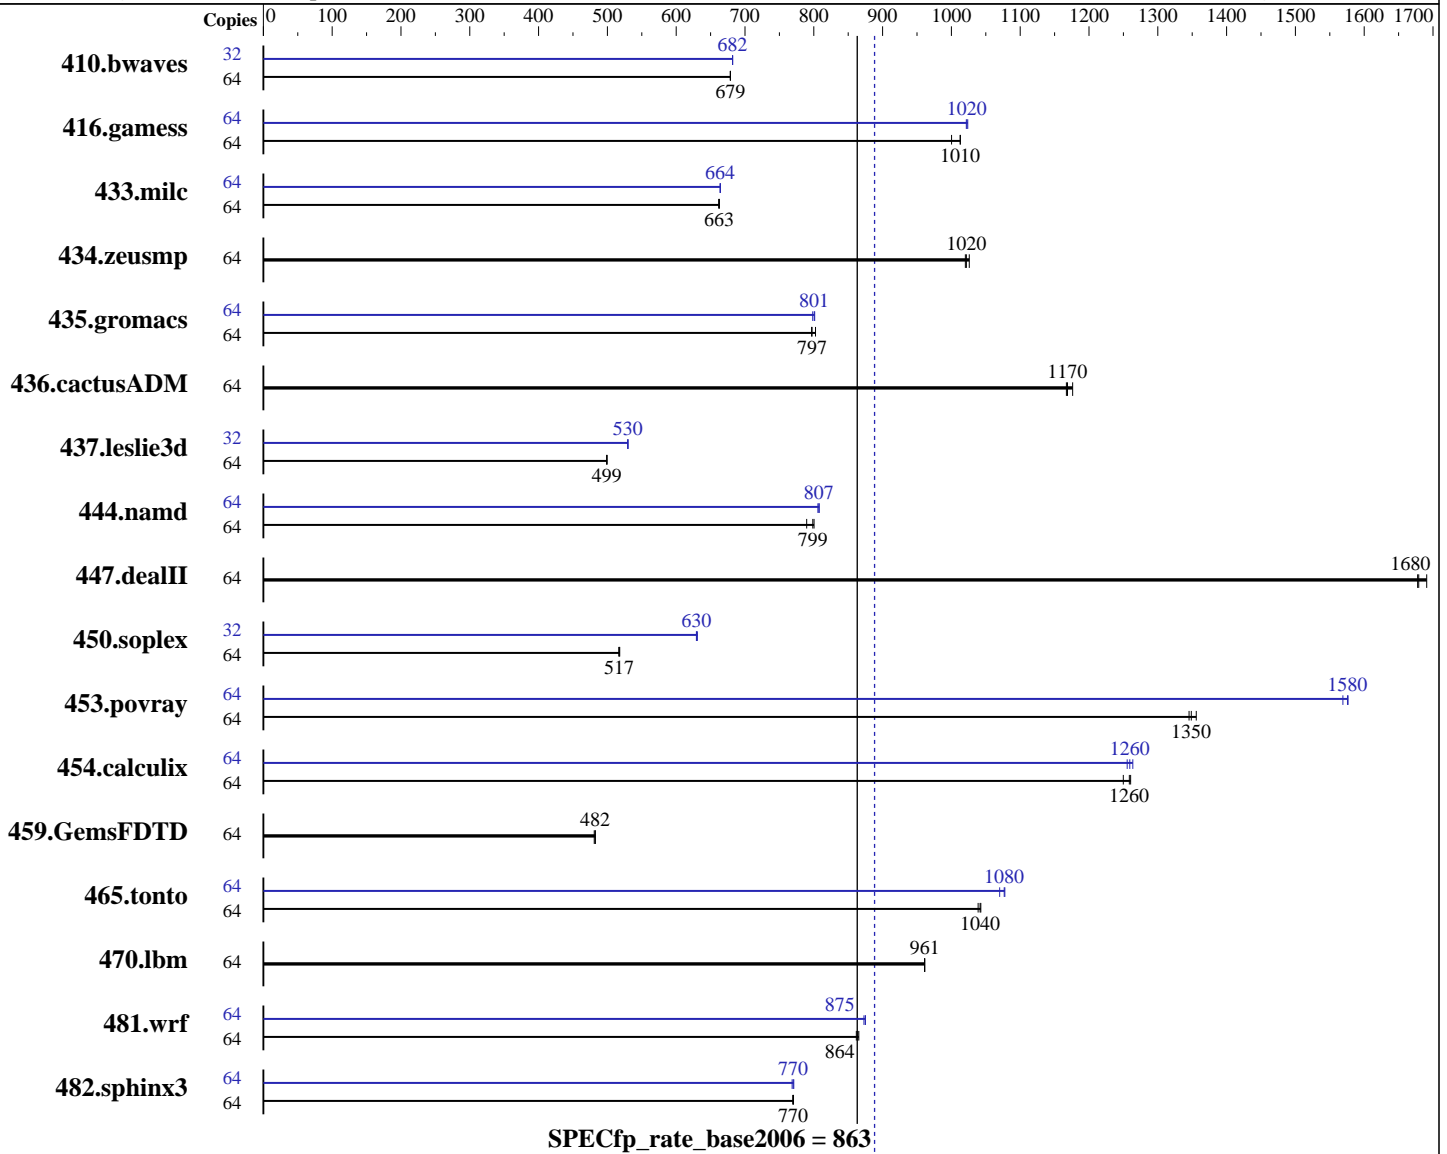

Hardware

CPU Name: Intel Xeon E5-4650
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x440
(Intel Xeon E5-4650, 2.70 GHz)

SPECfp_rate2006 = **888**

SPECfp_rate_base2006 = **863**

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2012
Hardware Availability: Aug-2012
Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 300 GB SAS, 10000 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1282	679	<u>1281</u>	<u>679</u>	1281	679	32	638	682	<u>638</u>	<u>682</u>	637	682
416.gamess	64	1253	1000	1237	1010	<u>1237</u>	<u>1010</u>	64	1224	1020	<u>1225</u>	<u>1020</u>	1226	1020
433.milc	64	886	663	<u>887</u>	<u>663</u>	888	662	64	<u>885</u>	<u>664</u>	884	664	885	664
434.zeusmp	64	571	1020	<u>570</u>	<u>1020</u>	568	1030	64	571	1020	<u>570</u>	<u>1020</u>	568	1030
435.gromacs	64	569	803	573	797	<u>573</u>	<u>797</u>	64	<u>571</u>	<u>801</u>	570	801	572	798
436.cactusADM	64	<u>654</u>	<u>1170</u>	650	1180	655	1170	64	<u>654</u>	<u>1170</u>	650	1180	655	1170
437.leslie3d	64	1205	499	1204	500	<u>1205</u>	<u>499</u>	32	<u>568</u>	<u>530</u>	568	530	568	530
444.namd	64	641	800	<u>643</u>	<u>799</u>	650	790	64	<u>636</u>	<u>807</u>	635	808	637	806
447.dealII	64	433	1690	<u>436</u>	<u>1680</u>	436	1680	64	433	1690	<u>436</u>	<u>1680</u>	436	1680
450.soplex	64	1033	517	1031	518	<u>1032</u>	<u>517</u>	32	423	631	<u>424</u>	<u>630</u>	424	629
453.povray	64	<u>252</u>	<u>1350</u>	251	1360	253	1350	64	217	1570	216	1580	<u>216</u>	<u>1580</u>
454.calculix	64	419	1260	422	1250	<u>420</u>	<u>1260</u>	64	418	1260	<u>419</u>	<u>1260</u>	421	1260
459.GemsFDTD	64	<u>1408</u>	<u>482</u>	1412	481	1408	482	64	<u>1408</u>	<u>482</u>	1412	481	1408	482
465.tonto	64	604	1040	606	1040	<u>605</u>	<u>1040</u>	64	588	1070	<u>585</u>	<u>1080</u>	584	1080
470.lbm	64	<u>915</u>	<u>961</u>	915	961	915	961	64	<u>915</u>	<u>961</u>	915	961	915	961
481.wrf	64	830	862	<u>827</u>	<u>864</u>	826	865	64	<u>817</u>	<u>875</u>	817	875	819	873
482.sphinx3	64	1619	771	<u>1619</u>	<u>770</u>	1621	769	64	1618	771	<u>1620</u>	<u>770</u>	1623	769

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Operating Mode set to Maximum Performance in BIOS
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x440
(Intel Xeon E5-4650, 2.70 GHz)

SPECfp_rate2006 = 888

SPECfp_rate_base2006 = 863

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2012
Hardware Availability: Aug-2012
Software Availability: Dec-2011

Platform Notes (Continued)

running on congo-pete Fri Jul 13 05:32:13 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4650 0 @ 2.70GHz
 4 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
  physical 2: cores 0 1 2 3 4 5 6 7
  physical 3: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      264501792 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux congo-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Dec 2 16:40

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_congopete-lv_root
                ext4      264G  5.8G  245G   3% /
```

Additional information from dmidecode:

```
Memory:
32x Micron 36JSF1G72PZ-1G6M1 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x440
(Intel Xeon E5-4650, 2.70 GHz)

SPECfp_rate2006 = 888

SPECfp_rate_base2006 = 863

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2012

Hardware Availability: Aug-2012

Software Availability: Dec-2011

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x440
(Intel Xeon E5-4650, 2.70 GHz)

SPECfp_rate2006 = 888

SPECfp_rate_base2006 = 863

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2012

Hardware Availability: Aug-2012

Software Availability: Dec-2011

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.deallI: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x440
(Intel Xeon E5-4650, 2.70 GHz)

SPECfp_rate2006 = 888

SPECfp_rate_base2006 = 863

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2012

Hardware Availability: Aug-2012

Software Availability: Dec-2011

Peak Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
 -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Flex System x440
(Intel Xeon E5-4650, 2.70 GHz)

SPECfp_rate2006 = 888

SPECfp_rate_base2006 = 863

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2012
Hardware Availability: Aug-2012
Software Availability: Dec-2011

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 10:49:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 August 2012.