



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro Processor Blade SBA-7222G-T2 (BHDGT,
Opteron 6344)
AMD Opteron 6344

SPECfp®_rate2006 = 360

SPECfp_rate_base2006 = 327

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

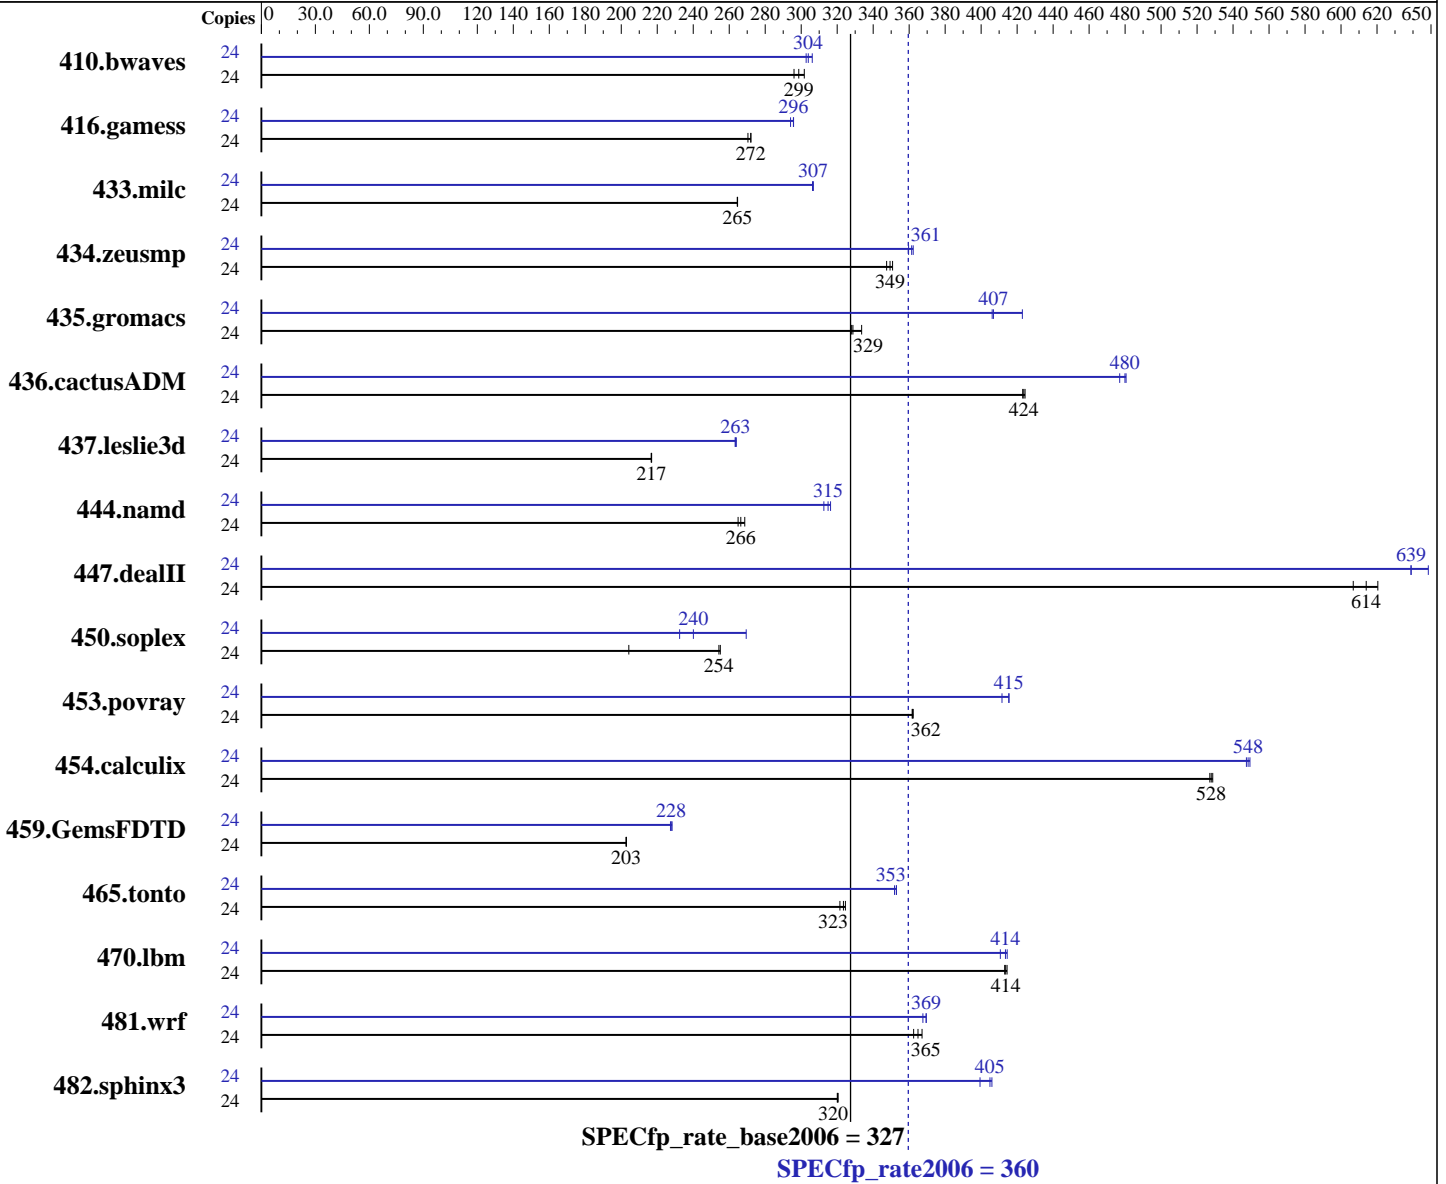

Hardware

CPU Name: AMD Opteron 6344
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chips

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2,
Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64
Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro Processor Blade SBA-7222G-T2 (BHDGT,
Opteron 6344)
AMD Opteron 6344

SPECfp_rate2006 = 360

SPECfp_rate_base2006 = 327

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Primary Cache: 384 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores
Other Cache: None
Memory: 64 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x XXX GB SATA, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	24	1081	302	1102	296	1092	299	24	1065	306	1077	303	1073	304		
416.gamess	24	1738	270	1728	272	1727	272	24	1589	296	1598	294	1589	296		
433.milc	24	833	265	833	265	833	264	24	718	307	719	306	719	307		
434.zeusmp	24	629	347	625	349	623	351	24	607	360	603	362	604	361		
435.gromacs	24	514	334	521	329	522	328	24	421	407	422	406	405	423		
436.cactusADM	24	677	424	678	423	676	424	24	598	480	597	481	601	477		
437.leslie3d	24	1041	217	1041	217	1040	217	24	855	264	856	263	857	263		
444.namd	24	722	266	717	269	727	265	24	609	316	616	313	611	315		
447.dealII	24	452	607	443	620	447	614	24	430	639	423	649	430	639		
450.soplex	24	980	204	787	254	785	255	24	834	240	861	232	743	269		
453.povray	24	353	362	353	362	352	362	24	307	416	307	415	310	412		
454.calculix	24	376	527	375	529	375	528	24	361	548	362	547	360	549		
459.GemsFDTD	24	1256	203	1255	203	1256	203	24	1120	227	1118	228	1116	228		
465.tonto	24	728	325	735	322	730	323	24	669	353	671	352	669	353		
470.lbm	24	797	414	796	414	798	413	24	797	414	796	414	803	411		
481.wrf	24	740	362	735	365	730	367	24	726	369	726	369	729	368		
482.sphinx3	24	1461	320	1459	321	1462	320	24	1152	406	1155	405	1171	399		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro Processor Blade SBA-7222G-T2 (BHDGT,
Opteron 6344)
AMD Opteron 6344

SPECfp_rate2006 = 360

SPECfp_rate_base2006 = 327

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Operating System Notes (Continued)

```
Set vm/nr_hugepages=11520 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_LIMIT = "480"
```

```
LD_LIBRARY_PATH = "/home/spec/amd1206-rate-libs-revA/32:/home/spec/amd1206-rate-libs-revA/64"
```

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

Base Compiler Invocation

C benchmarks:

```
opencc
```

C++ benchmarks:

```
openCC
```

Fortran benchmarks:

```
openf95
```

Benchmarks using both Fortran and C:

```
opencc openf95
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro Processor Blade SBA-7222G-T2 (BHDGT,
Opteron 6344)
AMD Opteron 6344

SPECfp_rate2006 = 360

SPECfp_rate_base2006 = 327

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Base Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1

C++ benchmarks:

-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on
-HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver1

Fortran benchmarks:

-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

Benchmarks using both Fortran and C:

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -LNO:blocking=off
-LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro Processor Blade SBA-7222G-T2 (BHDGT,
Opteron 6344)
AMD Opteron 6344

SPECfp_rate2006 = 360

SPECfp_rate_base2006 = 327

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Portability Flags (Continued)

435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
 -fno-second-underscore

Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
 -IPA:plimit=7000 -IPA:callee_limit=1200
 -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
 -march=bdver1

470.lbm: -Ofast -CG:cmp_peep=on -OPT:keep_ext=on -HP:bdt=2m:heap=2m
 -IPA:plimit=8000 -IPA:small_pu=100 -march=bdver1 -mso

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -m32 -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on
 -CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
 -INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
 -mso -march=bdver2

C++ benchmarks:

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
 -CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
 -fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
 -OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver1

447.dealIII: -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on
 -LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
 -CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
 -march=bdver1

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
 -LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
 -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
 -OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
 -m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro Processor Blade SBA-7222G-T2 (BHDGT,
Opteron 6344)
AMD Opteron 6344

SPECfp_rate2006 = 360

SPECfp_rate_base2006 = 327

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

450.soplex (continued):

-march=bdver1

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

-CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on

-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m

-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0

-march=bdver2

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off

-LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on

-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0

-HP:bd=2m:heap=2m -CG:cmp_peep=on -march=bdver1

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3

-OPT:recip=on -CG:local_sched_alg=1 -HP:bd=2m:heap=2m

-WOPT:sib=on -march=bdver1

434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500

-HP:bd=2m:heap=2m -march=bdver1

437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2

-HP:bd=2m:heap=2m -mso -march=bdver1

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024

-OPT:unroll_times_max=16 -LNO:fission=2

-CG:local_sched_alg=2 -HP -march=bdver1

465.tonto: -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off

-CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525

-HP:bd=2m:heap=2m -march=bdver1

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bd=2m:heap=2m

-CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on

-march=bdver1 -LNO:simd=3

436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast

-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0

-LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1

-CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1

454.calculix: -Ofast -OPT:unroll_size=256 -OPT:alias=disjoint

-GRA:optimize_boundary=on -CG:dsched=on -HP:bd=2m:heap=2m

-march=bdver1

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 6



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro Processor Blade SBA-7222G-T2 (BHDGT,
Opteron 6344)
AMD Opteron 6344

SPECfp_rate2006 = 360

SPECfp_rate_base2006 = 327

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

```
481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off
         -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP
         -WOPT:sib=on -march=bdver1
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:31:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 January 2013.