



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation


SPECfp[®]_rate2006 = 573

IBM NeXtScale nx360 M4
(Intel Xeon E5-2660 v2, 2.20 GHz)

SPECfp_rate_base2006 = 558

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

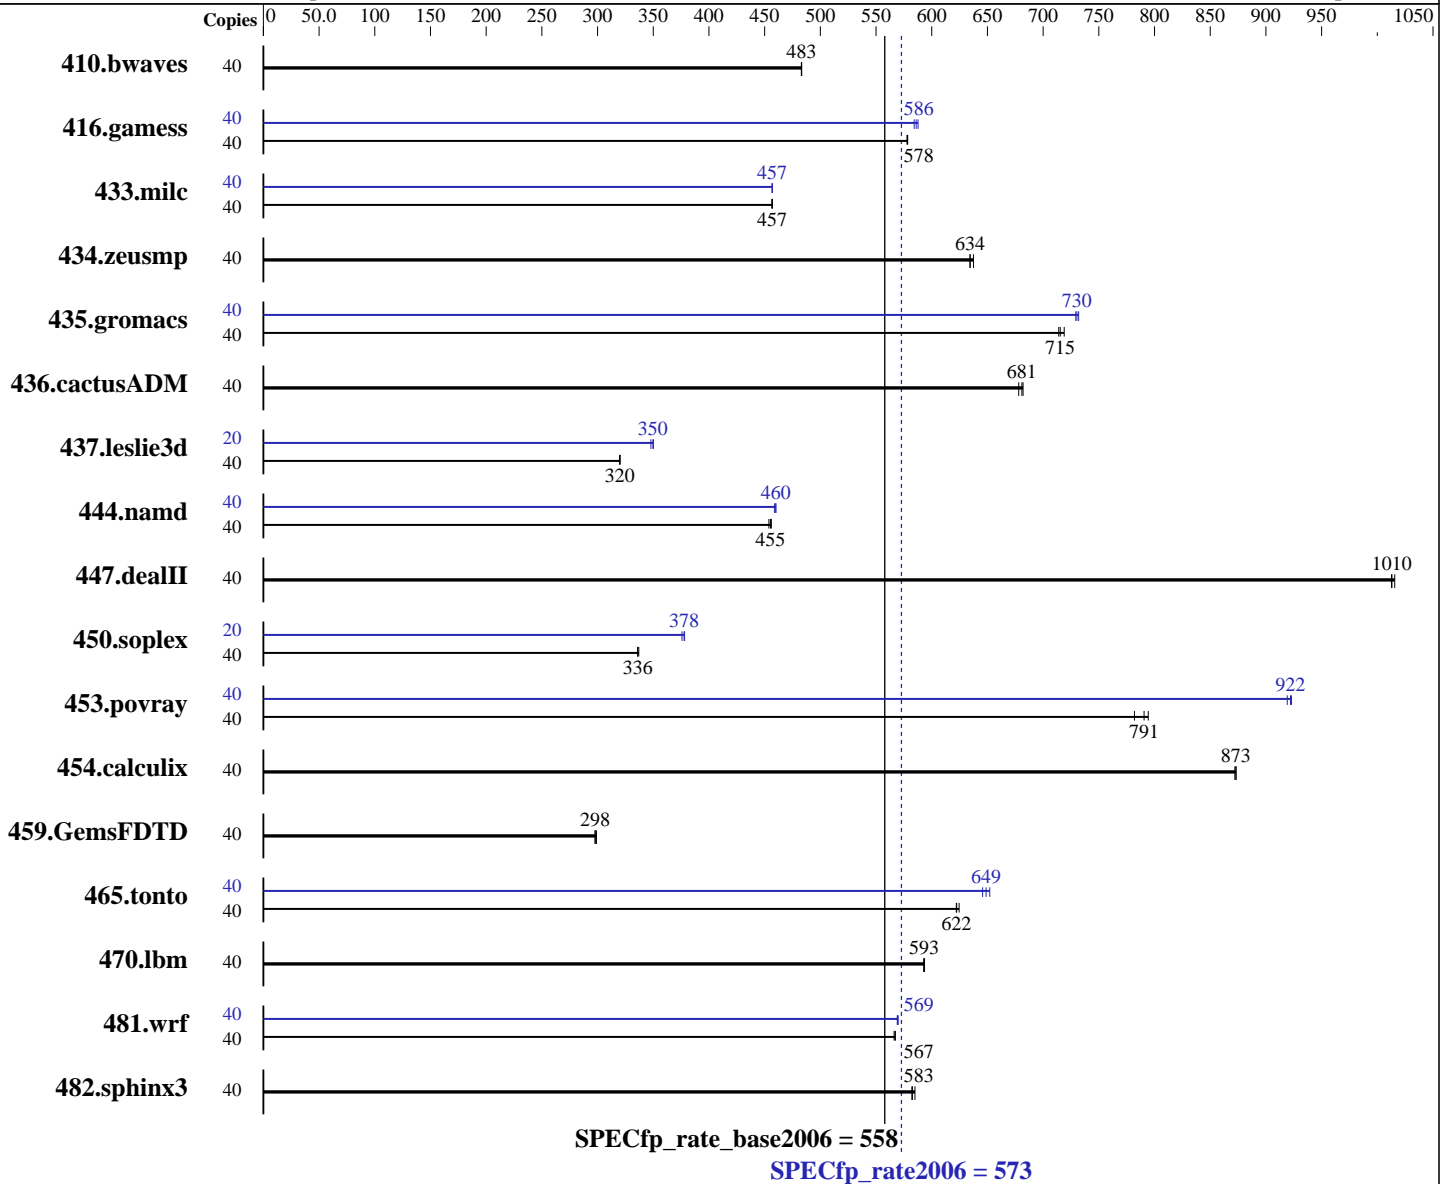

Hardware

CPU Name: Intel Xeon E5-2660 v2
CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz: 2200
FPU: Integrated
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
2.6.32-358.el6.x86_64
Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = **573**

IBM NeXtScale nx360 M4
(Intel Xeon E5-2660 v2, 2.20 GHz)

SPECfp_rate_base2006 = **558**

CPU2006 license: 11

Test date: Sep-2013

Test sponsor: IBM Corporation

Hardware Availability: Oct-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: 2 x 250 GB SATA, 7200 RPM, RAID 0
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	<u>1125</u>	<u>483</u>	1126	483	1125	483	40	<u>1125</u>	<u>483</u>	1126	483	1125	483
416.gamess	40	1356	578	<u>1355</u>	<u>578</u>	1354	578	40	1341	584	1333	588	<u>1336</u>	<u>586</u>
433.milc	40	<u>804</u>	<u>457</u>	804	457	804	456	40	804	457	804	457	<u>804</u>	<u>457</u>
434.zeusmp	40	<u>574</u>	<u>634</u>	574	634	571	637	40	<u>574</u>	<u>634</u>	574	634	571	637
435.gromacs	40	400	714	<u>399</u>	<u>715</u>	397	719	40	392	729	<u>391</u>	<u>730</u>	390	732
436.cactusADM	40	701	682	<u>702</u>	<u>681</u>	705	678	40	701	682	<u>702</u>	<u>681</u>	705	678
437.leslie3d	40	1174	320	1176	320	<u>1175</u>	<u>320</u>	20	<u>538</u>	<u>350</u>	540	348	537	350
444.namd	40	703	456	<u>705</u>	<u>455</u>	707	454	40	697	460	<u>697</u>	<u>460</u>	699	459
447.dealII	40	<u>452</u>	<u>1010</u>	452	1010	451	1020	40	<u>452</u>	<u>1010</u>	452	1010	451	1020
450.soplex	40	993	336	990	337	<u>993</u>	<u>336</u>	20	<u>442</u>	<u>378</u>	444	376	441	378
453.povray	40	272	782	268	794	<u>269</u>	<u>791</u>	40	231	923	232	919	<u>231</u>	<u>922</u>
454.calculix	40	378	872	<u>378</u>	<u>873</u>	378	873	40	378	872	<u>378</u>	<u>873</u>	378	873
459.GemsFDTD	40	1425	298	1419	299	<u>1425</u>	<u>298</u>	40	1425	298	1419	299	<u>1425</u>	<u>298</u>
465.tonto	40	<u>632</u>	<u>622</u>	630	625	633	622	40	610	646	604	652	<u>607</u>	<u>649</u>
470.lbm	40	926	594	927	593	<u>926</u>	<u>593</u>	40	926	594	927	593	<u>926</u>	<u>593</u>
481.wrf	40	789	566	788	567	<u>788</u>	<u>567</u>	40	784	570	<u>785</u>	<u>569</u>	785	569
482.sphinx3	40	1333	585	<u>1338</u>	<u>583</u>	1339	582	40	1333	585	<u>1338</u>	<u>583</u>	1339	582

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 573

IBM NeXtScale nx360 M4
(Intel Xeon E5-2660 v2, 2.20 GHz)

SPECfp_rate_base2006 = 558

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Platform Notes

BIOS setting:
Operating Mode set to Maximum Performance
Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on nx360M4 Thu Sep 12 06:38:15 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2660 v2 @ 2.20GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores      : 10
  siblings       : 20
  physical 0:    cores 0 1 2 3 4 8 9 10 11 12
  physical 1:    cores 0 1 2 3 4 8 9 10 11 12
cache size      : 25600 KB
```

```
From /proc/meminfo
MemTotal:        132227664 kB
HugePages_Total: 0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux nx360M4 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 11 17:06
```

```
SPEC is set to: /home/SPECcpu-new
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_xc360m4-lv_home
ext4            403G    228G  155G  60% /home
```

```
Additional information from dmidecode:
BIOS IBM  -[FHE105F1N-1.00]- 08/19/2013
Memory:
 8x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 573

IBM NeXtScale nx360 M4
(Intel Xeon E5-2660 v2, 2.20 GHz)

SPECfp_rate_base2006 = 558

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 573

IBM NeXtScale nx360 M4
(Intel Xeon E5-2660 v2, 2.20 GHz)

SPECfp_rate_base2006 = 558

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 573

IBM NeXtScale nx360 M4
(Intel Xeon E5-2660 v2, 2.20 GHz)

SPECfp_rate_base2006 = 558

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Peak Portability Flags (Continued)

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 573

IBM NeXtScale nx360 M4
(Intel Xeon E5-2660 v2, 2.20 GHz)

SPECfp_rate_base2006 = 558

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2013
Hardware Availability: Oct-2013
Software Availability: Sep-2013

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 17:01:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 October 2013.