



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint®2006 = 52.0

Huawei RH2288H V2 (Intel Xeon E5-2660 V2)

SPECint_base2006 = 47.9

CPU2006 license: 3175


Test date: Apr-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

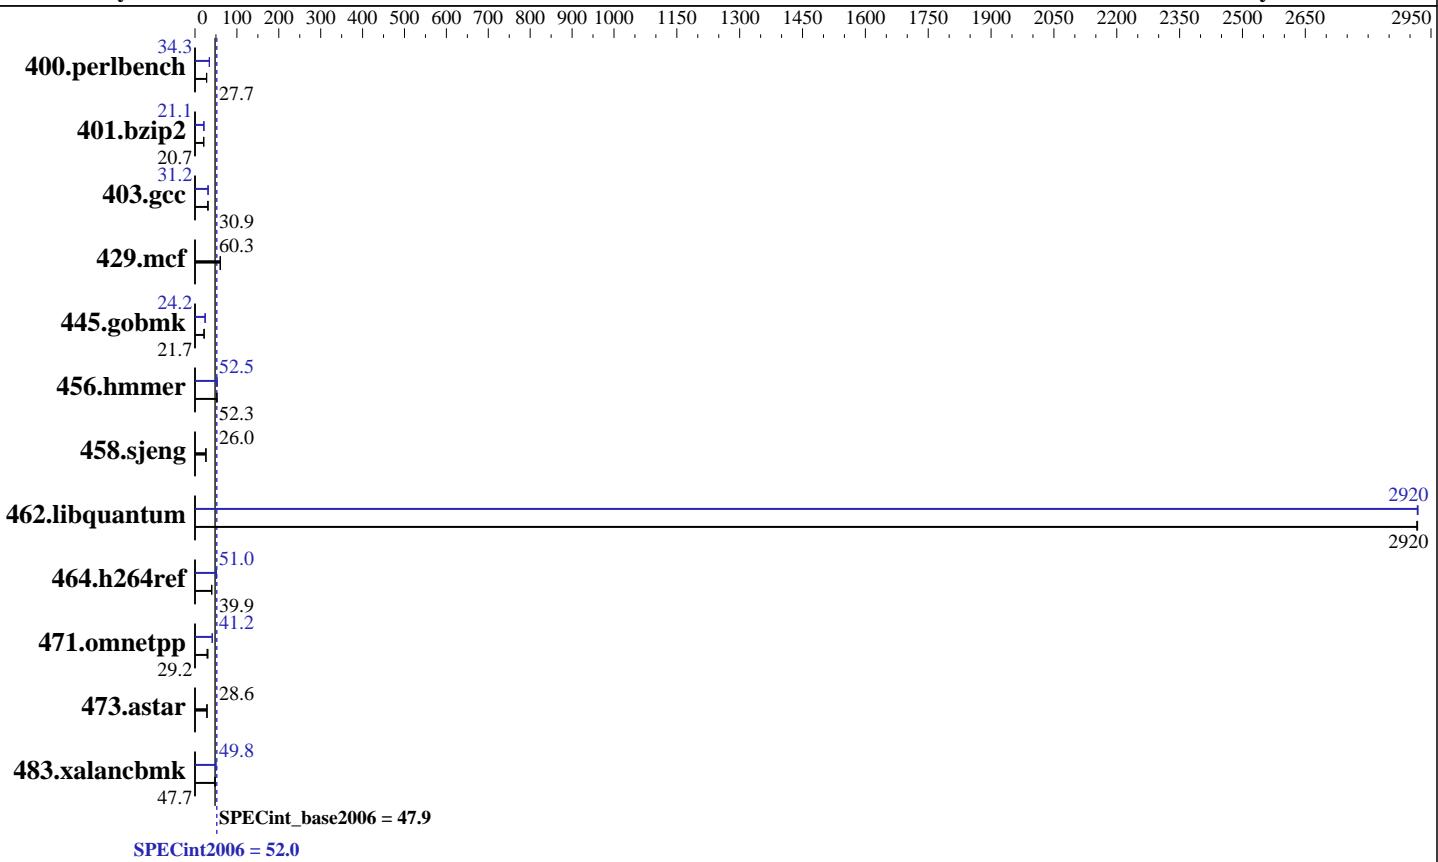

Hardware

CPU Name: Intel Xeon E5-2660 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 Compiler: 2.6.32-431.el6.x86_64
 Auto Parallel: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 52.0

Huawei RH2288H V2 (Intel Xeon E5-2660 V2)

SPECint_base2006 = 47.9

CPU2006 license: 3175

Test date: Apr-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	353	27.7	352	27.8	353	27.6	285	34.3	284	34.4	285	34.3
401.bzip2	464	20.8	465	20.7	465	20.7	456	21.1	456	21.2	456	21.1
403.gcc	260	31.0	261	30.8	260	30.9	258	31.2	258	31.2	258	31.2
429.mcf	151	60.3	151	60.2	151	60.5	151	60.3	151	60.2	151	60.5
445.gobmk	483	21.7	484	21.7	484	21.7	433	24.2	433	24.2	433	24.2
456.hammer	179	52.1	178	52.3	178	52.3	177	52.7	178	52.3	178	52.5
458.sjeng	465	26.0	465	26.0	465	26.0	465	26.0	465	26.0	465	26.0
462.libquantum	7.10	2920	7.10	2920	7.10	2920	7.10	2920	7.10	2920	7.10	2920
464.h264ref	557	39.7	555	39.9	554	39.9	434	51.0	434	51.0	434	51.0
471.omnetpp	202	31.0	214	29.2	215	29.1	151	41.3	152	41.2	152	41.1
473.astar	245	28.6	245	28.6	247	28.5	245	28.6	245	28.6	247	28.5
483.xalancbmk	145	47.7	145	47.6	144	47.9	138	49.8	139	49.8	139	49.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

```
Sysinfo program /spec/config/sysinfo.rev6800
$Rev: 6800 $ $Date::: 2011-10-11 #$
running on localhost Mon Apr 28 15:39:53 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2660 v2 @ 2.20GHz
        2 "physical id"s (chips)
        20 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 10
        siblings : 10
        physical 0: cores 0 1 2 3 4 8 9 10 11 12
        physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      264478184 kB
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 52.0

Huawei RH2288H V2 (Intel Xeon E5-2660 V2)

SPECint_base2006 = 47.9

CPU2006 license: 3175

Test date: Apr-2014

Test sponsor: Huawei

Hardware Availability: Sep-2013

Tested by: Huawei

Software Availability: Nov-2013

Platform Notes (Continued)

```
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 28 15:38

SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  272G   88G  170G  34% /

Additional information from dmidecode:
Memory:
 13x Hynix HMT42GR7AFR4C-RD 16 GB 1867 MHz 2 rank
 3x Samsung M393B2G70DB0-CMA 16 GB 1867 MHz 2 rank

(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "20"

Binaries compiled on a system with 2x Xeon X5645 CPU + 16GB memory
using RHEL 6.1

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enable
The Huawei RH2288H v2 and Huawei RH2288 v2 and
the Huawei RH1288 v2 models are electronically equivalent.
The results have been measured on a Huawei RH2288H v2 model

Base Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288H V2 (Intel Xeon E5-2660 V2)

SPECint2006 = 52.0

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Apr-2014
Hardware Availability: Sep-2013
Software Availability: Nov-2013

Base Compiler Invocation (Continued)

C++ benchmarks:
`icpc -m64`

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/smartheap -lsmartheap64`

Base Other Flags

C benchmarks:
`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288H V2 (Intel Xeon E5-2660 V2)

SPECint2006 = 52.0

CPU2006 license: 3175 **Test date:** Apr-2014
Test sponsor: Huawei **Hardware Availability:** Sep-2013
Tested by: Huawei **Software Availability:** Nov-2013

Peak Compiler Invocation (Continued)

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias

401.bzip2: -xSSE4_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4_2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

456.hmmer: -xSSE4_2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
-ansi-alias

458.sjeng: basepeak = yes

462.libquantum: -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch
-auto-p32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288H V2 (Intel Xeon E5-2660 V2)

SPECint2006 = 52.0

SPECint_base2006 = 47.9

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 22:49:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 June 2014.