



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]_rate2006 = 497

Huawei RH2285 V2 (Intel Xeon E5-2470 v2)

SPECfp_rate_base2006 = 484

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

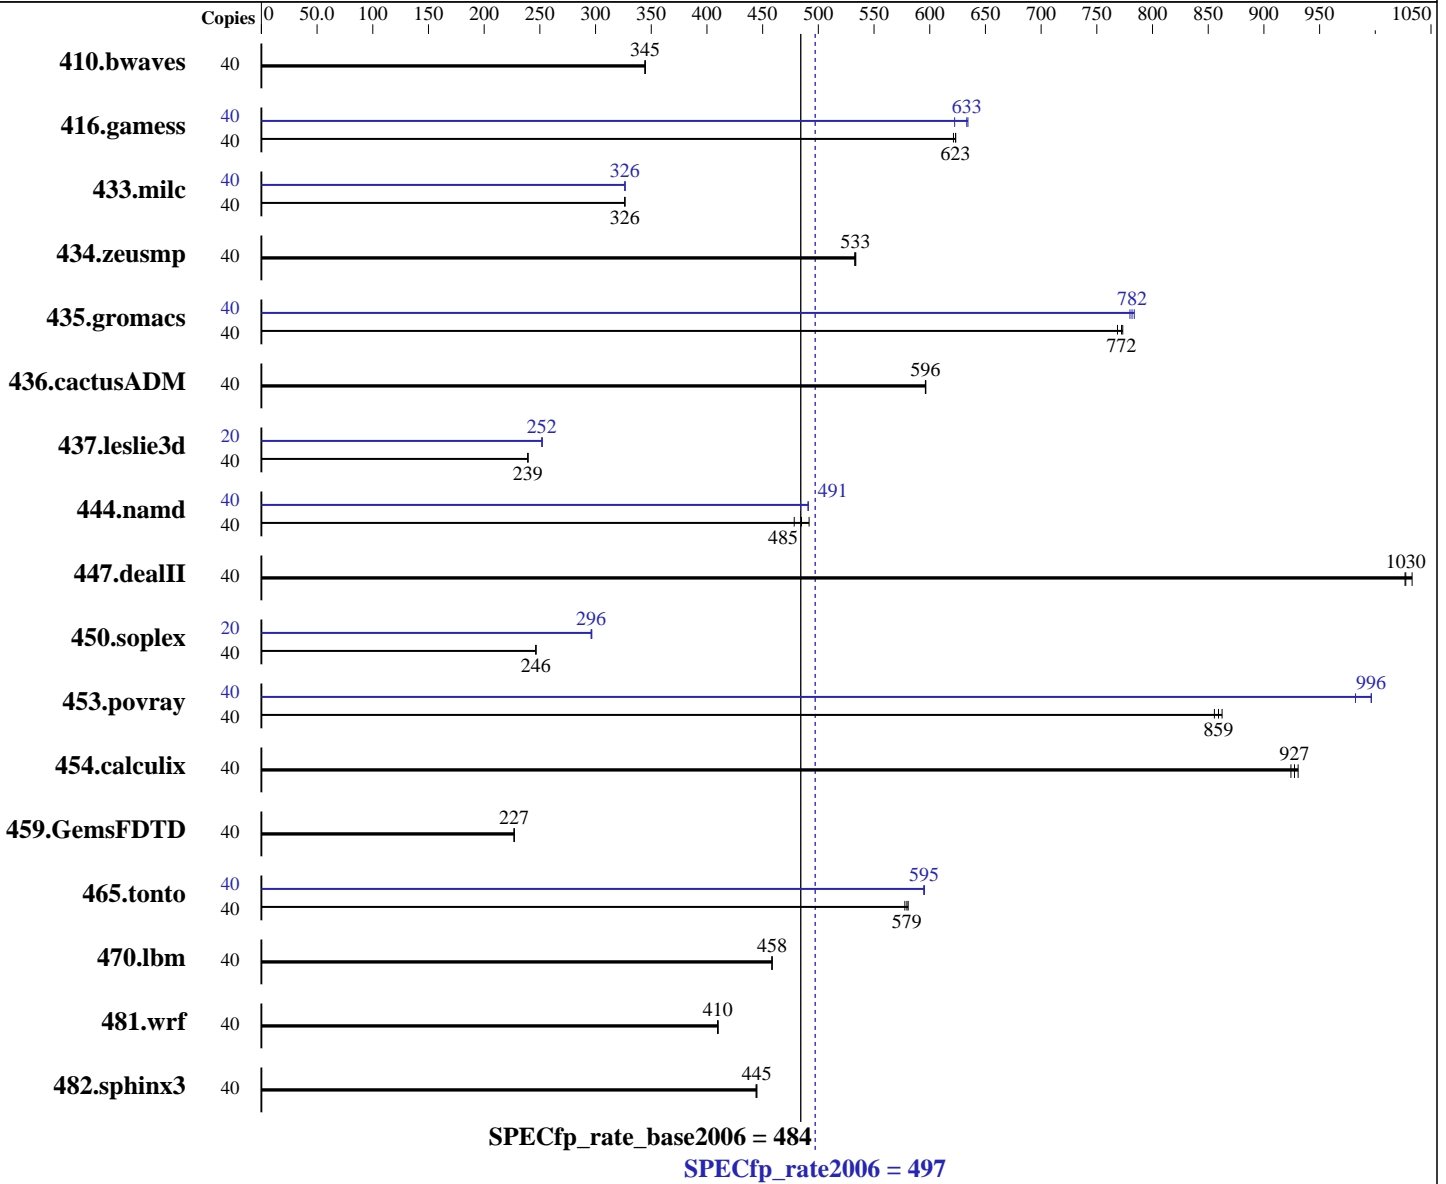

Hardware

CPU Name: Intel Xeon E5-2470 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.14.1.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 497

Huawei RH2285 V2 (Intel Xeon E5-2470 v2)

SPECfp_rate_base2006 = 484

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 192 GB (12 x 16 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	1577	345	1579	344	1578	345	40	1577	345	1579	344	1578	345
416.gamess	40	1257	623	1257	623	1261	621	40	1235	634	1237	633	1258	622
433.milc	40	1125	326	1125	326	1126	326	40	1125	326	1125	326	1125	326
434.zeusmp	40	683	533	682	534	683	533	40	683	533	682	534	683	533
435.gromacs	40	372	769	369	773	370	772	40	365	782	364	784	366	780
436.cactusADM	40	801	597	802	596	802	596	40	801	597	802	596	802	596
437.leslie3d	40	1571	239	1571	239	1572	239	20	746	252	747	252	746	252
444.namd	40	671	478	652	492	662	485	40	663	484	653	491	654	491
447.dealII	40	443	1030	445	1030	446	1030	40	443	1030	445	1030	446	1030
450.soplex	40	1354	246	1354	246	1353	246	20	563	296	563	296	562	297
453.povray	40	248	859	249	856	247	862	40	214	996	217	982	214	996
454.calculix	40	355	931	357	924	356	927	40	355	931	357	924	356	927
459.GemsFDTD	40	1870	227	1870	227	1870	227	40	1870	227	1870	227	1870	227
465.tonto	40	681	578	679	579	678	581	40	661	595	662	595	662	595
470.lbm	40	1199	459	1199	458	1199	458	40	1199	459	1199	458	1199	458
481.wrf	40	1090	410	1090	410	1091	409	40	1090	410	1090	410	1091	409
482.sphinx3	40	1753	445	1753	445	1756	444	40	1753	445	1753	445	1756	444

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1> /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
 Select only test related files when installing the operating system



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 497

Huawei RH2285 V2 (Intel Xeon E5-2470 v2)

SPECfp_rate_base2006 = 484

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on RH2285V2 Wed Jan 1 07:17:27 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2470 v2 @ 2.40GHz

2 "physical id"s (chips)

40 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

siblings : 20

physical 0: cores 0 1 2 3 4 8 9 10 11 12

physical 1: cores 0 1 2 3 4 8 9 10 11 12

cache size : 25600 KB

From /proc/meminfo

MemTotal: 198357116 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:

Linux RH2285V2 2.6.32-358.14.1.el6.x86_64 #1 SMP Tue Jul 16 23:51:20 UTC 2013

x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 31 18:19

SPEC is set to: /spec

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdal	ext4	394G	80G	295G	22%	/

Additional information from dmidecode:

BIOS Insyde Corp. RMIBV602 12/30/2013

Memory:

1x Hynix HMT42GR7AFR4C-PB 16 GB 1600 MHz 2 rank

11x Hynix HMT42GR7MFR4C-PB 16 GB 1600 MHz 2 rank

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 497

Huawei RH2285 V2 (Intel Xeon E5-2470 v2)

SPECfp_rate_base2006 = 484

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
The Huawei RH2285H v2 and Huawei RH2285 v2 models are electronically equivalent.
The results have been measured on a Huawei RH2285H v2 model.

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 497

Huawei RH2285 V2 (Intel Xeon E5-2470 v2)

SPECfp_rate_base2006 = 484

CPU2006 license: 3175

Test date: Jan-2014

Test sponsor: Huawei

Hardware Availability: Jan-2014

Tested by: Huawei

Software Availability: Sep-2013

Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 497

Huawei RH2285 V2 (Intel Xeon E5-2470 v2)

SPECfp_rate_base2006 = 484

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Peak Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 497

Huawei RH2285 V2 (Intel Xeon E5-2470 v2)

SPECfp_rate_base2006 = 484

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revG.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revG.20131009.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Sep 2 13:39:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 September 2014.