



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

### SPECfp<sup>®</sup>\_rate2006 = 823

Lenovo NeXtScale nx360 M5  
(Intel Xeon E5-2695 v3, 2.30 GHz)

### SPECfp\_rate\_base2006 = 798

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Jul-2015

Hardware Availability: Nov-2014

Software Availability: Sep-2014

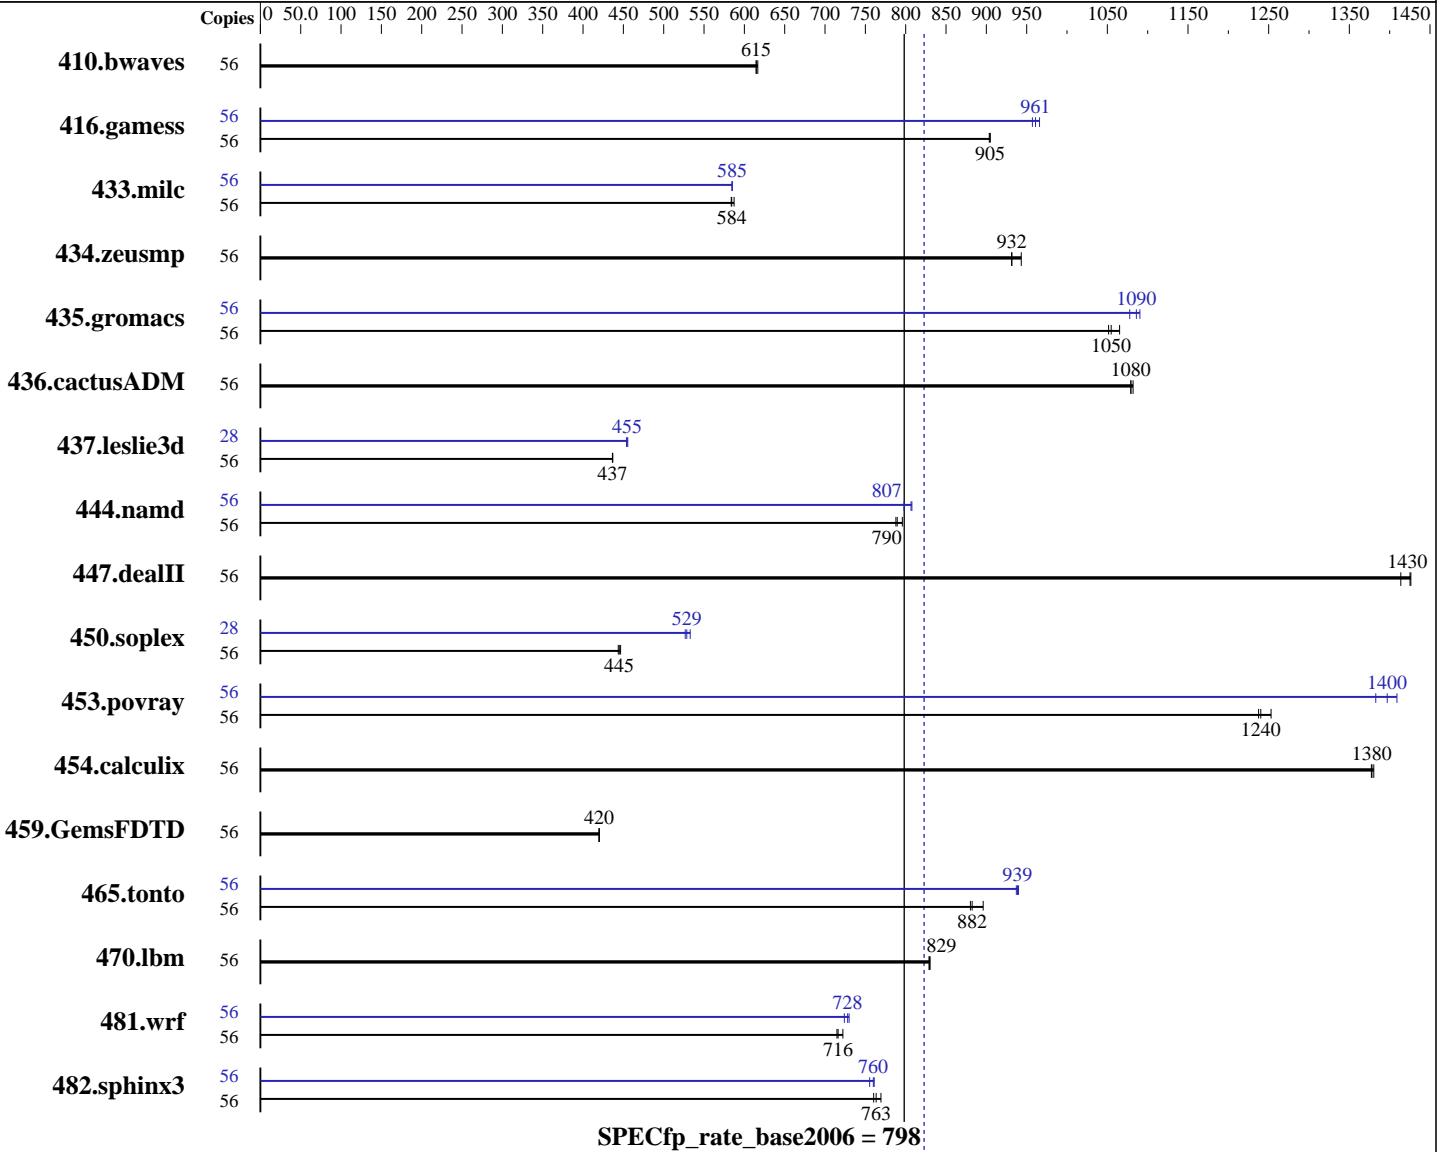

### Hardware

CPU Name: Intel Xeon E5-2695 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = **823**

Lenovo NeXtScale nx360 M5  
(Intel Xeon E5-2695 v3, 2.30 GHz)

SPECfp\_rate\_base2006 = **798**

CPU2006 license: 9017

Test date: Jul-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

L3 Cache: 35 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 1000 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56	1238	615	<b><u>1238</u></b>	<b><u>615</u></b>	1234	617	56	1238	615	<b><u>1238</u></b>	<b><u>615</u></b>	1234	617
416.gamess	56	<b><u>1212</u></b>	<b><u>905</u></b>	1213	904	1212	905	56	1146	957	1135	966	<b><u>1141</u></b>	<b><u>961</u></b>
433.milc	56	<b><u>880</u></b>	<b><u>584</u></b>	881	584	875	587	56	879	585	879	585	<b><u>879</u></b>	<b><u>585</u></b>
434.zeusmp	56	547	931	<b><u>547</u></b>	<b><u>932</u></b>	540	943	56	547	931	<b><u>547</u></b>	<b><u>932</u></b>	540	943
435.gromacs	56	<b><u>379</u></b>	<b><u>1050</u></b>	380	1050	375	1070	56	367	1090	371	1080	<b><u>368</u></b>	<b><u>1090</u></b>
436.cactusADM	56	619	1080	<b><u>620</u></b>	<b><u>1080</u></b>	620	1080	56	619	1080	<b><u>620</u></b>	<b><u>1080</u></b>	620	1080
437.leslie3d	56	<b><u>1205</u></b>	<b><u>437</u></b>	1206	436	1205	437	28	<b><u>579</u></b>	<b><u>455</u></b>	580	454	578	455
444.namd	56	564	796	<b><u>569</u></b>	<b><u>790</u></b>	570	788	56	<b><u>557</u></b>	<b><u>807</u></b>	563	798	556	808
447.dealII	56	<b><u>450</u></b>	<b><u>1430</u></b>	449	1430	453	1410	56	<b><u>450</u></b>	<b><u>1430</u></b>	449	1430	453	1410
450.soplex	56	1046	447	<b><u>1050</u></b>	<b><u>445</u></b>	1053	444	28	438	533	<b><u>442</u></b>	<b><u>529</u></b>	443	527
453.povray	56	241	1240	<b><u>240</u></b>	<b><u>1240</u></b>	238	1250	56	215	1380	211	1410	<b><u>213</u></b>	<b><u>1400</u></b>
454.calculix	56	335	1380	<b><u>335</u></b>	<b><u>1380</u></b>	335	1380	56	335	1380	<b><u>335</u></b>	<b><u>1380</u></b>	335	1380
459.GemsFDTD	56	1416	420	1414	420	<b><u>1414</u></b>	<b><u>420</u></b>	56	1416	420	1414	420	<b><u>1414</u></b>	<b><u>420</u></b>
465.tonto	56	<b><u>624</u></b>	<b><u>882</u></b>	626	880	615	896	56	586	940	588	937	<b><u>587</u></b>	<b><u>939</u></b>
470.lbm	56	928	829	927	830	<b><u>928</u></b>	<b><u>829</u></b>	56	928	829	927	830	<b><u>928</u></b>	<b><u>829</u></b>
481.wrf	56	<b><u>873</u></b>	<b><u>716</u></b>	866	722	875	715	56	<b><u>859</u></b>	<b><u>728</u></b>	864	724	857	730
482.sphinx3	56	1419	769	<b><u>1430</u></b>	<b><u>763</u></b>	1436	760	56	<b><u>1436</u></b>	<b><u>760</u></b>	1434	761	1445	755

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS setting:  
Operating Mode set to "Efficiency-Favor Performance"  
Sysinfo program /home/SPEC/config/sysinfo.rev6914

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 823

Lenovo NeXtScale nx360 M5  
(Intel Xeon E5-2695 v3, 2.30 GHz)

SPECfp\_rate\_base2006 = 798

CPU2006 license: 9017

Test date: Jul-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

### Platform Notes (Continued)

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on wilykat-2.labs.lenovo.com Wed Jul 22 17:45:59 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2695 v3 @ 2.30GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 7
siblings : 14
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 17920 KB
```

```
From /proc/meminfo
MemTotal: 263582684 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux wilykat-2.labs.lenovo.com 3.10.0-123.el7.x86_64 #1 SMP Mon May 5
11:16:57 EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 22 05:35
```

```
SPEC is set to: /home/SPEC
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs 927G 94G 833G 11% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

**SPECfp\_rate2006 = 823**

Lenovo NeXtScale nx360 M5  
(Intel Xeon E5-2695 v3, 2.30 GHz)

**SPECfp\_rate\_base2006 = 798**

**CPU2006 license:** 9017

**Test date:** Jul-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Nov-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2014

### Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[THE106CUS-1.11]- 02/16/2015

Memory:

10x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz

6x Hynix HMA42GR7MFR4N-TFT1 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/SPEC/libs/32:/home/SPEC/libs/64:/home/SPEC/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

### Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECfp\_rate2006 = 823**

Lenovo NeXtScale nx360 M5  
(Intel Xeon E5-2695 v3, 2.30 GHz)

**SPECfp\_rate\_base2006 = 798**

**CPU2006 license:** 9017

**Test date:** Jul-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Nov-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2014

## Base Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deall: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 823

Lenovo NeXtScale nx360 M5  
(Intel Xeon E5-2695 v3, 2.30 GHz)

SPECfp\_rate\_base2006 = 798

CPU2006 license: 9017

Test date: Jul-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -prof-gen(pass 1) -ipo -O3 -no-prec-div
            -prof-use(pass 2) -unroll2

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
         -ansi-alias

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

**SPECfp\_rate2006 = 823**

Lenovo NeXtScale nx360 M5  
(Intel Xeon E5-2695 v3, 2.30 GHz)

**SPECfp\_rate\_base2006 = 798**

**CPU2006 license:** 9017

**Test date:** Jul-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Nov-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-B.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Aug 12 11:07:41 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 August 2015.