



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9

(2.00 GHz, Intel Xeon E5-2660 v4)

SPECfp[®]_rate2006 = 895

SPECfp_rate_base2006 = 871

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Nov-2016

Hardware Availability: Dec-2016

Software Availability: Sep-2016

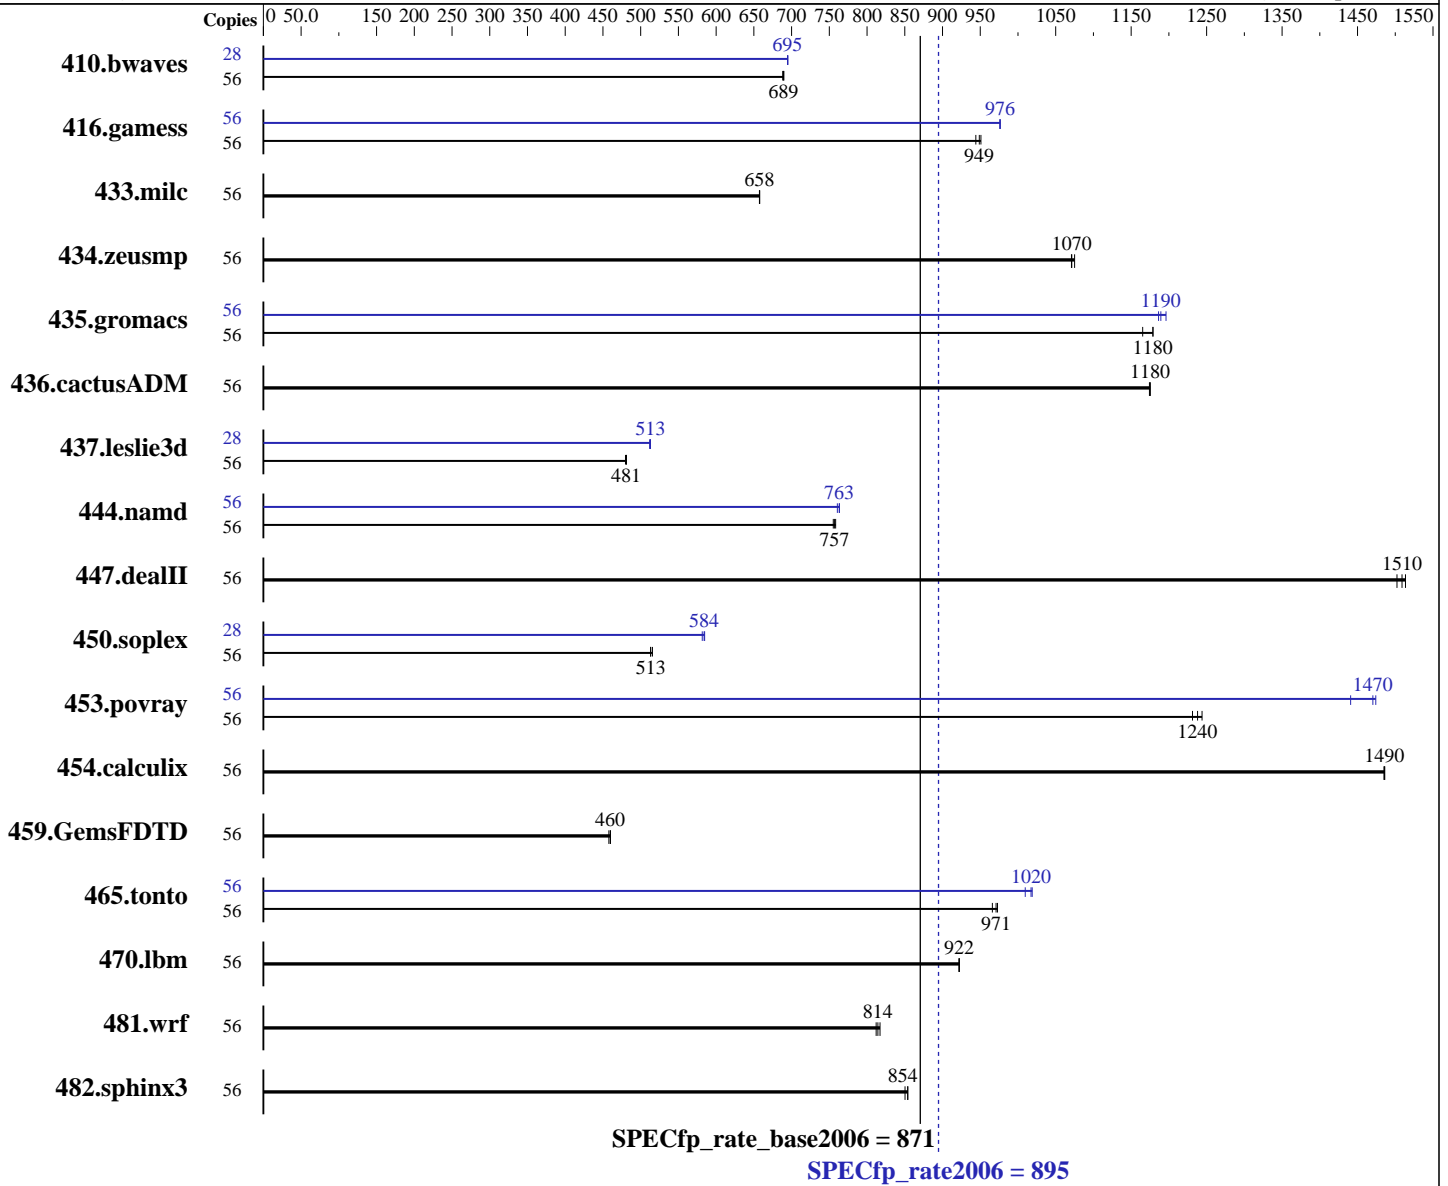

Hardware

CPU Name: Intel Xeon E5-2660 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP1
 Kernel 3.12.49-11-default
 Compiler: C/C++: Version 17.0.0.098 of Intel C++ Studio XE for Linux;
 Fortran: Version 17.0.0.098 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9

(2.00 GHz, Intel Xeon E5-2660 v4)

SPECfp_rate2006 = 895

SPECfp_rate_base2006 = 871

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2016

Hardware Availability: Dec-2016

Software Availability: Sep-2016

L3 Cache: 35 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 600 GB 10 K SAS, RAID 0
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56	1106	688	1104	689	1103	690	28	548	695	547	695	548	695
416.gamess	56	1156	949	1153	951	1161	944	56	1123	976	1123	976	1123	976
433.milc	56	782	657	782	658	782	658	56	782	657	782	658	782	658
434.zeusmp	56	476	1070	476	1070	474	1080	56	476	1070	476	1070	474	1080
435.gromacs	56	339	1180	339	1180	343	1170	56	337	1190	336	1190	334	1200
436.cactusADM	56	569	1180	569	1180	570	1170	56	569	1180	569	1180	570	1170
437.leslie3d	56	1097	480	1094	481	1094	481	28	513	513	514	512	513	513
444.namd	56	595	755	592	758	593	757	56	589	763	588	763	590	761
447.dealII	56	423	1510	426	1500	425	1510	56	423	1510	426	1500	425	1510
450.soplex	56	910	513	910	513	906	516	28	401	582	400	584	399	585
453.povray	56	239	1240	242	1230	241	1240	56	202	1470	207	1440	203	1470
454.calculix	56	311	1490	311	1490	311	1490	56	311	1490	311	1490	311	1490
459.GemsFDTD	56	1292	460	1292	460	1298	458	56	1292	460	1292	460	1298	458
465.tonto	56	568	971	570	966	566	973	56	546	1010	542	1020	541	1020
470.lbm	56	834	922	834	922	835	922	56	834	922	834	922	835	922
481.wrf	56	765	817	770	812	768	814	56	765	817	770	812	768	814
482.sphinx3	56	1284	850	1278	854	1278	854	56	1284	850	1278	854	1278	854

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9

(2.00 GHz, Intel Xeon E5-2660 v4)

SPECfp_rate2006 = 895

SPECfp_rate_base2006 = 871

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2016

Hardware Availability: Dec-2016

Software Availability: Sep-2016

Platform Notes

BIOS Configuration:

```

Power Profile set to Custom
Power Regulator to Static High Performance Mode
Minimum Processor Idle Power Core C-State set to C6 State
Minimum Processor Idle Power Package C-State set to No Package State
Energy/Performance Bias set to Maximum Performance
Collaborative Power Control set to Disabled
QPI Snoop Configuration set to Cluster on Die
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh

```

```

Sysinfo program /home/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-hiyk Wed Nov  2 03:31:00 2016

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) CPU E5-2660 v4 @ 2.00GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores     : 14
  siblings      : 28
  physical 0:   cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 1:   cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size     : 17920 KB

```

From /proc/meminfo

```

MemTotal:      264544164 kB
HugePages_Total: 0
Hugepagesize:   2048 kB

```

/usr/bin/lsb_release -d

```
SUSE Linux Enterprise Server 12 SP1
```

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9
(2.00 GHz, Intel Xeon E5-2660 v4)

SPECfp_rate2006 = 895

SPECfp_rate_base2006 = 871

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2016

Hardware Availability: Dec-2016

Software Availability: Sep-2016

Platform Notes (Continued)

```
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-hiyk 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 1 15:29
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   331G  52G  279G  16% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS HP I37 09/14/2016
```

```
Memory:
```

```
8x UNKNOWN NOT AVAILABLE
```

```
16x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have one line reading as:
16x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9

(2.00 GHz, Intel Xeon E5-2660 v4)

SPECfp_rate2006 = 895

SPECfp_rate_base2006 = 871

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2016

Hardware Availability: Dec-2016

Software Availability: Sep-2016

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9

(2.00 GHz, Intel Xeon E5-2660 v4)

SPECfp_rate2006 = 895

SPECfp_rate_base2006 = 871

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2016

Hardware Availability: Dec-2016

Software Availability: Sep-2016

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -D_FILE_OFFSET_BITS=64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 6



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9
(2.00 GHz, Intel Xeon E5-2660 v4)

SPECfp_rate2006 = 895

SPECfp_rate_base2006 = 871

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2016

Hardware Availability: Dec-2016

Software Availability: Sep-2016

Peak Optimization Flags (Continued)

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-malloc-options=3
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen9

(2.00 GHz, Intel Xeon E5-2660 v4)

SPECfp_rate2006 = 895

SPECfp_rate_base2006 = 871

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2016

Hardware Availability: Dec-2016

Software Availability: Sep-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revD.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revD.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Nov 29 19:08:00 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 November 2016.