



SPEC[®] CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp[®]_rate2006 = 875

Inspur NF5280M4 (Intel Xeon E5-2660 v4)

SPECfp_rate_base2006 = 845

CPU2006 license: 3358


Test date: Apr-2017

Test sponsor: Inspur Corporation

Hardware Availability: Mar-2016

Tested by: Inspur Corporation

Software Availability: Nov-2016

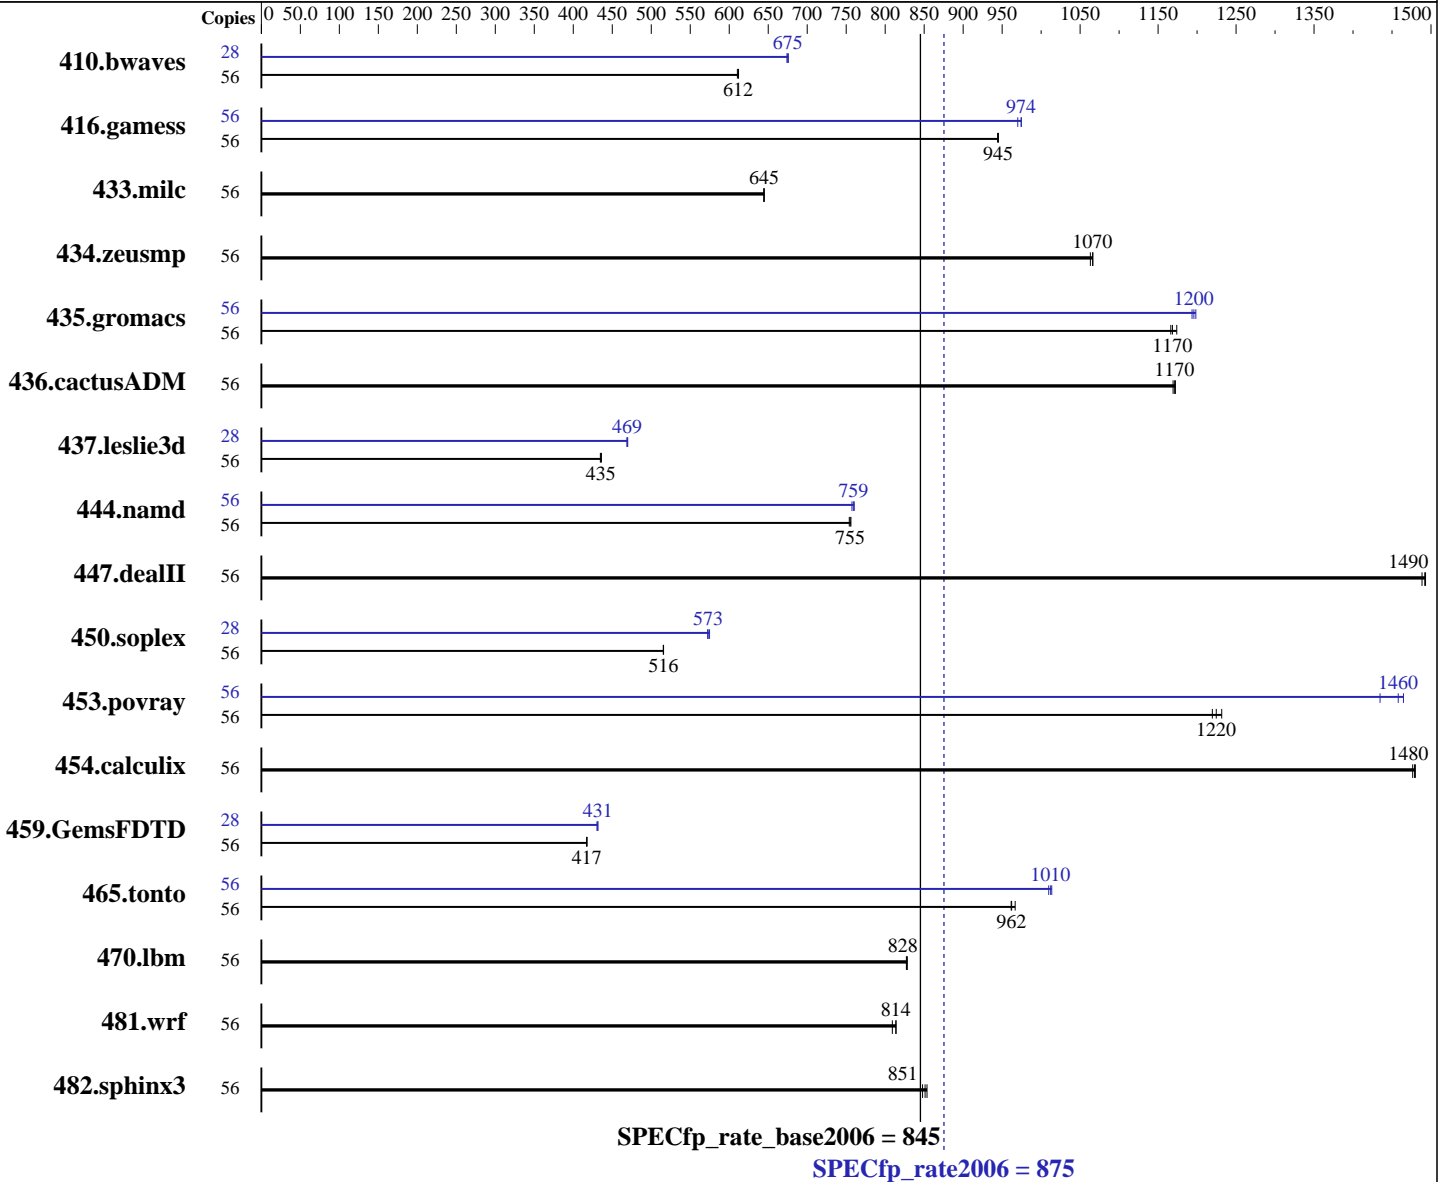

Hardware

CPU Name: Intel Xeon E5-2660 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 3.10.0-514.el7.x86_64
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = **875**

Inspur NF5280M4 (Intel Xeon E5-2660 v4)

SPECfp_rate_base2006 = **845**

CPU2006 license: 3358

Test date: Apr-2017

Test sponsor: Inspur Corporation

Hardware Availability: Mar-2016

Tested by: Inspur Corporation

Software Availability: Nov-2016

L3 Cache: 35 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 450 GB SATA SSD
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56	1244	612	1247	610	<u>1244</u>	<u>612</u>	28	565	674	<u>564</u>	<u>675</u>	563	676
416.gamess	56	<u>1160</u>	<u>945</u>	1161	944	1160	945	56	<u>1125</u>	<u>974</u>	1130	970	1125	975
433.milc	56	798	644	797	645	<u>798</u>	<u>645</u>	56	798	644	797	645	<u>798</u>	<u>645</u>
434.zeusmp	56	478	1070	<u>478</u>	<u>1070</u>	479	1060	56	478	1070	<u>478</u>	<u>1070</u>	479	1060
435.gromacs	56	<u>342</u>	<u>1170</u>	341	1170	343	1170	56	<u>334</u>	<u>1200</u>	335	1190	334	1200
436.cactusADM	56	572	1170	<u>571</u>	<u>1170</u>	571	1170	56	572	1170	<u>571</u>	<u>1170</u>	571	1170
437.leslie3d	56	1211	435	<u>1209</u>	<u>435</u>	1207	436	28	<u>561</u>	<u>469</u>	561	469	560	470
444.namd	56	596	754	594	756	<u>595</u>	<u>755</u>	56	<u>592</u>	<u>759</u>	593	757	591	760
447.dealII	56	<u>429</u>	<u>1490</u>	430	1490	429	1490	56	<u>429</u>	<u>1490</u>	430	1490	429	1490
450.soplex	56	<u>906</u>	<u>516</u>	905	516	906	515	28	406	575	408	572	<u>408</u>	<u>573</u>
453.povray	56	244	1220	<u>243</u>	<u>1220</u>	242	1230	56	<u>204</u>	<u>1460</u>	208	1430	203	1460
454.calculix	56	313	1480	<u>312</u>	<u>1480</u>	312	1480	56	313	1480	<u>312</u>	<u>1480</u>	312	1480
459.GemsFDTD	56	1423	417	1424	417	<u>1423</u>	<u>417</u>	28	<u>689</u>	<u>431</u>	690	430	688	431
465.tonto	56	570	967	573	962	<u>573</u>	<u>962</u>	56	544	1010	<u>544</u>	<u>1010</u>	546	1010
470.lbm	56	929	828	<u>930</u>	<u>828</u>	930	827	56	929	828	<u>930</u>	<u>828</u>	930	827
481.wrf	56	<u>769</u>	<u>814</u>	773	809	768	814	56	<u>769</u>	<u>814</u>	773	809	768	814
482.sphinx3	56	1279	854	1287	848	<u>1282</u>	<u>851</u>	56	1279	854	1287	848	<u>1282</u>	<u>851</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS and OS configuration:
SCALING_GOVERNOR set to Performance
Hardware Prefetch set to Disable

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 875

Inspur NF5280M4 (Intel Xeon E5-2660 v4)

SPECfp_rate_base2006 = 845

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Apr-2017

Hardware Availability: Mar-2016

Software Availability: Nov-2016

Platform Notes (Continued)

```

VT Support set to Disable
ClE Support set to Disable
Sysinfo program /home/CPU2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on localhost.localdomain Sat Apr 29 00:22:57 2017

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2660 v4 @ 2.00GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores    : 14
  siblings     : 28
  physical 0   : cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 1   : cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size     : 17920 KB

```

```

From /proc/meminfo
MemTotal:      263847500 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

```

```

uname -a:
Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13
EDT 2016 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Apr 28 11:12

```

SPEC is set to: /home/CPU2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  392G  55G  338G  14% /home

```

Additional information from dmidecode:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 875

Inspur NF5280M4 (Intel Xeon E5-2660 v4)

SPECfp_rate_base2006 = 845

CPU2006 license: 3358

Test date: Apr-2017

Test sponsor: Inspur Corporation

Hardware Availability: Mar-2016

Tested by: Inspur Corporation

Software Availability: Nov-2016

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 4.1.11 08/11/2016

Memory:

8x NO DIMM NO DIMM

16x Samsung M393A2G40EB1-CRC 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/CPU2006/libs/32:/home/CPU2006/libs/64:/home/CPU2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 875

Inspur NF5280M4 (Intel Xeon E5-2660 v4)

SPECfp_rate_base2006 = 845

CPU2006 license: 3358

Test date: Apr-2017

Test sponsor: Inspur Corporation

Hardware Availability: Mar-2016

Tested by: Inspur Corporation

Software Availability: Nov-2016

Base Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 875

Inspur NF5280M4 (Intel Xeon E5-2660 v4)

SPECfp_rate_base2006 = 845

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Apr-2017

Hardware Availability: Mar-2016

Software Availability: Nov-2016

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
         -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -fno-alias -auto-ilp32
         -qopt-mem-layout-trans=3

```

447.dealII: basepeak = yes

```

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -qopt-malloc-options=3
           -qopt-mem-layout-trans=3

```

```

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Inspur Corporation

SPECfp_rate2006 = 875

Inspur NF5280M4 (Intel Xeon E5-2660 v4)

SPECfp_rate_base2006 = 845

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Apr-2017

Hardware Availability: Mar-2016

Software Availability: Nov-2016

Peak Optimization Flags (Continued)

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 30 15:31:21 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 30 May 2017.