



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## NEC Corporation

SPECint®\_rate2006 = 3020

Express5800/A2040d (Intel Xeon E7-8867 v4)

SPECint\_rate\_base2006 = 2900

CPU2006 license: 9006


Test date: May-2017

Test sponsor: NEC Corporation

Hardware Availability: Sep-2016

Tested by: NEC Corporation

Software Availability: Nov-2016

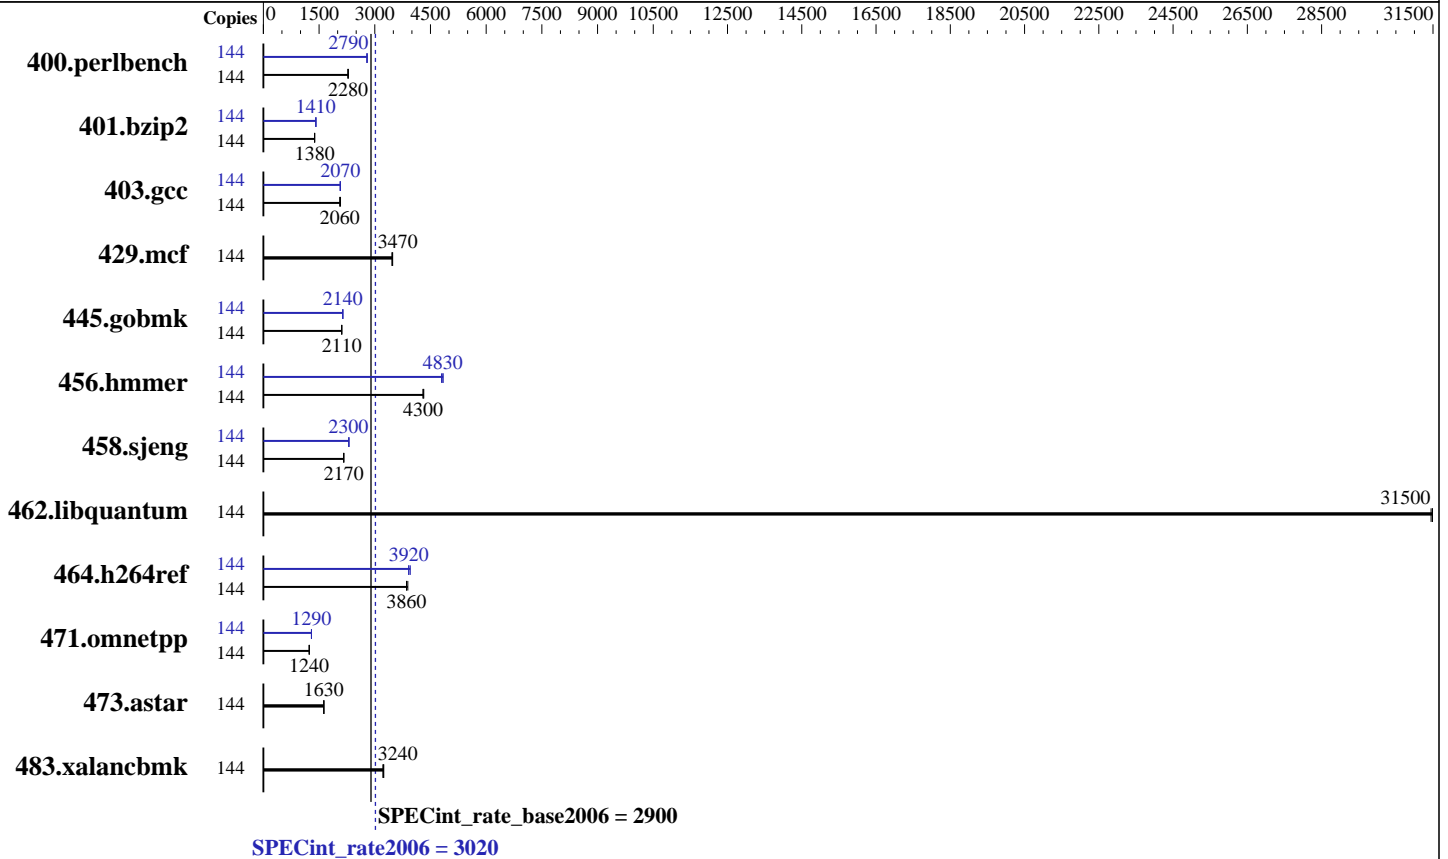

### Hardware

CPU Name: Intel Xeon E7-8867 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,3,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 45 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 1 TB (32 x 32 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)  
 Disk Subsystem: 1 x 600 GB SAS, 15000 RPM, RAID 0  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)  
 Kernel 3.10.0-514.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## NEC Corporation

SPECint\_rate2006 = 3020

Express5800/A2040d (Intel Xeon E7-8867 v4)

SPECint\_rate\_base2006 = 2900

CPU2006 license: 9006

Test date: May-2017

Test sponsor: NEC Corporation

Hardware Availability: Sep-2016

Tested by: NEC Corporation

Software Availability: Nov-2016

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	144	615	2290	618	2280	<u>617</u>	<u>2280</u>	144	503	2800	<u>504</u>	<u>2790</u>	505	2790
401.bzip2	144	1009	1380	1005	1380	<u>1006</u>	<u>1380</u>	144	981	1420	984	1410	<u>983</u>	<u>1410</u>
403.gcc	144	558	2080	563	2060	<u>562</u>	<u>2060</u>	144	<u>559</u>	<u>2070</u>	561	2070	559	2070
429.mcf	144	379	3460	377	3480	<u>378</u>	<u>3470</u>	144	379	3460	377	3480	<u>378</u>	<u>3470</u>
445.gobmk	144	715	2110	<u>716</u>	<u>2110</u>	716	2110	144	706	2140	707	2140	<u>706</u>	<u>2140</u>
456.hammer	144	311	4320	312	4300	<u>312</u>	<u>4300</u>	144	278	4840	<u>278</u>	<u>4830</u>	280	4800
458.sjeng	144	806	2160	<u>804</u>	<u>2170</u>	804	2170	144	758	2300	756	2300	<u>757</u>	<u>2300</u>
462.libquantum	144	94.9	31400	94.8	31500	<u>94.8</u>	<u>31500</u>	144	94.9	31400	94.8	31500	<u>94.8</u>	<u>31500</u>
464.h264ref	144	827	3850	<u>826</u>	<u>3860</u>	819	3890	144	805	3960	<u>813</u>	<u>3920</u>	815	3910
471.omnetpp	144	730	1230	<u>728</u>	<u>1240</u>	727	1240	144	694	1300	<u>695</u>	<u>1290</u>	695	1290
473.astar	144	622	1630	<u>621</u>	<u>1630</u>	620	1630	144	622	1630	<u>621</u>	<u>1630</u>	620	1630
483.xalancbmk	144	309	3220	<u>307</u>	<u>3240</u>	307	3240	144	309	3220	<u>307</u>	<u>3240</u>	307	3240

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Memory RAS Mode: Independent mode  
VT-x : Disabled  
Processor C6 Report : Disabled  
OS Performance Tuning : Disabled  
Energy Performance : Performance  
Patrol Scrub : Disabled  
Demand Scrub : Disabled  
Memory P.E. Retry : Disabled  
Cluster On Die : Enabled

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/SPEC/libs/32:/SPEC/libs/64:/SPEC/sh"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECint\_rate2006 = 3020

Express5800/A2040d (Intel Xeon E7-8867 v4)

SPECint\_rate\_base2006 = 2900

CPU2006 license: 9006

Test date: May-2017

Test sponsor: NEC Corporation

Hardware Availability: Sep-2016

Tested by: NEC Corporation

Software Availability: Nov-2016

## General Notes (Continued)

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1  
Transparent Huge Pages enabled by default

Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

## Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECint\_rate2006 = 3020

Express5800/A2040d (Intel Xeon E7-8867 v4)

SPECint\_rate\_base2006 = 2900

CPU2006 license: 9006

Test date: May-2017

Test sponsor: NEC Corporation

Hardware Availability: Sep-2016

Tested by: NEC Corporation

Software Availability: Nov-2016

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

NEC Corporation

SPECint\_rate2006 = 3020

Express5800/A2040d (Intel Xeon E7-8867 v4)

SPECint\_rate\_base2006 = 2900

CPU2006 license: 9006

Test date: May-2017

Test sponsor: NEC Corporation

Hardware Availability: Sep-2016

Tested by: NEC Corporation

Software Availability: Nov-2016

## Peak Optimization Flags (Continued)

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECint\_rate2006 = 3020**

**Express5800/A2040d (Intel Xeon E7-8867 v4)**

**SPECint\_rate\_base2006 = 2900**

**CPU2006 license:** 9006

**Test date:** May-2017

**Test sponsor:** NEC Corporation

**Hardware Availability:** Sep-2016

**Tested by:** NEC Corporation

**Software Availability:** Nov-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-platform-Settings-V1.2-A2040d-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-platform-Settings-V1.2-A2040d-RevB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jun 27 17:13:54 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 June 2017.