



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R940  
(Intel Xeon Gold 6136, 3.00 GHz)

**SPECSspeed2017\_int\_base = 8.85**

**SPECSspeed2017\_int\_peak = 9.11**

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

**Test Date:** Oct-2017

**Hardware Availability:** Sep-2017

**Software Availability:** Sep-2017

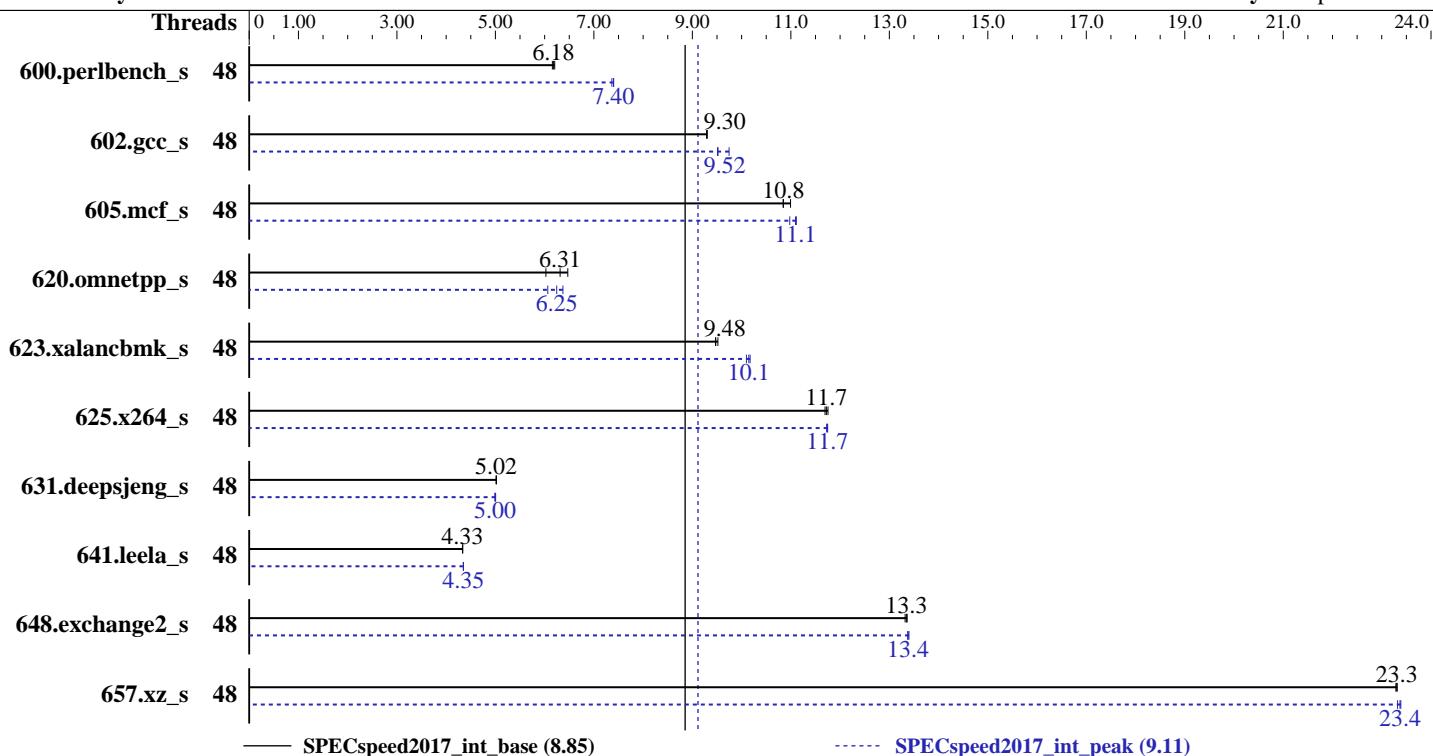

<b>Hardware</b>		<b>Software</b>	
CPU Name:	Intel Xeon Gold 6136	OS:	SUSE Linux Enterprise Server 12 SP2
Max MHz.:	3700		4.4.21-69-default
Nominal:	3000	Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Enabled:	48 cores, 4 chips		Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Orderable:	2,4 chip	Parallel:	Yes
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	Version 1.1.7 released Sep-2017
L2:	1 MB I+D on chip per core	File System:	xfs
L3:	24.75 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)	Peak Pointers:	32/64-bit
Storage:	1 x 900 GB 15K RPM SAS12	Other:	jemalloc: jemalloc memory allocator library V5.0.1; jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets; jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5; jemalloc: sources available from jemalloc.net or releases
Other:	None		



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Gold 6136, 3.00 GHz)

**SPECspeed2017\_int\_base = 8.85**

**SPECspeed2017\_int\_peak = 9.11**

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	48	<b>287</b>	<b>6.18</b>	286	6.20	288	6.16	48	<b>240</b>	<b>7.40</b>	240	7.40	241	7.37		
602.gcc_s	48	428	9.30	<b>428</b>	<b>9.30</b>	429	9.29	48	<b>418</b>	<b>9.52</b>	419	9.51	409	9.75		
605.mcf_s	48	429	11.0	<b>435</b>	<b>10.8</b>	435	10.8	48	425	11.1	430	11.0	<b>425</b>	<b>11.1</b>		
620.omnetpp_s	48	271	6.03	<b>258</b>	<b>6.31</b>	252	6.47	48	256	6.37	269	6.06	<b>261</b>	<b>6.25</b>		
623.xalancbmk_s	48	<b>150</b>	<b>9.48</b>	149	9.52	150	9.47	48	140	10.1	139	10.2	<b>140</b>	<b>10.1</b>		
625.x264_s	48	150	11.8	151	11.7	<b>150</b>	<b>11.7</b>	48	150	11.7	<b>150</b>	<b>11.7</b>	150	11.7		
631.deepsjeng_s	48	<b>286</b>	<b>5.02</b>	286	5.02	286	5.02	48	287	4.99	<b>287</b>	<b>5.00</b>	286	5.00		
641.leela_s	48	394	4.33	<b>394</b>	<b>4.33</b>	393	4.34	48	392	4.35	392	4.35	<b>392</b>	<b>4.35</b>		
648.exchange2_s	48	<b>220</b>	<b>13.3</b>	221	13.3	220	13.4	48	220	13.4	219	13.4	<b>220</b>	<b>13.4</b>		
657.xz_s	48	265	23.3	<b>265</b>	<b>23.3</b>	265	23.3	48	265	23.3	<b>265</b>	<b>23.4</b>	264	23.4		
<b>SPECspeed2017_int_base = 8.85</b>																
<b>SPECspeed2017_int_peak = 9.11</b>																

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"  
OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

## Platform Notes

BIOS settings:

Logical Processor Disabled

Virtualization Technology Disabled

Sub NUMA Cluster Disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C1E Disabled

C States set to Autonomous

Uncore Frequency set to Dynamic

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Gold 6136, 3.00 GHz)

SPECspeed2017\_int\_base = 8.85

SPECspeed2017\_int\_peak = 9.11

CPU2017 License: 55

Test Date: Oct-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Platform Notes (Continued)

```
Memory Patrol Scrub Disabled
Energy Efficiency Policy set to Performance
CPU Interconnect Bus Link Power Management Disabled
PCI ASPM L1 Link Power Management Disabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-r3h9 Sat Oct 21 14:50:08 2017
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6136 CPU @ 3.00GHz
        4 "physical id"s (chips)
        48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
    cpu cores : 12
    siblings   : 12
    physical 0: cores 0 1 2 3 4 9 10 16 18 19 25 26
    physical 1: cores 0 3 4 5 6 7 16 18 19 20 21 22
    physical 2: cores 0 1 2 3 4 9 10 16 18 19 25 26
    physical 3: cores 0 3 4 5 6 7 16 18 19 20 21 22
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               48
On-line CPU(s) list: 0-47
Thread(s) per core:  1
Core(s) per socket:  12
Socket(s):            4
NUMA node(s):         4
Vendor ID:            GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Gold 6136 CPU @ 3.00GHz
Stepping:              4
CPU MHz:              2992.960
BogoMIPS:              5985.92
Virtualization:       VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              25344K
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Gold 6136, 3.00 GHz)

SPECspeed2017\_int\_base = 8.85

SPECspeed2017\_int\_peak = 9.11

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

```
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44
NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xgetbv1 cqm_llc cqm_occup_llc
```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44
node 0 size: 192119 MB
node 0 free: 191560 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45
node 1 size: 193521 MB
node 1 free: 193019 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46
node 2 size: 193521 MB
node 2 free: 192991 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47
node 3 size: 193518 MB
node 3 free: 192862 MB
node distances:
node   0   1   2   3
  0: 10 21 21 21
  1: 21 10 21 21
  2: 21 21 10 21
  3: 21 21 21 10
```

```
From /proc/meminfo
MemTotal:      791225344 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Gold 6136, 3.00 GHz)

SPECspeed2017\_int\_base = 8.85

SPECspeed2017\_int\_peak = 9.11

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 2
    # This file is deprecated and will be removed in a future service pack or release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP2"
    VERSION_ID="12.2"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-r3h9 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 21 14:49

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   796G   17G   779G   3% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS Dell Inc. 1.1.7 08/10/2017
Memory:
13x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666
35x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)
```

## Compiler Version Notes

=====

CC 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base,  
peak) 657.xz\_s(base)

=====

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Gold 6136, 3.00 GHz)

SPECspeed2017\_int\_base = 8.85

SPECspeed2017\_int\_peak = 9.11

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

```
=====
CC 600.perlbench_s(peak) 602.gcc_s(peak) 605.mcf_s(peak) 657.xz_s(peak)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
641.leela_s(base)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 620.omnetpp_s(peak) 623.xalancbmk_s(peak) 631.deepsjeng_s(peak)
641.leela_s(peak)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 648.exchange2_s(base, peak)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Gold 6136, 3.00 GHz)

SPECspeed2017\_int\_base = 8.85

SPECspeed2017\_int\_peak = 9.11

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Gold 6136, 3.00 GHz)

SPECspeed2017\_int\_base = 8.85

SPECspeed2017\_int\_peak = 9.11

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3  
-no-prec-div -DSPEC\_SUPPRESS\_OPENMP -qopenmp  
-DSPEC\_OPENMP -fno-strict-overflow  
-L/usr/local/je5.0.1-64/lib -ljemalloc

602.gcc\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3  
-no-prec-div -DSPEC\_SUPPRESS\_OPENMP -qopenmp  
-DSPEC\_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc

605.mcf\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Gold 6136, 3.00 GHz)

SPECspeed2017\_int\_base = 8.85

SPECspeed2017\_int\_peak = 9.11

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

625.x264\_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

657.xz\_s: Same as 602.gcc\_s

C++ benchmarks:

620.omnetpp\_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

623.xalancbmk\_s: -L/opt/intel/compilers\_and\_libraries\_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC\_SUPPRESS\_OPENMP -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-32/lib -ljemalloc

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: Same as 620.omnetpp\_s

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks (except as noted below):

-m64

623.xalancbmk\_s: -m32

Fortran benchmarks:

-m64



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940  
(Intel Xeon Gold 6136, 3.00 GHz)

SPECspeed2017\_int\_base = 8.85

SPECspeed2017\_int\_peak = 9.11

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-10-21 17:50:08-0400.

Report generated on 2018-10-31 15:44:56 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-21.