



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017\_int\_base = 6.97

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

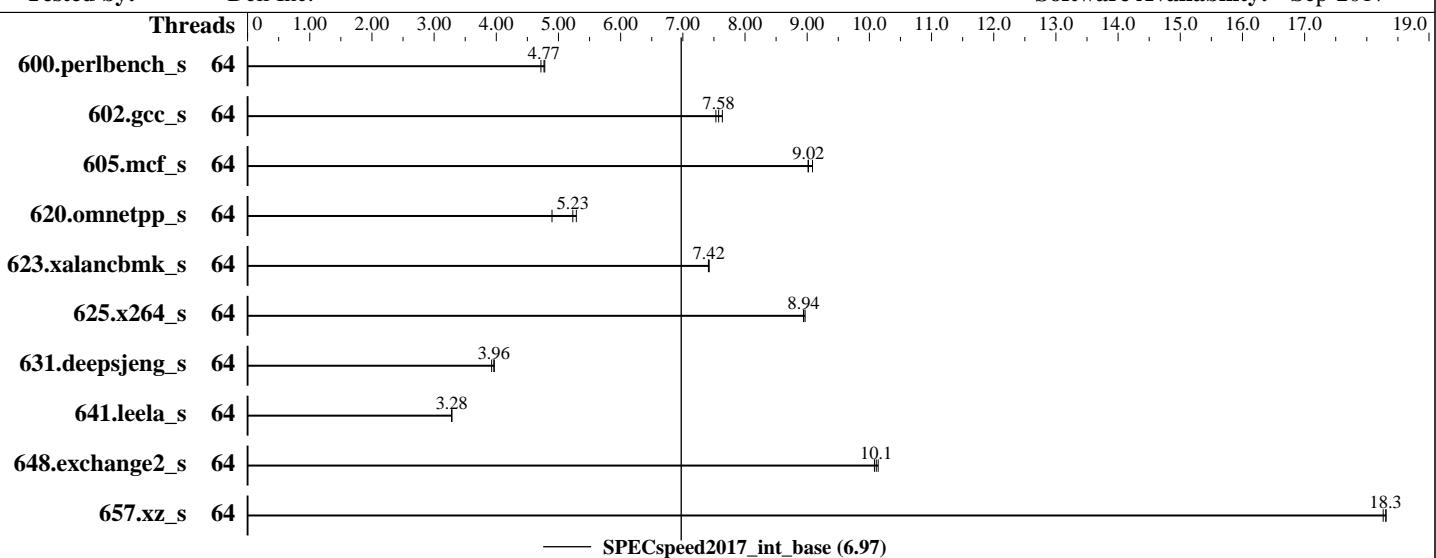

## Hardware

CPU Name: Intel Xeon Platinum 8153  
Max MHz.: 2800  
Nominal: 2000  
Enabled: 32 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 22 MB I+D on chip per chip  
Other: None  
Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R)  
Storage: 1 x 960 GB SATA SSD  
Other: None

## Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86\_64)  
4.4.70-2-default  
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran  
Compiler for Linux  
Parallel: Yes  
Firmware: Version 1.0.0 released Aug-2017  
File System: btrfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc: jemalloc memory allocator library  
V5.0.1;



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017\_int\_base = 6.97

**SPECspeed2017\_int\_peak = Not Run**

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2017  
Hardware Availability: Sep-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	376	4.72	371	4.78	<b>372</b>	<b>4.77</b>							
602.gcc_s	64	529	7.53	<b>526</b>	<b>7.58</b>	521	7.64							
605.mcf_s	64	524	9.01	<b>523</b>	<b>9.02</b>	520	9.09							
620.omnetpp_s	64	<b>312</b>	<b>5.23</b>	308	5.29	333	4.90							
623.xalancbmk_s	64	191	7.42	191	7.41	<b>191</b>	<b>7.42</b>							
625.x264_s	64	197	8.94	<b>197</b>	<b>8.94</b>	197	8.97							
631.deepsjeng_s	64	365	3.93	361	3.97	<b>362</b>	<b>3.96</b>							
641.leela_s	64	<b>520</b>	<b>3.28</b>	520	3.28	520	3.28							
648.exchange2_s	64	<b>291</b>	<b>10.1</b>	290	10.1	292	10.1							
657.xz_s	64	338	18.3	<b>338</b>	<b>18.3</b>	338	18.3							

SPECspeed2017\_int\_base = 6.97

**SPECspeed2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-32:/root/cpu2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;  
jemalloc: built with the RedHat Enterprise 7.4,  
and the system compiler gcc 4.8.5;  
jemalloc: sources available via jemalloc.net

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017\_int\_base = 6.97

PowerEdge M640 (Intel Xeon Platinum 8153, 2.00Ghz)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2017  
Hardware Availability: Sep-2017  
Software Availability: Sep-2017

## General Notes (Continued)

is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Platform Notes

BIOS settings:  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance  
Turbo Boost enabled  
C States disabled  
Memory Patrol Scrub disabled  
PCI ASPM L1 Link Power Management disabled  
Sysinfo program /root/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-wds7 Tue Nov 7 22:09:50 2017

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz  
2 "physical id"s (chips)  
64 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 16  
siblings : 32  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15  
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017\_int\_base = 6.97

PowerEdge M640 (Intel Xeon Platinum 8153, 2.00Ghz)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Platform Notes (Continued)

```
From lscpu:  
Architecture: x86_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 64  
On-line CPU(s) list: 0-63  
Thread(s) per core: 2  
Core(s) per socket: 16  
Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz  
Stepping: 4  
CPU MHz: 1995.348  
BogoMIPS: 3990.69  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 22528K  
NUMA node0 CPU(s):  
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58  
,60,62  
NUMA node1 CPU(s):  
1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59  
,61,63  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov  
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc  
aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg  
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes  
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt  
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2  
erms invpcid rtm cqmq mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd  
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq_llc cqmq_occup_llc pkru ospke
```

```
/proc/cpuinfo cache data  
cache size : 22528 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a  
physical chip.
```

```
available: 2 nodes (0-1)  
node 0 cpus: 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46 48 50  
52 54 56 58 60 62  
node 0 size: 95335 MB
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017\_int\_base = 6.97

PowerEdge M640 (Intel Xeon Platinum 8153, 2.00Ghz)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Platform Notes (Continued)

```
node 0 free: 94721 MB
node 1 cpus: 1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31 33 35 37 39 41 43 45 47 49 51
53 55 57 59 61 63
node 1 size: 96736 MB
node 1 free: 96279 MB
node distances:
node    0    1
 0:   10   21
 1:   21   10

From /proc/meminfo
MemTotal:           196682072 kB
HugePages_Total:        0
Hugepagesize:         2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
Linux linux-wds7 4.4.70-2-default #1 SMP Wed Jun 7 15:12:06 UTC 2017 (4502c76) x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Nov 7 22:02

SPEC is set to: /root/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       btrfs  85G   25G  830G   3%  /


Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS Dell Inc. 1.0.0 08/10/2017
Memory:
```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017\_int\_base = 6.97

PowerEdge M640 (Intel Xeon Platinum 8153, 2.00Ghz)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Platform Notes (Continued)

6x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666  
6x 00AD063200AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666  
4x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base)  
657.xz\_s(base)

-----  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 620.omnetpp\_s(base) 623.xalancbmk\_s(base) 631.deepsjeng\_s(base)  
641.leela\_s(base)

-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 648.exchange2\_s(base)

-----  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

fort



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017\_int\_base = 6.97

PowerEdge M640 (Intel Xeon Platinum 8153, 2.00Ghz)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017\_int\_base = 6.97

PowerEdge M640 (Intel Xeon Platinum 8153, 2.00Ghz)

SPECspeed2017\_int\_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-11-07 23:09:49-0500.

Report generated on 2018-10-31 16:32:57 by CPU2017 PDF formatter v6067.

Originally published on 2018-02-27.