



# SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECspeed2017\_int\_base = 8.74

## Huawei 5885H V5 (Intel Xeon Gold 6142)

SPECspeed2017\_int\_peak = 9.05

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: May-2018

Software Availability: Mar-2018

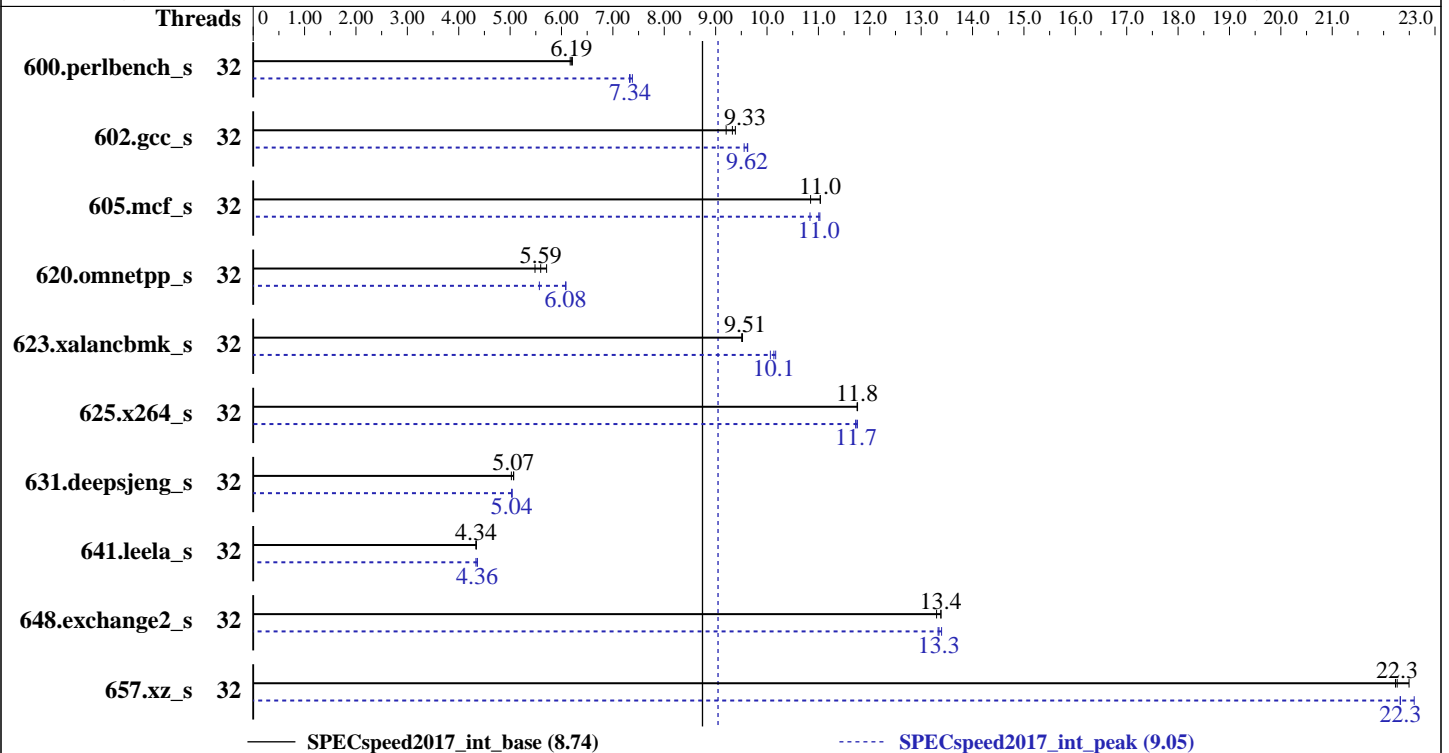

### Hardware

CPU Name: Intel Xeon Gold 6142  
 Max MHz.: 3700  
 Nominal: 2600  
 Enabled: 64 cores, 4 chips  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 22 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 900 GB SAS HDD, 10K RPM  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2  
 4.4.120-92.70-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: Yes  
 Firmware: Version 0.80 released Feb-2018  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECspeed2017\_int\_base = 8.74

## Huawei 5885H V5 (Intel Xeon Gold 6142)

SPECspeed2017\_int\_peak = 9.05

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: May-2018  
Hardware Availability: May-2018  
Software Availability: Mar-2018

### Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	288	6.17	<b><u>287</u></b>	<b><u>6.19</u></b>	286	6.21	32	241	7.38	242	7.33	<b><u>242</u></b>	<b><u>7.34</u></b>
602.gcc_s	32	433	9.20	424	9.38	<b><u>427</u></b>	<b><u>9.33</u></b>	32	417	9.55	414	9.62	<b><u>414</u></b>	<b><u>9.62</u></b>
605.mcf_s	32	<b><u>428</u></b>	<b><u>11.0</u></b>	435	10.8	428	11.0	32	428	11.0	<b><u>429</u></b>	<b><u>11.0</u></b>	436	10.8
620.omnetpp_s	32	286	5.71	<b><u>292</u></b>	<b><u>5.59</u></b>	297	5.48	32	293	5.57	<b><u>268</u></b>	<b><u>6.08</u></b>	268	6.09
623.xalancbmk_s	32	149	9.52	149	9.51	<b><u>149</u></b>	<b><u>9.51</u></b>	32	<b><u>140</u></b>	<b><u>10.1</u></b>	141	10.1	139	10.2
625.x264_s	32	150	11.8	<b><u>150</u></b>	<b><u>11.8</u></b>	150	11.8	32	<b><u>150</u></b>	<b><u>11.7</u></b>	150	11.8	150	11.7
631.deepsjeng_s	32	285	5.02	283	5.07	<b><u>283</u></b>	<b><u>5.07</u></b>	32	285	5.04	<b><u>285</u></b>	<b><u>5.04</u></b>	285	5.03
641.leela_s	32	<b><u>393</u></b>	<b><u>4.34</u></b>	393	4.34	393	4.34	32	391	4.36	394	4.33	<b><u>391</u></b>	<b><u>4.36</u></b>
648.exchange2_s	32	221	13.3	<b><u>220</u></b>	<b><u>13.4</u></b>	220	13.4	32	219	13.4	<b><u>220</u></b>	<b><u>13.3</u></b>	221	13.3
657.xz_s	32	278	22.2	275	22.5	<b><u>278</u></b>	<b><u>22.3</u></b>	32	277	22.3	274	22.6	<b><u>277</u></b>	<b><u>22.3</u></b>

SPECspeed2017\_int\_base = 8.74

SPECspeed2017\_int\_peak = 9.05

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa\_balancing"

### General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for

32bit (i686) and 64bit (x86\_64) targets;

jemalloc: built with the RedHat Enterprise 7.4,

and the system compiler gcc 4.8.5;

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Huawei**

SPECspeed2017\_int\_base = 8.74

**Huawei 5885H V5 (Intel Xeon Gold 6142)**

SPECspeed2017\_int\_peak = 9.05

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** May-2018  
**Hardware Availability:** May-2018  
**Software Availability:** Mar-2018

## General Notes (Continued)

jemalloc: sources available from jemalloc.net or  
<https://github.com/jemalloc/jemalloc/releases>;

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Sub NUMA Cluster (SNC) set to enabled

IMC (Integrated memory controller) Interleaving set to 1 way interleave

Extended Prediction Table (XPT) Prefetch set to Enable

Memory Patrol Scrub set to Disable

Last Level Cache (LLC) Prefetch set to Disable

Hyper-Threading set to Disable

sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-52qc Wed May 9 17:20:02 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6142 CPU @ 2.60GHz

4 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 16

siblings : 16

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 64

On-line CPU(s) list: 0-63

Thread(s) per core: 1

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECspeed2017\_int\_base = 8.74

## Huawei 5885H V5 (Intel Xeon Gold 6142)

SPECspeed2017\_int\_peak = 9.05

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** May-2018  
**Hardware Availability:** May-2018  
**Software Availability:** Mar-2018

### Platform Notes (Continued)

```

Core(s) per socket:      16
Socket(s):               4
NUMA node(s):           4
Vendor ID:               GenuineIntel
CPU family:              6
Model:                   85
Model name:              Intel(R) Xeon(R) Gold 6142 CPU @ 2.60GHz
Stepping:                4
CPU MHz:                 1000.000
CPU max MHz:             2601.0000
CPU min MHz:             1000.0000
BogoMIPS:                5200.00
Virtualization:         VT-x
L1d cache:               32K
L1i cache:               32K
L2 cache:                1024K
L3 cache:                22528K
NUMA node0 CPU(s):      0-15
NUMA node1 CPU(s):      16-31
NUMA node2 CPU(s):      32-47
NUMA node3 CPU(s):      48-63
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 385280 MB
node 0 free: 384833 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31
node 1 size: 387048 MB
node 1 free: 386610 MB
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
node 2 size: 387048 MB
node 2 free: 386681 MB

```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECspeed2017\_int\_base = 8.74

## Huawei 5885H V5 (Intel Xeon Gold 6142)

SPECspeed2017\_int\_peak = 9.05

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** May-2018  
**Hardware Availability:** May-2018  
**Software Availability:** Mar-2018

### Platform Notes (Continued)

```

node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63
node 3 size: 386888 MB
node 3 free: 386495 MB
node distances:
node  0  1  2  3
  0:  10  21  21  21
  1:  21  10  21  21
  2:  21  21  10  21
  3:  21  21  21  10

From /proc/meminfo
MemTotal:      1583377308 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 2
    # This file is deprecated and will be removed in a future service pack or release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP2"
    VERSION_ID="12.2"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-52qc 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
x86_64 x86_64 x86_64 GNU/Linux

run-level 5 May 9 17:18

SPEC is set to: /home/cpu2017
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda4        btrfs    697G  149G  547G  22% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are

```

(Continued on next page)



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECspeed2017\_int\_base = 8.74

## Huawei 5885H V5 (Intel Xeon Gold 6142)

SPECspeed2017\_int\_peak = 9.05

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** May-2018  
**Hardware Availability:** May-2018  
**Software Availability:** Mar-2018

### Platform Notes (Continued)

frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
BIOS INSYDE Corp. 0.80 02/24/2018

Memory:  
48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

### Compiler Version Notes

=====  
CC 600.perlbench\_s(base) 602.gcc\_s(base) 605.mcf\_s(base) 625.x264\_s(base,  
peak) 657.xz\_s(base)

-----  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 600.perlbench\_s(peak) 602.gcc\_s(peak) 605.mcf\_s(peak) 657.xz\_s(peak)

-----  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 620.omnetpp\_s(base) 623.xalanbmk\_s(base) 631.deepsjeng\_s(base)  
641.leela\_s(base)

-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CXXC 620.omnetpp\_s(peak) 623.xalanbmk\_s(peak) 631.deepsjeng\_s(peak)  
641.leela\_s(peak)

-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 648.exchange2\_s(base, peak)

-----  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Huawei**

SPECspeed2017\_int\_base = 8.74

**Huawei 5885H V5 (Intel Xeon Gold 6142)**

SPECspeed2017\_int\_peak = 9.05

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** May-2018  
**Hardware Availability:** May-2018  
**Software Availability:** Mar-2018

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Huawei**

SPECspeed2017\_int\_base = 8.74

**Huawei 5885H V5 (Intel Xeon Gold 6142)**

SPECspeed2017\_int\_peak = 9.05

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** May-2018  
**Hardware Availability:** May-2018  
**Software Availability:** Mar-2018

## Base Other Flags

C benchmarks:  
-m64 -std=c11

C++ benchmarks:  
-m64

Fortran benchmarks:  
-m64

## Peak Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

## Peak Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
```

(Continued on next page)





# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_int\_base = 8.74

Huawei 5885H V5 (Intel Xeon Gold 6142)

SPECspeed2017\_int\_peak = 9.05

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: May-2018

Software Availability: Mar-2018

## Peak Optimization Flags (Continued)

600.perlbench\_s (continued):

```
-DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3  
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
625.x264_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

657.xz\_s: Same as 602.gcc\_s

C++ benchmarks:

```
620.omnetpp_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
623.xalancbmk_s: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: Same as 620.omnetpp\_s

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```



# SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_int\_base = 8.74

Huawei 5885H V5 (Intel Xeon Gold 6142)

SPECspeed2017\_int\_peak = 9.05

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: May-2018

Hardware Availability: May-2018

Software Availability: Mar-2018

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks (except as noted below):

-m64

623.xalancbmk\_s: -m32

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-05-09 05:20:01-0400.

Report generated on 2018-10-31 17:34:12 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-26.