



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECspeed®2017_fp_base = 167

SPECspeed®2017_fp_peak = 170

CPU2017 License: 006042


Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jun-2021

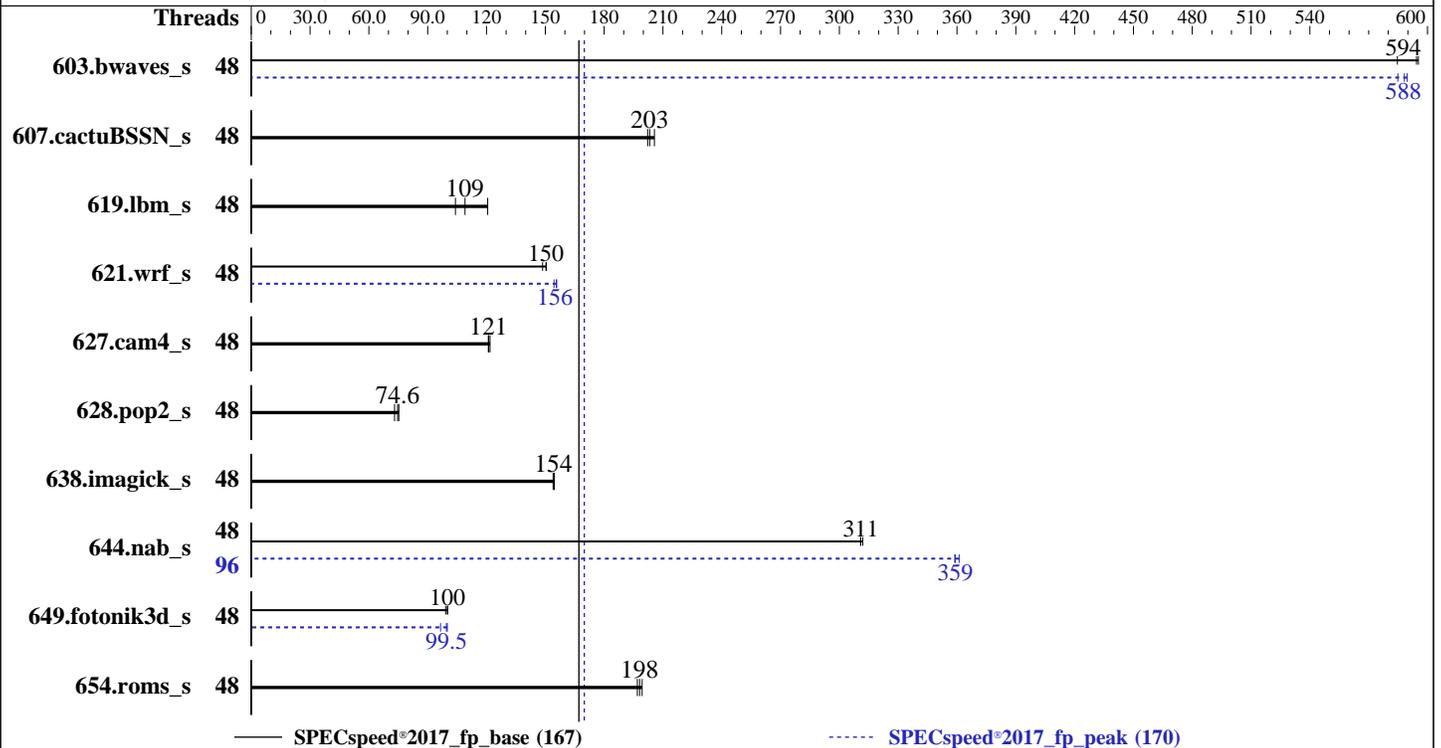

Hardware

CPU Name: Intel Xeon Gold 6336Y
 Max MHz: 3600
 Nominal: 2400
 Enabled: 48 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 36 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 1Rx4 PC4-3200AA-R)
 Storage: 1 x 250 GB SATA SSD
 Other: None

Software

OS: CentOS Linux release 8.4.2105
 Kernel 4.18.0-305.3.1.el8.x86_64
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
 Parallel: Yes
 Firmware: Version SE5C620.86B.01.01.0003.2104260124 released Apr-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECSpeed®2017_fp_base = 167

SPECSpeed®2017_fp_peak = 170

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jun-2021

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	99.3	594	99.1	595	101	585	48	101	585	100	588	100	590
607.cactuBSSN_s	48	82.0	203	81.1	206	82.4	202	48	82.0	203	81.1	206	82.4	202
619.lbm_s	48	50.3	104	43.4	121	48.0	109	48	50.3	104	43.4	121	48.0	109
621.wrf_s	48	89.0	149	87.9	150	88.0	150	48	85.6	154	84.9	156	85.0	156
627.cam4_s	48	73.3	121	72.8	122	73.2	121	48	73.3	121	72.8	122	73.2	121
628.pop2_s	48	159	74.6	158	75.3	162	73.1	48	159	74.6	158	75.3	162	73.1
638.imagick_s	48	93.3	155	93.6	154	93.7	154	48	93.3	155	93.6	154	93.7	154
644.nab_s	48	56.0	312	56.2	311	56.2	311	96	48.4	361	48.7	359	48.7	359
649.fotonik3d_s	48	91.0	100	91.1	100	91.9	99.2	48	91.6	99.5	94.4	96.6	91.1	100
654.roms_s	48	79.0	199	79.5	198	79.9	197	48	79.0	199	79.5	198	79.9	197

SPECSpeed®2017_fp_base = **167**

SPECSpeed®2017_fp_peak = **170**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled locally by Netweb
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECSpeed®2017_fp_base = 167

SPECSpeed®2017_fp_peak = 170

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jun-2021

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Power Technology set to Custom

Power Performance Tuning set to BIOS Controls EPB

ENERGY_PERF_BIAS_CFG mode set to Performance

LLC Dead Line Alloc set to Disable

sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost.localdomain Mon Aug 23 04:30:43 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz

2 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23

From lscpu from util-linux 2.32.1:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 96

On-line CPU(s) list: 0-95

Thread(s) per core: 2

Core(s) per socket: 24

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECspeed®2017_fp_base = 167

SPECspeed®2017_fp_peak = 170

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jun-2021

Platform Notes (Continued)

```

Socket(s):                2
NUMA node(s):             4
Vendor ID:                GenuineIntel
BIOS Vendor ID:          Intel(R) Corporation
CPU family:               6
Model:                    106
Model name:               Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz
BIOS Model name:          Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz
Stepping:                 6
CPU MHz:                  1575.316
CPU max MHz:              3600.0000
CPU min MHz:              800.0000
BogoMIPS:                 4800.00
Virtualization:           VT-x
L1d cache:                48K
L1i cache:                32K
L2 cache:                 1280K
L3 cache:                 36864K
NUMA node0 CPU(s):        0-11,48-59
NUMA node1 CPU(s):        12-23,60-71
NUMA node2 CPU(s):        24-35,72-83
NUMA node3 CPU(s):        36-47,84-95
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms
invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat
pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid fsrm md_clear pconfig flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36864 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 48 49 50 51 52 53 54 55 56 57 58 59

node 0 size: 257671 MB

node 0 free: 256471 MB

node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 60 61 62 63 64 65 66 67 68 69 70 71

node 1 size: 258005 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECspeed®2017_fp_base = 167

SPECspeed®2017_fp_peak = 170

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jun-2021

Platform Notes (Continued)

```

node 1 free: 257549 MB
node 2 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 72 73 74 75 76 77 78 79 80 81 82 83
node 2 size: 258042 MB
node 2 free: 255424 MB
node 3 cpus: 36 37 38 39 40 41 42 43 44 45 46 47 84 85 86 87 88 89 90 91 92 93 94 95
node 3 size: 258040 MB
node 3 free: 253503 MB
node distances:
node  0  1  2  3
  0:  10  11  20  20
  1:  11  10  20  20
  2:  20  20  10  11
  3:  20  20  11  10

```

From /proc/meminfo

```

MemTotal:      1056521552 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/sbin/tuned-adm active

Current active profile: throughput-performance

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

From /etc/*release* /etc/*version*

```

centos-release: CentOS Linux release 8.4.2105
centos-release-upstream: Derived from Red Hat Enterprise Linux 8.4
os-release:
  NAME="CentOS Linux"
  VERSION="8"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="8"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="CentOS Linux 8"
  ANSI_COLOR="0;31"
redhat-release: CentOS Linux release 8.4.2105
system-release: CentOS Linux release 8.4.2105
system-release-cpe: cpe:/o:centos:centos:8

```

uname -a:

```

Linux localhost.localdomain 4.18.0-305.3.1.el8.x86_64 #1 SMP Tue Jun 1 16:14:33 UTC
2021 x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECSpeed®2017_fp_base = 167

SPECSpeed®2017_fp_peak = 170

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jun-2021

Platform Notes (Continued)

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Aug 23 00:27

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/cl-home	xfs	163G	91G	73G	56%	/home

```

From /sys/devices/virtual/dmi/id
Vendor:          Intel Corporation
Product:         WHITLEY
Product Family: Family
Serial:          UNKNOWN

```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
32x Micron 18ASF4G72PZ-3G2E1 32 GB 1 rank 3200

```

BIOS:
  BIOS Vendor:      Intel Corporation
  BIOS Version:     SE5C620.86B.01.01.0003.2104260124
  BIOS Date:        04/26/2021

```

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base)

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero IDI100C2R-28
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECspeed®2017_fp_base = 167
SPECspeed®2017_fp_peak = 170

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Aug-2021
Hardware Availability: Apr-2021
Software Availability: Jun-2021

Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 644.nab_s(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
644.nab_s(base)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 644.nab_s(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28

(2.40 GHz, Intel Xeon Gold 6336Y)

SPECspeed®2017_fp_base = 167

SPECspeed®2017_fp_peak = 170

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jun-2021

Compiler Version Notes (Continued)

| 654.roms_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
628.pop2_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECspeed®2017_fp_base = 167

SPECspeed®2017_fp_peak = 170

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jun-2021

Base Portability Flags (Continued)

644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries

Fortran benchmarks:

-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries -L/usr/local/je5.0.1-64/lib -ljemalloc

Benchmarks using both Fortran and C:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc

Benchmarks using Fortran, C, and C++:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

644.nab_s: icx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECspeed®2017_fp_base = 167

SPECspeed®2017_fp_peak = 170

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jun-2021

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -fiopenmp
-DSPEC_OPENMP -qopt-mem-layout-trans=4
-fimf-accuracy-bits=14:sqrt
-mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc

649.fotonik3d_s: Same as 603.bwaves_s

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
-prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries -nostandard-realloc-lhs

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero IDI100C2R-28
(2.40 GHz, Intel Xeon Gold 6336Y)

SPECspeed®2017_fp_base = 167

SPECspeed®2017_fp_peak = 170

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jun-2021

Peak Optimization Flags (Continued)

621.wrf_s (continued):

`-L/usr/local/je5.0.1-64/lib -ljemalloc`

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revI.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revI.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-08-23 04:30:43-0400.

Report generated on 2021-09-20 13:58:24 by CPU2017 PDF formatter v6442.

Originally published on 2021-09-20.