



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V2  
(3.20 GHz, Intel Xeon E-2388G)

SPECrate®2017\_fp\_base = 60.1

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 9017


Test Date: Feb-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Jun-2021

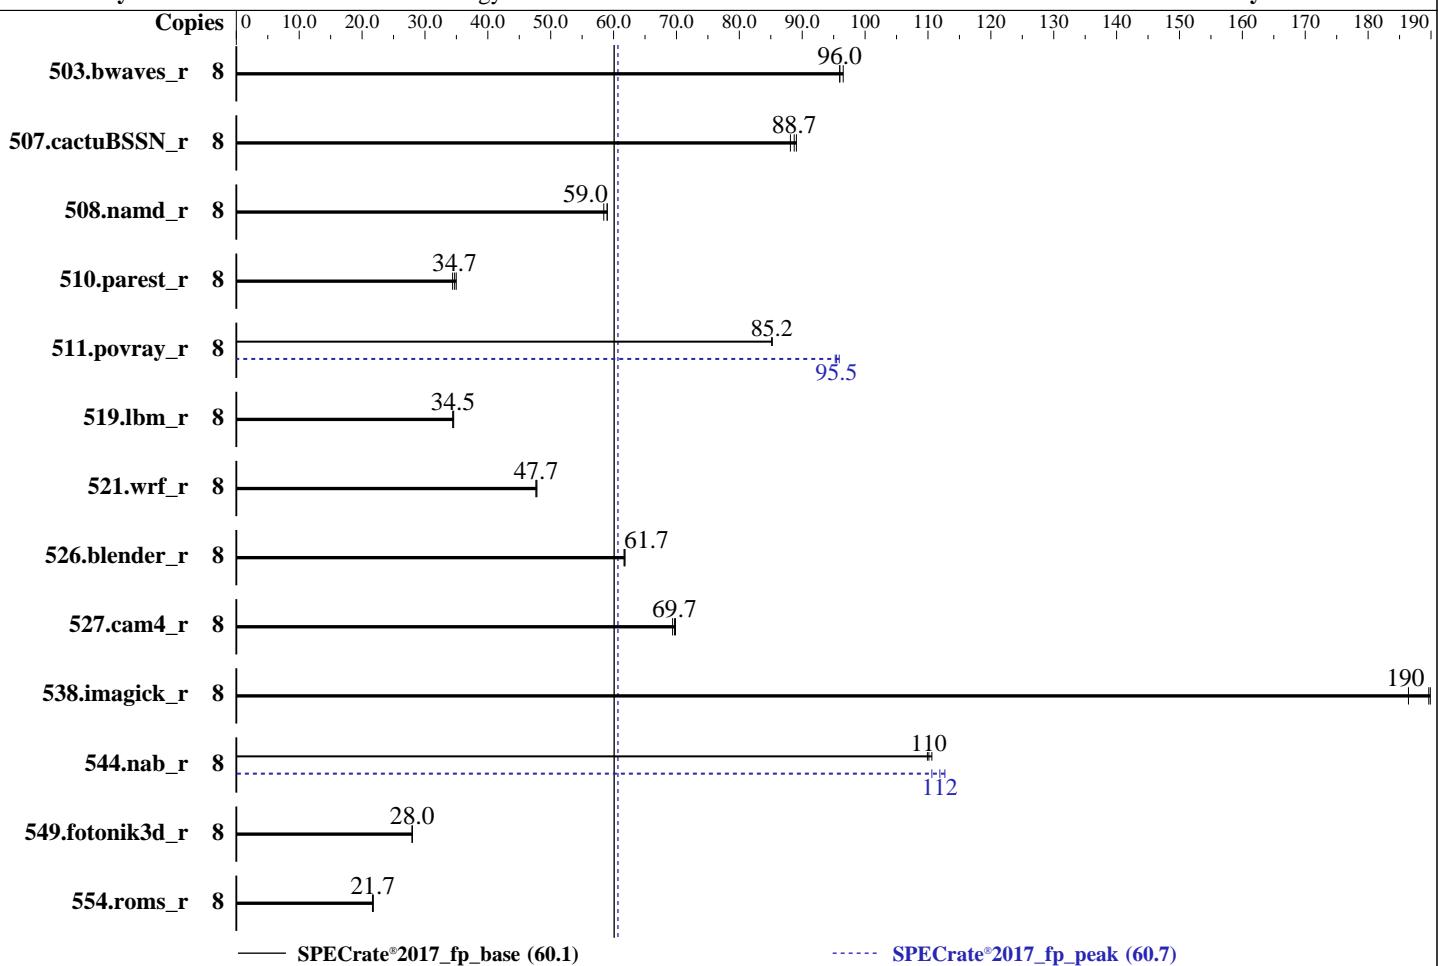

— SPECrate®2017\_fp\_base (60.1)

----- SPECrate®2017\_fp\_peak (60.7)

### Hardware

CPU Name: Intel Xeon E-2388G  
Max MHz: 5100  
Nominal: 3200  
Enabled: 8 cores, 1 chip  
Orderable: 1 chip  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 16 MB I+D on chip per chip  
Other: None  
Memory: 32 GB (2 x 16 GB 2Rx8 PC4-3200AA-E)  
Storage: 1 x 960 GB SATA SSD  
Other: None

OS:

SUSE Linux Enterprise Server 15 SP3 (x86\_64)  
Kernel 5.3.18-57-default

Compiler:

C/C++: Version 2021.1 of Intel oneAPI DPC++/C++  
Compiler Build 20201113 for Linux;  
Fortran: Version 2021.1 of Intel Fortran Compiler  
Classic Build 20201112 for Linux;  
C/C++: Version 2021.1 of Intel C/C++ Compiler  
Classic Build 20201112 for Linux

Parallel:

No

Firmware:

Lenovo BIOS Version TQE101Q 1.00 released Dec-2021

File System:

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc memory allocator V5.0.1

Power Management: BIOS and OS set to prefer performance  
at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V2  
(3.20 GHz, Intel Xeon E-2388G)

SPECrate®2017\_fp\_base = 60.1

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 9017

Test Date: Feb-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Jun-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	8	831	96.5	836	96.0	<b>836</b>	<b>96.0</b>	8	831	96.5	836	96.0	<b>836</b>	<b>96.0</b>
507.cactuBSSN_r	8	115	88.1	<b>114</b>	<b>88.7</b>	114	89.1	8	115	88.1	<b>114</b>	<b>88.7</b>	114	89.1
508.namd_r	8	129	59.0	<b>129</b>	<b>59.0</b>	130	58.4	8	129	59.0	<b>129</b>	<b>59.0</b>	130	58.4
510.parest_r	8	<b>603</b>	<b>34.7</b>	598	35.0	608	34.4	8	<b>603</b>	<b>34.7</b>	598	35.0	608	34.4
511.povray_r	8	<b>219</b>	<b>85.2</b>	219	85.2	219	85.2	8	195	95.9	196	95.2	<b>196</b>	<b>95.5</b>
519.lbm_r	8	244	34.6	<b>245</b>	<b>34.5</b>	245	34.4	8	244	34.6	<b>245</b>	<b>34.5</b>	245	34.4
521.wrf_r	8	375	47.8	376	47.7	<b>376</b>	<b>47.7</b>	8	375	47.8	376	47.7	<b>376</b>	<b>47.7</b>
526.blender_r	8	197	61.7	197	61.8	<b>197</b>	<b>61.7</b>	8	197	61.7	197	61.8	<b>197</b>	<b>61.7</b>
527.cam4_r	8	200	69.8	<b>201</b>	<b>69.7</b>	202	69.4	8	200	69.8	<b>201</b>	<b>69.7</b>	202	69.4
538.imagick_r	8	105	190	<b>105</b>	<b>190</b>	107	186	8	105	190	<b>105</b>	<b>190</b>	107	186
544.nab_r	8	123	110	<b>122</b>	<b>110</b>	122	111	8	122	111	119	113	<b>120</b>	<b>112</b>
549.fotonik3d_r	8	1114	28.0	<b>1114</b>	<b>28.0</b>	1115	28.0	8	1114	28.0	<b>1114</b>	<b>28.0</b>	1115	28.0
554.roms_r	8	587	21.6	<b>586</b>	<b>21.7</b>	584	21.8	8	587	21.6	<b>586</b>	<b>21.7</b>	584	21.8

SPECrate®2017\_fp\_base = 60.1

SPECrate®2017\_fp\_peak = 60.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017-1.1.8-ic2021.1-revA-update1/lib/intel64:/home/cpu2017-1.1
    .8-ic2021.1-revA-update1/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7940X CPU + 64GB RAM memory using openSUSE Leap 15.2

Transparent Huge Pages disabled by default  
echo never > /sys/kernel/mm/transparent\_hugepage/enabled

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V2  
(3.20 GHz, Intel Xeon E-2388G)

SPECrate®2017\_fp\_base = 60.1

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 9017

Test Date: Feb-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Jun-2021

## General Notes (Continued)

```
echo never > /sys/kernel/mm/transparent_hugepage/defrag
```

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from [jemalloc.net](http://jemalloc.net) or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
Hyper-Threading set to Disabled

```
Sysinfo program /home/cpu2017-1.1.8-ic2021.1-revA-updated1/bin/sysinfo
```

```
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
```

```
running on localhost Sat Feb 12 20:41:54 2022
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) E-2388G CPU @ 3.20GHz
```

```
1 "physical id"s (chips)
```

```
8 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
```

```
siblings : 8
```

```
physical 0: cores 0 1 2 3 4 5 6 7
```

From lscpu from util-linux 2.36.2:

```
Architecture: x86_64
```

```
CPU op-mode(s): 32-bit, 64-bit
```

```
Byte Order: Little Endian
```

```
Address sizes: 39 bits physical, 48 bits virtual
```

```
CPU(s): 8
```

```
On-line CPU(s) list: 0-7
```

```
Thread(s) per core: 1
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V2  
(3.20 GHz, Intel Xeon E-2388G)

**SPECrate®2017\_fp\_base = 60.1**

**SPECrate®2017\_fp\_peak = 60.7**

CPU2017 License: 9017

Test Date: Feb-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Jun-2021

## Platform Notes (Continued)

Core(s) per socket:	8
Socket(s):	1
NUMA node(s):	1
Vendor ID:	GenuineIntel
CPU family:	6
Model:	167
Model name:	Intel(R) Xeon(R) E-2388G CPU @ 3.20GHz
Stepping:	1
CPU MHz:	4600.000
BogoMIPS:	6384.00
Virtualization:	VT-x
L1d cache:	384 KiB
L1i cache:	256 KiB
L2 cache:	4 MiB
L3 cache:	16 MiB
NUMA node0 CPU(s):	0-7
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movebe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid mpx avx512f avx512dq rdseed adx smap avx512ifma clflushopt intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts avx512vbmi umip pkru ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq rdpid fsrm md_clear flush_l1d arch_capabilities

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	384K	12	Data	1	64	1	64
L1i	32K	256K	8	Instruction	1	64	1	64
L2	512K	4M	8	Unified	2	1024	1	64
L3	16M	16M	16	Unified	3	16384	1	64

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V2  
(3.20 GHz, Intel Xeon E-2388G)

SPECrate®2017\_fp\_base = 60.1

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 9017

Test Date: Feb-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Jun-2021

## Platform Notes (Continued)

```
/proc/cpuinfo cache data
    cache size : 16384 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 32025 MB
node 0 free: 30656 MB
node distances:
node 0
 0: 10
```

```
From /proc/meminfo
MemTotal:       32794424 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15-SP3"
  VERSION_ID="15.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp3"
```

```
uname -a:
Linux localhost 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021 (ba3c2e9) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V2  
(3.20 GHz, Intel Xeon E-2388G)

SPECrate®2017\_fp\_base = 60.1

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 9017

Test Date: Feb-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Jun-2021

## Platform Notes (Continued)

conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Feb 12 01:16

SPEC is set to: /home/cpu2017-1.1.8-ic2021.1-revA-update1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb3	xfs	892G	34G	858G	4%	/

From /sys/devices/virtual/dmi/id

Vendor:	Lenovo
Product:	ThinkSystem SR250 V2
Product Family:	ThinkSystem
Serial:	1234567890

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x SK Hynix HMA82GU7DJR8N-XN 16 GB 2 rank 3200

BIOS:

BIOS Vendor:	Lenovo
BIOS Version:	TQE101Q-1.00
BIOS Date:	12/29/2021
BIOS Revision:	1.0
Firmware Revision:	0.90

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
| 544.nab\_r(base, peak)

=====

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V2  
(3.20 GHz, Intel Xeon E-2388G)

SPECrate®2017\_fp\_base = 60.1

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 9017

Test Date: Feb-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Jun-2021

## Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====| 511.povray\_r(peak)

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====| 511.povray\_r(base) 526.blender\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====| 511.povray\_r(peak)

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====| 511.povray\_r(base) 526.blender\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V2  
(3.20 GHz, Intel Xeon E-2388G)

SPECrate®2017\_fp\_base = 60.1

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 9017

Test Date: Feb-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Jun-2021

## Compiler Version Notes (Continued)

=====

C++, C, Fortran | 507.cactusBSSN\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V2  
(3.20 GHz, Intel Xeon E-2388G)

SPECrate®2017\_fp\_base = 60.1

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 9017

Test Date: Feb-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Jun-2021

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactubSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V2  
(3.20 GHz, Intel Xeon E-2388G)

SPECrate®2017\_fp\_base = 60.1

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 9017

Test Date: Feb-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Jun-2021

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V2  
(3.20 GHz, Intel Xeon E-2388G)

SPECrate®2017\_fp\_base = 60.1

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 9017

Test Date: Feb-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Jun-2021

## Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

511.povray\_r: icpc icc

526.blender\_r: icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -fllto  
-Ofast -qopt-mem-layout-trans=4  
-fimf-accuracy-bits=14:sqrt  
-mbranches-within-32B-boundaries -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: basepeak = yes

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR250 V2  
(3.20 GHz, Intel Xeon E-2388G)

SPECrate®2017\_fp\_base = 60.1

SPECrate®2017\_fp\_peak = 60.7

CPU2017 License: 9017

Test Date: Feb-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2022

Tested by: Lenovo Global Technology

Software Availability: Jun-2021

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-RocketB-A.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-RocketB-A.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-02-12 07:41:53-0500.

Report generated on 2022-03-02 16:37:00 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-01.