



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_int_base = 12.6

PowerEdge R6515 (AMD EPYC 7573X)

SPECSpeed®2017_int_peak = 12.8

CPU2017 License: 55


Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

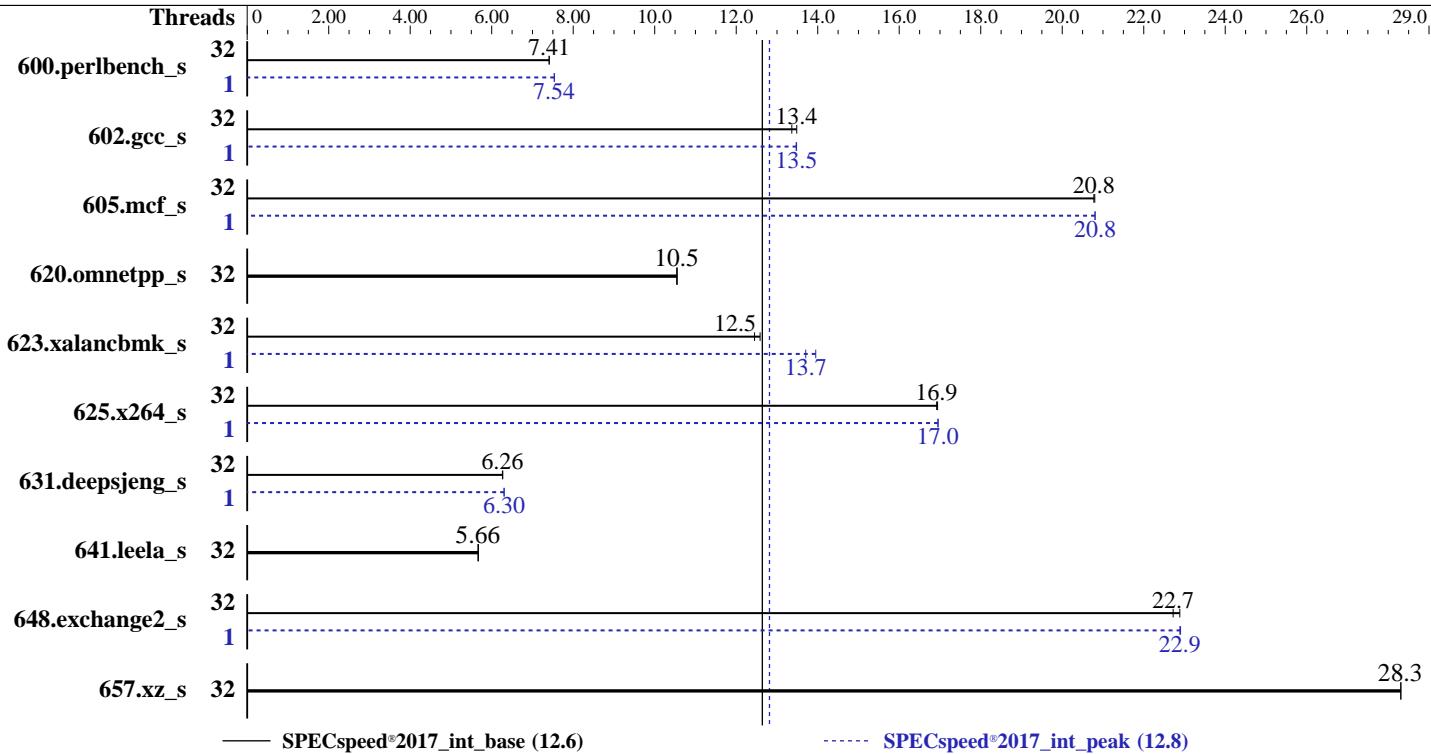

| Hardware | | Software | |
|------------|-----------------------------------------------------|-------------------|------------------------------------------------------------------------------|
| CPU Name: | AMD EPYC 7573X | OS: | Red Hat Enterprise Linux 8.3 (Ootpa) 4.18.0-240.el8.x86_64 |
| Max MHz: | 3600 | Compiler: | C/C++/Fortran: Version 3.2.0 of AOCC |
| Nominal: | 2800 | Parallel: | Yes |
| Enabled: | 32 cores, 1 chip | Firmware: | Version 2.6.5 released Dec-2021 |
| Orderable: | 1 chip | File System: | tmpfs |
| Cache L1: | 32 KB I + 32 KB D on chip per core | System State: | Run level 3 (multi-user) |
| L2: | 512 KB I+D on chip per core | Base Pointers: | 64-bit |
| L3: | 768 MB I+D on chip per chip, 96 MB shared / 4 cores | Peak Pointers: | 64-bit |
| Other: | None | Other: | jemalloc: jemalloc memory allocator library v5.1.0 |
| Memory: | 1 TB (8 x 128 GB 4Rx4 PC4-3200AA-L) | Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage. |
| Storage: | 125 GB on tmpfs | | |
| Other: | None | | |



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.6

PowerEdge R6515 (AMD EPYC 7573X)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|--------------------------------|---------|------------|-------------|------------|-------------|---------|-------|---------|------------|-------------|------------|-------------|---------|-------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 32 | 240 | 7.41 | <u>240</u> | <u>7.41</u> | | | 1 | <u>236</u> | <u>7.54</u> | 236 | 7.54 | | |
| 602.gcc_s | 32 | 295 | 13.5 | <u>298</u> | <u>13.4</u> | | | 1 | 295 | 13.5 | <u>296</u> | <u>13.5</u> | | |
| 605.mcf_s | 32 | <u>227</u> | 20.8 | 227 | 20.8 | | | 1 | <u>227</u> | <u>20.8</u> | 227 | 20.8 | | |
| 620.omnetpp_s | 32 | 155 | 10.6 | <u>155</u> | <u>10.5</u> | | | 32 | 155 | 10.6 | <u>155</u> | <u>10.5</u> | | |
| 623.xalancbmk_s | 32 | 113 | 12.6 | <u>114</u> | <u>12.5</u> | | | 1 | <u>103</u> | <u>13.7</u> | 102 | 14.0 | | |
| 625.x264_s | 32 | <u>104</u> | 16.9 | 104 | 16.9 | | | 1 | 104 | 17.0 | <u>104</u> | <u>17.0</u> | | |
| 631.deepsjeng_s | 32 | 228 | 6.27 | <u>229</u> | <u>6.26</u> | | | 1 | 227 | 6.31 | <u>227</u> | <u>6.30</u> | | |
| 641.leela_s | 32 | <u>301</u> | 5.66 | 301 | 5.67 | | | 32 | <u>301</u> | <u>5.66</u> | 301 | 5.67 | | |
| 648.exchange2_s | 32 | 128 | 22.9 | <u>129</u> | <u>22.7</u> | | | 1 | <u>128</u> | <u>22.9</u> | 128 | 22.9 | | |
| 657.xz_s | 32 | 218 | 28.3 | <u>218</u> | <u>28.3</u> | | | 32 | 218 | 28.3 | <u>218</u> | <u>28.3</u> | | |
| SPECspeed®2017_int_base = 12.6 | | | | | | | | | | | | | | |
| SPECspeed®2017_int_peak = 12.8 | | | | | | | | | | | | | | |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
 To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.6

PowerEdge R6515 (AMD EPYC 7573X)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-31"  
LD_LIBRARY_PATH =  
    "/mnt/ramdisk/cpu2017-1.1.8-aocc320-A1/amd_speed_aocc320_milanx_A_lib/li  
    b;/mnt/ramdisk/cpu2017-1.1.8-aocc320-A1/amd_speed_aocc320_milanx_A_lib/l  
    ib32:"  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "32"
```

Environment variables set by runcpu during the 600.perlbench_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 602.gcc_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 648.exchange2_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.6

PowerEdge R6515 (AMD EPYC 7573X)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

Logical Processor : Disabled

L3 Cache as NUMA Domain : Enabled

Virtualization Technology : Disabled

DRAM Refresh Delay : Performance

System Profile : Custom

CPU Power Management : Maximum Performance

Memory Patrol Scrub : Disabled

PCI ASPM L1 Link

Power Management : Disabled

Algorithm Performance

Boost Disable (ApbDis): Enabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-aocc320-A1/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d

running on rhel-8-3-amd Fri Feb 25 08:20:15 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7573X 32-Core Processor

1 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 32

siblings : 32

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.6

PowerEdge R6515 (AMD EPYC 7573X)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Platform Notes (Continued)

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31

From lscpu from util-linux 2.32.1:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 32
On-line CPU(s) list: 0-31
Thread(s) per core: 1
Core(s) per socket: 32
Socket(s): 1
NUMA node(s): 8
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7573X 32-Core Processor
Stepping: 2
CPU MHz: 1794.679
BogoMIPS: 5589.46
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 98304K
NUMA node0 CPU(s): 0-3
NUMA node1 CPU(s): 4-7
NUMA node2 CPU(s): 8-11
NUMA node3 CPU(s): 12-15
NUMA node4 CPU(s): 16-19
NUMA node5 CPU(s): 20-23
NUMA node6 CPU(s): 24-27
NUMA node7 CPU(s): 28-31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpf perf_pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqmq_l1c cqmq_occup_l1c cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

/proc/cpuinfo cache data

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.6

PowerEdge R6515 (AMD EPYC 7573X)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Platform Notes (Continued)

cache size : 512 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3
node 0 size: 128587 MB
node 0 free: 128325 MB
node 1 cpus: 4 5 6 7
node 1 size: 129020 MB
node 1 free: 128918 MB
node 2 cpus: 8 9 10 11
node 2 size: 129018 MB
node 2 free: 128841 MB
node 3 cpus: 12 13 14 15
node 3 size: 129014 MB
node 3 free: 128936 MB
node 4 cpus: 16 17 18 19
node 4 size: 129014 MB
node 4 free: 128820 MB
node 5 cpus: 20 21 22 23
node 5 size: 129016 MB
node 5 free: 128919 MB
node 6 cpus: 24 25 26 27
node 6 size: 129018 MB
node 6 free: 125476 MB
node 7 cpus: 28 29 30 31
node 7 size: 116863 MB
node 7 free: 116737 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10 11 11 11 11 11 11 11
  1: 11 10 11 11 11 11 11 11
  2: 11 11 10 11 11 11 11 11
  3: 11 11 11 10 11 11 11 11
  4: 11 11 11 11 10 11 11 11
  5: 11 11 11 11 11 10 11 11
  6: 11 11 11 11 11 11 10 11
  7: 11 11 11 11 11 11 11 10
```

From /proc/meminfo

```
MemTotal:      1044066044 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/sbin/tuned-adm active
  Current active profile: throughput-performance
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.6

PowerEdge R6515 (AMD EPYC 7573X)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Platform Notes (Continued)

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.3 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.3"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga
```

```
uname -a:
Linux rhel-8-3-amd 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

| | |
|--------------------------------------------------------|---------------------------------------------------------------------------------------------|
| CVE-2018-12207 (iTLB Multihit): | Not affected |
| CVE-2018-3620 (L1 Terminal Fault): | Not affected |
| Microarchitectural Data Sampling: | Not affected |
| CVE-2017-5754 (Meltdown): | Not affected |
| CVE-2018-3639 (Speculative Store Bypass): | Mitigation: Speculative Store Bypass disabled via prctl and seccomp |
| CVE-2017-5753 (Spectre variant 1): | Mitigation: usercopy/swapgs barriers and __user pointer sanitization |
| CVE-2017-5715 (Spectre variant 2): | Mitigation: Full AMD retrampoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling |
| CVE-2020-0543 (Special Register Buffer Data Sampling): | Not affected |
| CVE-2019-11135 (TSX Asynchronous Abort): | Not affected |

run-level 3 Feb 25 08:19

```
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-aocc320-A1
Filesystem      Type   Size  Used Avail Use% Mounted on
tmpfs          tmpfs  125G  3.3G  122G   3% /mnt/ramdisk
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Dell Inc.
Product:         PowerEdge R6515
Product Family:  PowerEdge
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.6

PowerEdge R6515 (AMD EPYC 7573X)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Platform Notes (Continued)

Serial: HTDRG13

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

1x 80AD80B380AD HMABAGL7A2R4N-XS 128 GB 4 rank 3200
7x 80AD863280AD HMABAGL7A2R4N-XS 128 GB 4 rank 3200
8x Not Specified Not Specified

BIOS:

BIOS Vendor: Dell Inc.
BIOS Version: 2.6.5
BIOS Date: 12/28/2021
BIOS Revision: 2.6

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
| peak) 625.x264_s(base, peak) 657.xz_s(base, peak)

=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

=====

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
| 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)

=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

=====

Fortran | 648.exchange2_s(base, peak)

=====

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.6

PowerEdge R6515 (AMD EPYC 7573X)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Compiler Version Notes (Continued)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -futto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.6

PowerEdge R6515 (AMD EPYC 7573X)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs  
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3  
-fveclib=AMDLIBM -ffast-math -fopenmp -futo  
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100  
-finline-aggressive -flv-function-specialization  
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp=true  
-mllvm -convert-pow-exp-to-int=false -z muldefs  
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP  
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4  
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3  
-fveclib=AMDLIBM -ffast-math -fopenmp -futo -z muldefs  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP  
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

C++ benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.6

PowerEdge R6515 (AMD EPYC 7573X)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-enable-licm-vrp  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50  
-fremap-arrays -flv-function-specialization  
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist  
-mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP  
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

602.gcc_s: Same as 600.perlbench_s

605.mcf_s: Same as 600.perlbench_s

```
625.x264_s: -m64 -Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-enable-licm-vrp  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.6

PowerEdge R6515 (AMD EPYC 7573X)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Peak Optimization Flags (Continued)

625.x264_s (continued):

```
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

631.deepsjeng_s: -m64 -Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -convert-pow-exp-to-int=false

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 12.6

PowerEdge R6515 (AMD EPYC 7573X)

SPECspeed®2017_int_peak = 12.8

CPU2017 License: 55

Test Date: Feb-2022

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2022

Tested by: Dell Inc.

Software Availability: Dec-2021

Peak Optimization Flags (Continued)

631.deepsjeng_s (continued):

```
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc  
-lflang
```

641.leela_s: basepeak = yes

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4  
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3  
-fveclib=AMDLIBM -ffast-math -fopenmp -ftlo -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp=libomp -lomp  
-lamdlibm -ljemalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

C++ benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.4.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-02-25 09:20:15-0500.

Report generated on 2022-03-29 18:00:26 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-29.