



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.80 GHz, Intel Xeon Gold 6548N)

SPECrate®2017\_int\_base = 677

SPECrate®2017\_int\_peak = 702

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jun-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

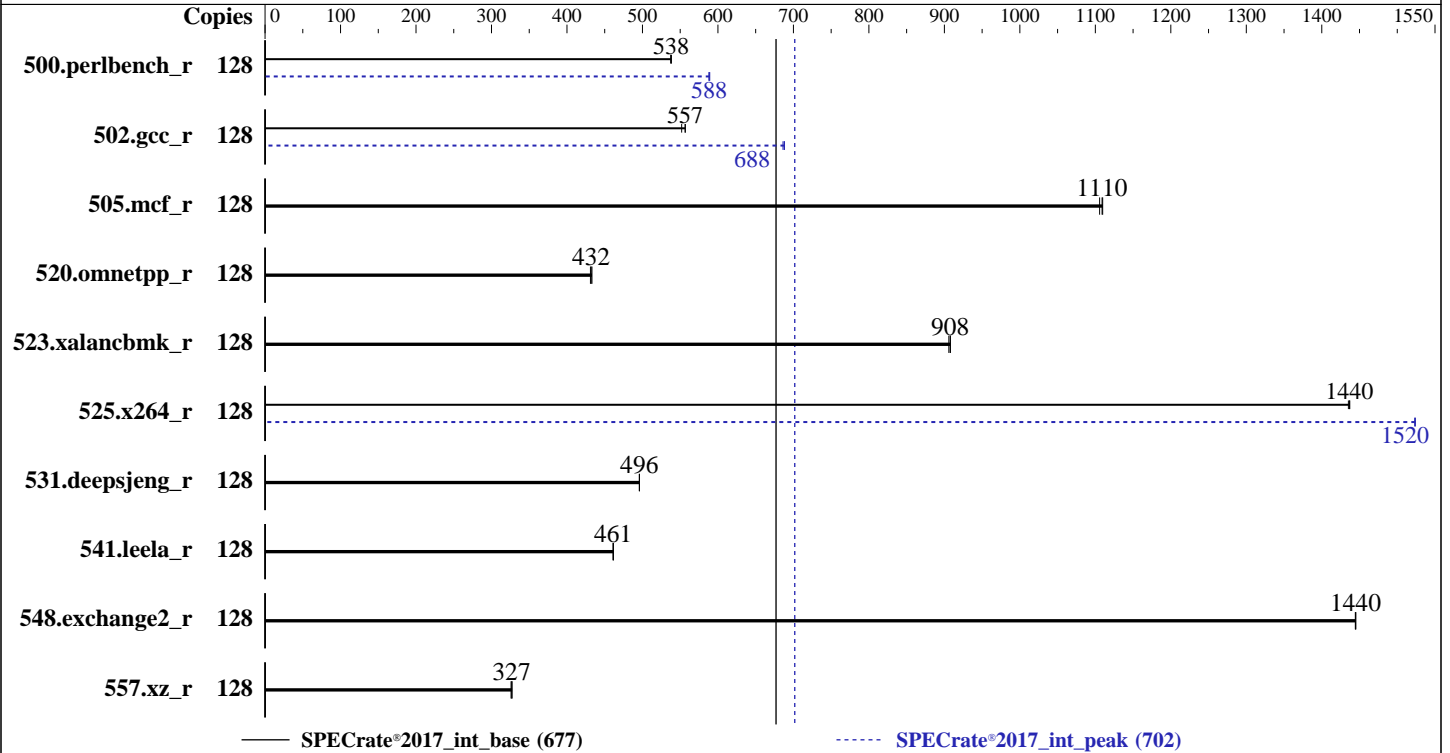

### Hardware

CPU Name: Intel Xeon Gold 6548N  
 Max MHz: 4100  
 Nominal: 2800  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)  
 Storage: 1 x 1.6 TB PCIe NVMe SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise High Performance Computing 15 SP5 (x86\_64)  
 Kernel 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 2201 released Dec-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.80 GHz, Intel Xeon Gold 6548N)

SPECrate®2017\_int\_base = 677

SPECrate®2017\_int\_peak = 702

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jun-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	379	538	379	537	<b>379</b>	<b>538</b>	128	<b>346</b>	<b>588</b>	346	588	346	589
502.gcc_r	128	328	552	326	557	<b>326</b>	<b>557</b>	128	263	688	<b>264</b>	<b>688</b>	264	686
505.mcf_r	128	186	1110	187	1110	<b>187</b>	<b>1110</b>	128	186	1110	187	1110	<b>187</b>	<b>1110</b>
520.omnetpp_r	128	388	433	<b>389</b>	<b>432</b>	390	431	128	388	433	<b>389</b>	<b>432</b>	390	431
523.xalancbmk_r	128	149	908	149	906	<b>149</b>	<b>908</b>	128	149	908	149	906	<b>149</b>	<b>908</b>
525.x264_r	128	156	1440	<b>156</b>	<b>1440</b>	156	1440	128	<b>147</b>	<b>1520</b>	147	1520	147	1520
531.deepsjeng_r	128	<b>296</b>	<b>496</b>	296	496	296	496	128	<b>296</b>	<b>496</b>	296	496	296	496
541.leela_r	128	<b>459</b>	<b>461</b>	459	461	460	461	128	<b>459</b>	<b>461</b>	459	461	460	461
548.exchange2_r	128	<b>232</b>	<b>1440</b>	232	1440	232	1450	128	<b>232</b>	<b>1440</b>	232	1440	232	1450
557.xz_r	128	424	326	422	327	<b>423</b>	<b>327</b>	128	424	326	422	327	<b>423</b>	<b>327</b>

SPECrate®2017\_int\_base = 677

SPECrate®2017\_int\_peak = 702

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/ic24u1/lib/intel64:/ic24u1/lib/ia32:/ic24u1/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.80 GHz, Intel Xeon Gold 6548N)

SPECrate®2017\_int\_base = 677

SPECrate®2017\_int\_peak = 702

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jun-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Mar-2024

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:  
VT-d = Disabled  
Patrol Scrub = Disabled  
SNC = Enable SNC2 (2-clusters)  
LLC dead line allc = Disabled  
Engine Boost = Aggressive  
SR-IOV Support = Disabled  
BMC Configuration:  
Fan mode = Full speed mode

Sysinfo program /ic24ul/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Jun 11 14:33:01 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
   Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
   x86_64 x86_64 x86_64 GNU/Linux
```

2. w

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.80 GHz, Intel Xeon Gold 6548N)

SPECrate®2017\_int\_base = 677

SPECrate®2017\_int\_peak = 702

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Mar-2024

### Platform Notes (Continued)

```
14:33:01 up 0 min, 1 user, load average: 4.91, 1.75, 0.62
USER      TTY      FROM          LOGIN@      IDLE        JCPU        PCPU        WHAT
root      tty1    -             14:32      13.00s     0.86s      0.00s      /bin/bash ./rate.sh
```

3. Username  
From environment variable \$USER: root

4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 4126774  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 4126774  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
/bin/bash ./rate.sh  
/bin/bash ./rate.sh  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c  
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=64 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base,peak -o all intrate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile  
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=64 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base,peak --output\_format all --nopower  
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.047/templogs/preenv.intrate.047.0.log --lognum 047.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /ic24ul

6. /proc/cpuinfo  
model name : INTEL(R) XEON(R) GOLD 6548N  
vendor\_id : GenuineIntel  
cpu family : 6  
model : 207  
stepping : 2  
microcode : 0x21000200  
bugs : spectre\_v1 spectre\_v2 spec\_store\_bypass swapgs eibrs\_pbrsb  
cpu cores : 32  
siblings : 64  
2 physical ids (chips)  
128 processors (hardware threads)  
physical id 0: core ids 0-31  
physical id 1: core ids 0-31

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.80 GHz, Intel Xeon Gold 6548N)

SPECrate®2017\_int\_base = 677

SPECrate®2017\_int\_peak = 702

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jun-2024  
**Hardware Availability:** Dec-2023  
**Software Availability:** Mar-2024

### Platform Notes (Continued)

physical id 0: apicids 0-63  
physical id 1: apicids 128-191

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      128
On-line CPU(s) list:        0-127
Vendor ID:                   GenuineIntel
Model name:                  INTEL(R) XEON(R) GOLD 6548N
CPU family:                  6
Model:                       207
Thread(s) per core:         2
Core(s) per socket:         32
Socket(s):                   2
Stepping:                    2
CPU max MHz:                 4100.0000
CPU min MHz:                 800.0000
BogoMIPS:                    5600.00
Flags:                       fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                             clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                             lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                             nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                             ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                             sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                             lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                             invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                             vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                             bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                             avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                             xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                             cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                             hwp_act_window hwp_epp hwp_pkg_req hfi avx512vbmi umip pku ospke waitpkg
                             avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                             avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                             enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                             amx_tile flush_lld arch_capabilities
Virtualization:              VT-x
L1d cache:                   3 MiB (64 instances)
L1i cache:                   2 MiB (64 instances)
L2 cache:                    128 MiB (64 instances)
L3 cache:                    120 MiB (2 instances)
NUMA node(s):                4
NUMA node0 CPU(s):          0-15,64-79
NUMA node1 CPU(s):          16-31,80-95
NUMA node2 CPU(s):          32-47,96-111
NUMA node3 CPU(s):          48-63,112-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:     Not affected

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.80 GHz, Intel Xeon Gold 6548N)

SPECrate®2017\_int\_base = 677

SPECrate®2017\_int\_peak = 702

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jun-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

### Platform Notes (Continued)

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp  
 Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW sequence  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 257643 MB
node 0 free: 256891 MB
node 1 cpus: 16-31,80-95
node 1 size: 258039 MB
node 1 free: 257356 MB
node 2 cpus: 32-47,96-111
node 2 size: 258039 MB
node 2 free: 257325 MB
node 3 cpus: 48-63,112-127
node 3 size: 258000 MB
node 3 free: 257284 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10
```

9. /proc/meminfo

MemTotal: 1056484992 kB

10. who -r

run-level 3 Jun 11 14:32

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.80 GHz, Intel Xeon Gold 6548N)

SPECrate®2017\_int\_base = 677

SPECrate®2017\_int\_peak = 702

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jun-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

### Platform Notes (Continued)

```

firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd ndctl-monitor nfs
nfs-blkmap nvme-autoconnect rpcbind rpmconfigcheck rsyncd serial-getty@
smartd_generate_opts snmpd snmptrapd svnserv systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
udisks2 vncserver@
wickedd

```

indirect

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=1821a225-9785-4821-9a33-99bd3ded8cae
splash=silent
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 4.10 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.

  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. tuned-adm active
  It seems that tuned daemon is not running, preset profile is not activated.
  Preset profile: latency-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.80 GHz, Intel Xeon Gold 6548N)

SPECrate®2017\_int\_base = 677

SPECrate®2017\_int\_peak = 702

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jun-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

### Platform Notes (Continued)

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

-----  
19. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise High Performance Computing 15 SP5
```

-----  
20. Disk information

```
SPEC is set to: /ic24ul
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p8 xfs 1.3T 110G 1.2T 9% /
```

-----  
21. /sys/devices/virtual/dmi/id

```
Vendor: ASUSTeK COMPUTER INC.
Product: RS720-E11-RS12U
Product Family: Server
Serial: R1S0MD000002
```

-----  
22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x Samsung M321R8GA0PB0-CWMXJ 64 GB 2 rank 5600, configured at 5200

-----  
23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: American Megatrends Inc.
BIOS Version: 2201
BIOS Date: 12/22/2023
BIOS Revision: 22.1
```

### Compiler Version Notes

=====  
C | 502.gcc\_r(peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.80 GHz, Intel Xeon Gold 6548N)

SPECrate®2017\_int\_base = 677

SPECrate®2017\_int\_peak = 702

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jun-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

### Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 548.exchange2\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

### Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E11-RS12U  
(2.80 GHz, Intel Xeon Gold 6548N)

SPECrate®2017\_int\_base = 677

SPECrate®2017\_int\_peak = 702

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Jun-2024

Hardware Availability: Dec-2023

Software Availability: Mar-2024

## Base Portability Flags (Continued)

505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720-E11-RS12U  
(2.80 GHz, Intel Xeon Gold 6548N)

SPECrate®2017\_int\_base = 677

SPECrate®2017\_int\_peak = 702

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jun-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Mar-2024

## Peak Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

557.xz_r: basepeak = yes

```

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720-E11-RS12U  
(2.80 GHz, Intel Xeon Gold 6548N)

SPECrate®2017\_int\_base = 677

SPECrate®2017\_int\_peak = 702

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Jun-2024

**Hardware Availability:** Dec-2023

**Software Availability:** Mar-2024

## Peak Optimization Flags (Continued)

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.3.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.3.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-06-11 02:33:01-0400.

Report generated on 2024-07-03 09:25:24 by CPU2017 PDF formatter v6716.

Originally published on 2024-07-02.