



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 329

PowerEdge R570 (Intel Xeon 6781P)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

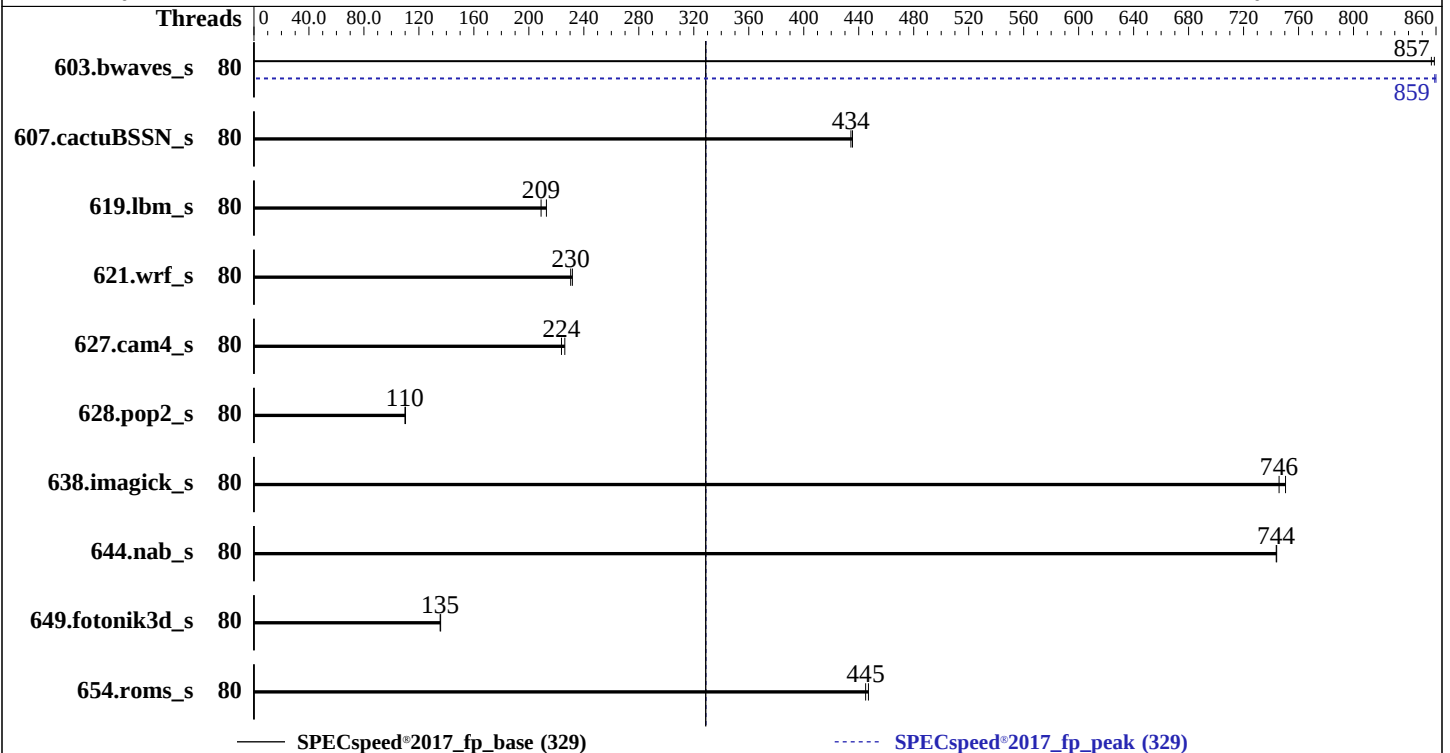

Hardware

CPU Name: Intel Xeon 6781P
Max MHz: 3800
Nominal: 2000
Enabled: 80 cores, 1 chip
Orderable: 1 chip
Cache L1: 64 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 336 MB I+D on chip per chip
Other: None
Memory: 256 GB (8 x 32 GB 2Rx8 PC5-6400B-R)
Storage: 70 GB on tmpfs
Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6
6.4.0-150600.21-default
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++
Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler
for Linux;
Parallel: Yes
Firmware: Version 1.2.6 released Feb-2025
File System: tmpfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of
additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 329

PowerEdge R570 (Intel Xeon 6781P)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	80	68.7	859	<u>68.9</u>	<u>857</u>			80	68.6	860	<u>68.7</u>	<u>859</u>		
607.cactuBSSN_s	80	<u>38.4</u>	<u>434</u>	38.3	435			80	<u>38.4</u>	<u>434</u>	38.3	435		
619.lbm_s	80	<u>25.1</u>	<u>209</u>	24.6	213			80	<u>25.1</u>	<u>209</u>	24.6	213		
621.wrf_s	80	<u>57.4</u>	<u>230</u>	57.1	232			80	<u>57.4</u>	<u>230</u>	57.1	232		
627.cam4_s	80	39.2	226	<u>39.6</u>	<u>224</u>			80	39.2	226	<u>39.6</u>	<u>224</u>		
628.pop2_s	80	108	110	<u>108</u>	<u>110</u>			80	108	110	<u>108</u>	<u>110</u>		
638.imagick_s	80	19.2	751	<u>19.3</u>	<u>746</u>			80	19.2	751	<u>19.3</u>	<u>746</u>		
644.nab_s	80	23.5	744	<u>23.5</u>	<u>744</u>			80	23.5	744	<u>23.5</u>	<u>744</u>		
649.fotonik3d_s	80	67.1	136	<u>67.3</u>	<u>135</u>			80	67.1	136	<u>67.3</u>	<u>135</u>		
654.roms_s	80	<u>35.4</u>	<u>445</u>	35.2	447			80	<u>35.4</u>	<u>445</u>	35.2	447		

SPECspeed®2017_fp_base = 329

SPECspeed®2017_fp_peak = 329

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

is mitigated in the system as tested and documented.

Benchmark run from a 70 GB ramdisk created with the cmd: "mount -t tmpfs -o size=70G tmpfs /mnt/ramdisk"



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 329

PowerEdge R570 (Intel Xeon 6781P)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes

BIOS Settings:

Logical Processor : Disabled
Sub NUMA Cluster : Enabled
MADT Core Enumeration : Linear
LLC Prefetch : Enabled
Optimizer Mode : Enabled

System Profile : Custom
CPU Power Management : Maximum Performance
Energy Efficient Turbo : Disabled
C1E : Disabled
C-States : Disabled
Latency Optimized Mode : Enabled
Energy Efficient Policy : Performance
CPU Interconnect Bus -
Link Power Management : Disabled
PCI ASPM L1 Link Power Management : Disabled
DIMM Self Healing -
on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on 1234567-R570 Mon Apr 7 11:51:48 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

```
-----
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
-----

-----
1. uname -a
   Linux 1234567-R570 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
   x86_64 x86_64 x86_64 GNU/Linux
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 329

PowerEdge R570 (Intel Xeon 6781P)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
2. w
   11:51:48 up 2:38, 1 user, load average: 5.93, 5.69, 3.29
USER  TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root  tty1      -             09:13    2:36m  1.06s  0.00s /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.1a --output_format html, pdf, txt

-----

3. Username
   From environment variable $USER: root

-----

4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority      (-e) 0
   file size               (blocks, -f) unlimited
   pending signals         (-i) 1030169
   max locked memory       (kbytes, -l) 8192
   max memory size         (kbytes, -m) unlimited
   open files              (-n) 1024
   pipe size               (512 bytes, -p) 8
   POSIX message queues    (bytes, -q) 819200
   real-time priority      (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time                (seconds, -t) unlimited
   max user processes      (-u) 1030169
   virtual memory          (kbytes, -v) unlimited
   file locks              (-x) unlimited

-----

5. sysinfo process ancestry
   /usr/lib/systemd/systemd --switched-root --system --deserialize=42
   login -- root
   -bash
   /bin/bash /home/DellFiles/bin/DELL_speed.sh
   /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
   /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
   /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.1a --output_format
   html, pdf, txt
   /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-VERS=6.1a --output_format
   html, pdf, txt
   runcpu --nobuild --action validate --define default-platform-flags -c
   ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=80 --tune base,peak -o all --define
   drop_caches --iterations 2 --define DL-VERS=6.1a --output_format html, pdf, txt fpspeed
   runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=80 --tune base,peak --output_format all
   --define drop_caches --iterations 2 --define DL-VERS=6.1a --output_format html, pdf, txt --nopower --runmode
   speed --tune base:peak --size refspeed fpspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.002/temlogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
   specperl $SPEC/bin/sysinfo
   $SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.1

-----

6. /proc/cpuinfo
   model name      : Intel(R) Xeon(R) 6781P
   vendor_id       : GenuineIntel
   cpu family      : 6
   model           : 173
   stepping        : 1
   microcode       : 0xa0000c0
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 329

PowerEdge R570 (Intel Xeon 6781P)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

bugs : spectre_v1 spectre_v2 spec_store_bypass swaggs bhi
cpu cores : 80
siblings : 80
1 physical ids (chips)
80 processors (hardware threads)
physical id 0: core ids 0-39,64-103
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174
,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	80
On-line CPU(s) list:	0-79
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel
Model name:	Intel(R) Xeon(R) 6781P
BIOS Model name:	Intel(R) Xeon(R) 6781P CPU @ 2.0GHz
BIOS CPU family:	179
CPU family:	6
Model:	173
Thread(s) per core:	1
Core(s) per socket:	80
Socket(s):	1
Stepping:	1
BogoMIPS:	4000.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pcdm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd frsm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	3.8 MiB (80 instances)
L1i cache:	5 MiB (80 instances)
L2 cache:	160 MiB (80 instances)
L3 cache:	336 MiB (1 instance)
NUMA node(s):	2

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 329

PowerEdge R570 (Intel Xeon 6781P)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

NUMA node0 CPU(s): 0-39
NUMA node1 CPU(s): 40-79
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-IBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.8M	12	Data	1	64	1	64
L1i	64K	5M	16	Instruction	1	64	1	64
L2	2M	160M	16	Unified	2	2048	1	64
L3	336M	336M	16	Unified	3	344064	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)
node 0 cpus: 0-39
node 0 size: 128579 MB
node 0 free: 127372 MB
node 1 cpus: 40-79
node 1 size: 128992 MB
node 1 free: 111935 MB
node distances:
node 0 1
0: 10 12
1: 12 10

9. /proc/meminfo

MemTotal: 263753312 kB

10. who -r

run-level 3 Apr 7 09:13

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvmeefc-boot-connections nvmmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 329

PowerEdge R570 (Intel Xeon 6781P)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

enabled-runtime systemd-remount-fs
disabled accounts-daemon autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl
ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables
exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged ipmi ipmievdev
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb
ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@
indirect systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=0bc34718-91fb-4be4-8e39-8e972f4e46f9
splash=silent
resume=/dev/disk/by-uuid/f49adf23-2e24-4b38-a827-6972f1cb36ae
mitigations=auto
quiet
security=apparmor

14. cpupower frequency-info
analyzing CPU 44:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

16. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 329

PowerEdge R570 (Intel Xeon 6781P)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Platform Notes (Continued)

```
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

18. OS release

```
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

19. Disk information

```
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 70G 11G 60G 16% /mnt/ramdisk
```

20. /sys/devices/virtual/dmi/id

```
Vendor: Dell Inc.
Product: PowerEdge R570
Product Family: PowerEdge
Serial: 1234567
```

21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
8x 002C0632002C MTC20F2085S1RC64BD2 MWFF 32 GB 2 rank 6400
```

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor: Dell Inc.
BIOS Version: 1.2.6
BIOS Date: 02/26/2025
BIOS Revision: 1.2
```

Compiler Version Notes

```
====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====
```

```
====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 329

PowerEdge R570 (Intel Xeon 6781P)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Compiler Version Notes (Continued)

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 329

PowerEdge R570 (Intel Xeon 6781P)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Base Portability Flags (Continued)

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 329

PowerEdge R570 (Intel Xeon 6781P)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -w -m64 -wl, -z, muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 329

PowerEdge R570 (Intel Xeon 6781P)

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.13.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.13.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-06 23:51:47-0400.

Report generated on 2025-05-08 09:59:11 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-06.