



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 513

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017_fp_peak = 513

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

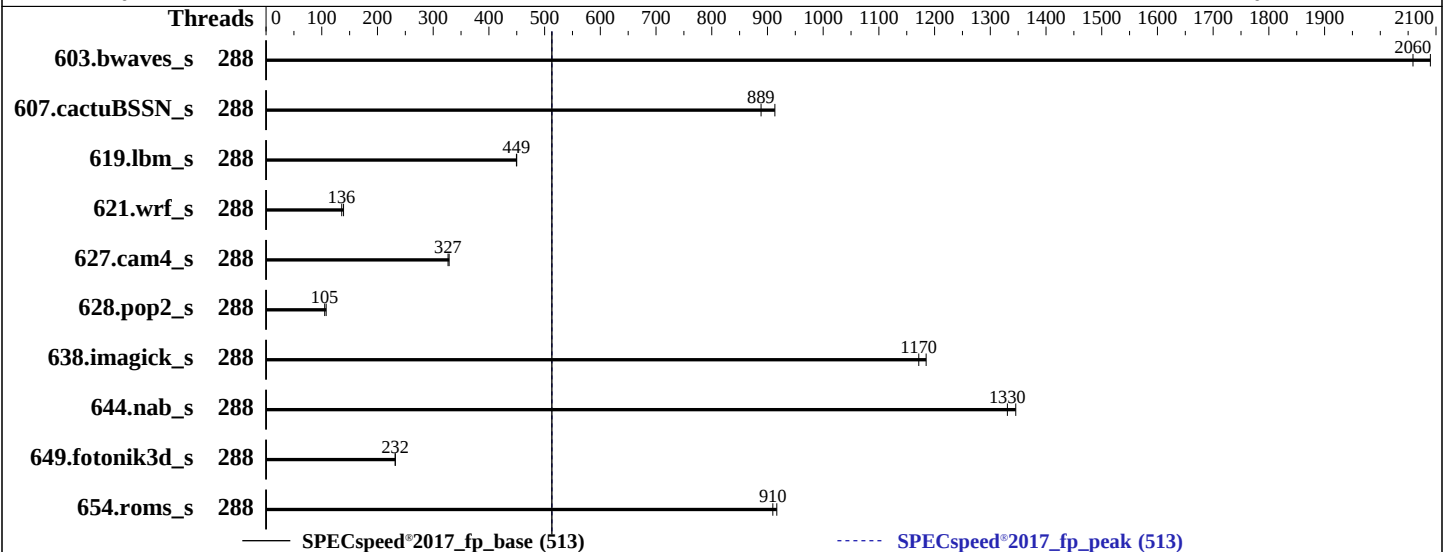

Hardware

CPU Name: AMD EPYC 9825
Max MHz: 3700
Nominal: 2200
Enabled: 288 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip, 32 MB shared / 12 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 150 GB on tmpfs
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04 LTS
6.8.0-58-generic
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: Yes
Firmware: Version 1.1.3 released Feb-2025
File System: tmpfs
System State: Run level 5 (graphical multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None
Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 513

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017_fp_peak = 513

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	288	<u>28.7</u>	<u>2060</u>	28.2	2090			288	<u>28.7</u>	<u>2060</u>	28.2	2090		
607.cactuBSSN_s	288	<u>18.8</u>	<u>889</u>	18.3	913			288	<u>18.8</u>	<u>889</u>	18.3	913		
619.lbm_s	288	<u>11.7</u>	<u>449</u>	11.6	450			288	<u>11.7</u>	<u>449</u>	11.6	450		
621.wrf_s	288	<u>97.4</u>	<u>136</u>	95.1	139			288	<u>97.4</u>	<u>136</u>	95.1	139		
627.cam4_s	288	27.0	329	<u>27.1</u>	<u>327</u>			288	27.0	329	<u>27.1</u>	<u>327</u>		
628.pop2_s	288	110	108	<u>113</u>	<u>105</u>			288	110	108	<u>113</u>	<u>105</u>		
638.imagick_s	288	12.2	1180	<u>12.3</u>	<u>1170</u>			288	12.2	1180	<u>12.3</u>	<u>1170</u>		
644.nab_s	288	13.0	1350	<u>13.1</u>	<u>1330</u>			288	13.0	1350	<u>13.1</u>	<u>1330</u>		
649.fotonik3d_s	288	39.3	232	<u>39.3</u>	<u>232</u>			288	39.3	232	<u>39.3</u>	<u>232</u>		
654.roms_s	288	17.2	917	<u>17.3</u>	<u>910</u>			288	17.2	917	<u>17.3</u>	<u>910</u>		

SPECspeed®2017_fp_base = 513

SPECspeed®2017_fp_peak = 513

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 513

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017_fp_peak = 513

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-287"

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3/amd_speed_aocc500_znver5_A_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3/amd_speed_aocc500_znver5_A_lib/lib32:"

LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "288"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

Benchmark run from a 150 GB ramdisk created with the cmd: "mount -t tmpfs -o size=150G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

Logical Processor : Disabled

Virtualization Technology : Disabled

System Profile : Custom

C-States : Disabled

Memory Patrol Scrub : Disabled

PCI ASPM L1 Link Power Management : Disabled

Periodic Directory Rinse Tuning : Blended

Determinism Control : Manual

Determinism Slider : Power Determinism

Optimizer Mode : Enabled

Algorithm Performance Boost Disable : Enabled

Adaptive Allocation : Enabled

Dram Refresh Delay : Performance

DIMM Self Healing -

on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on 1234567-R7725 Sun May 11 22:45:55 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 513

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017_fp_peak = 513

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Platform Notes (Continued)

```
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
-----

1. uname -a
Linux 1234567-R7725 6.8.0-58-generic #60-Ubuntu SMP PREEMPT_DYNAMIC Fri Mar 14 18:29:48 UTC 2025 x86_64
x86_64 x86_64 GNU/Linux
-----

2. w
 22:45:55 up  2:55,  4 users,  load average: 0.92, 0.98, 0.99
USER  TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
root   tty1      -               19:52    2:52m  1.93s  0.63s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
root   -         100.71.176.53   19:53    387days 0.00s  0.09s sshd: root@notty
root   -         100.71.176.53   19:53    387days 0.00s  0.10s sshd: root@notty
root   -         100.71.176.53   19:57    387days 0.00s  0.11s sshd: root@notty
-----

3. Username
From environment variable $USER:  root
-----

4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            6188638
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
-----

5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_speed.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/dell-run-main.sh speed
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh speed --define DL-VERS=6.2 --output_format
html,pdf,txt
python3 ./run_amd_speed_aocc500_znver5_A1.py
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 513

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017_fp_peak = 513

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Platform Notes (Continued)

```
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-NPS=1 --define DL-VERS=6.2 --output_format html,pdf,txt fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-NPS=1 --define DL-VERS=6.2 --output_format html,pdf,txt --nopower --runmode speed --tune base:peak
--size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/temlogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9825 144-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb101028
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores      : 144
siblings       : 144
2 physical ids (chips)
288 processors (hardware threads)
physical id 0: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
physical id 1: core ids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
physical id 0: apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123,128-139,144-155,160-171,176-187
physical id 1: apicids
256-267,272-283,288-299,304-315,320-331,336-347,352-363,368-379,384-395,400-411,416-427,432-443
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	288
On-line CPU(s) list:	0-287
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	AMD
Model name:	AMD EPYC 9825 144-Core Processor
BIOS Model name:	AMD EPYC 9825 144-Core Processor
BIOS CPU family:	107
CPU family:	26
Model:	17
Thread(s) per core:	1
Core(s) per socket:	144
Socket(s):	2
Stepping:	0
Frequency boost:	enabled
CPU(s) scaling MHz:	41%
CPU max MHz:	3714.6479
CPU min MHz:	1500.0000
BogoMIPS:	4394.10
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 513

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017_fp_peak = 513

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Platform Notes (Continued)

```
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
svm_lock nrp_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
vnm1 avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca avx512_vp2intersect
flush_l1d debug_swap
L1d cache: 13.5 MiB (288 instances)
L1i cache: 9 MiB (288 instances)
L2 cache: 288 MiB (288 instances)
L3 cache: 768 MiB (24 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-143
NUMA node1 CPU(s): 144-287
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
disabled; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	13.5M	12	Data	1	64	1	64
L1i	32K	9M	8	Instruction	1	64	1	64
L2	1M	288M	16	Unified	2	1024	1	64
L3	32M	768M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-143
node 0 size: 773249 MB
node 0 free: 767743 MB
node 1 cpus: 144-287
node 1 size: 773984 MB
node 1 free: 769189 MB
node distances:
node 0 1
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 513

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017_fp_peak = 513

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Platform Notes (Continued)

0: 10 32
1: 32 10

9. /proc/meminfo
MemTotal: 1584367716 kB

10. who -r
run-level 5 May 11 19:52

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8)
Default Target Status
graphical degraded

12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
* fwupd-refresh.service loaded failed failed Refresh fwupd metadata and update motd
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured
Legend: LOAD -> Reflects whether the unit definition was properly loaded.
ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.
SUB -> The low-level unit activation state, values depend on unit type.
2 loaded units listed.

13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd
networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved
systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
systemd-time-wait-sync upower
indirect systemd-sysupdate systemd-sysupdate-reboot uuid
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.8.0-58-generic
root=UUID=c330b932-4a2a-48ee-a22b-539a12ed1698
ro

15. cpupower frequency-info
analyzing CPU 188:
current policy: frequency should be within 1.50 GHz and 2.20 GHz.
The governor "schedutil" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 513

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017_fp_peak = 513

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Platform Notes (Continued)

Boost States: 0
Total States: 3
Pstate-P0: 2200MHz

16. sysctl

```
kernel.numa_balancing      1
kernel.randomize_va_space  0
vm.compaction_proactiveness 20
vm.dirty_background_bytes   0
vm.dirty_background_ratio   10
vm.dirty_bytes              0
vm.dirty_expire_centisecs   3000
vm.dirty_ratio              8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio       1
vm.nr_hugepages              0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages  0
vm.swappiness                1
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         1
```

17. /sys/kernel/mm/transparent_hugepage

```
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

18. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

19. OS release

```
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04 LTS
```

20. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	150G	3.3G	147G	3%	/mnt/ramdisk

21. /sys/devices/virtual/dmi/id

```
Vendor:      Dell Inc.
Product:     PowerEdge R7725
Product Family: PowerEdge
Serial:      1234567
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 513

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017_fp_peak = 513

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Platform Notes (Continued)

22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x 802C0000802C MTC40F2046S1RC64BD1 64 GB 2 rank 6400
2x 802C0000802C MTC40F2046S1RC64BD2 64 GB 2 rank 6400
16x 80AD000080AD HMC94AHBRA487N 64 GB 2 rank 6400
4x 80CE000080CE M321R8GA0PB2-CCPKC 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.

BIOS Version: 1.1.3

BIOS Date: 02/25/2025

BIOS Revision: 1.1

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 513

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017_fp_peak = 513

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Compiler Version Notes (Continued)

=====

Fortran, C		621.wrf_s(base, peak)	627.cam4_s(base, peak)	628.pop2_s(base, peak)
------------	--	-----------------------	------------------------	------------------------

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64

628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 513

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017_fp_peak = 513

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-Wl, -mllvm -Wl, -reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-freemap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=2000000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 513

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017_fp_peak = 513

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Base Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 513

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017_fp_peak = 513

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

Peak Optimization Flags (Continued)

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 513

PowerEdge R7725 (AMD EPYC 9825 144-Core Processor)

SPECspeed®2017_fp_peak = 513

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2025

Hardware Availability: Apr-2025

Software Availability: Mar-2025

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-11 18:45:54-0400.
Report generated on 2025-06-17 18:14:19 by CPU2017 PDF formatter v6716.
Originally published on 2025-06-17.