



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 350

PowerEdge R7715 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_int_peak = 356

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Nov-2024

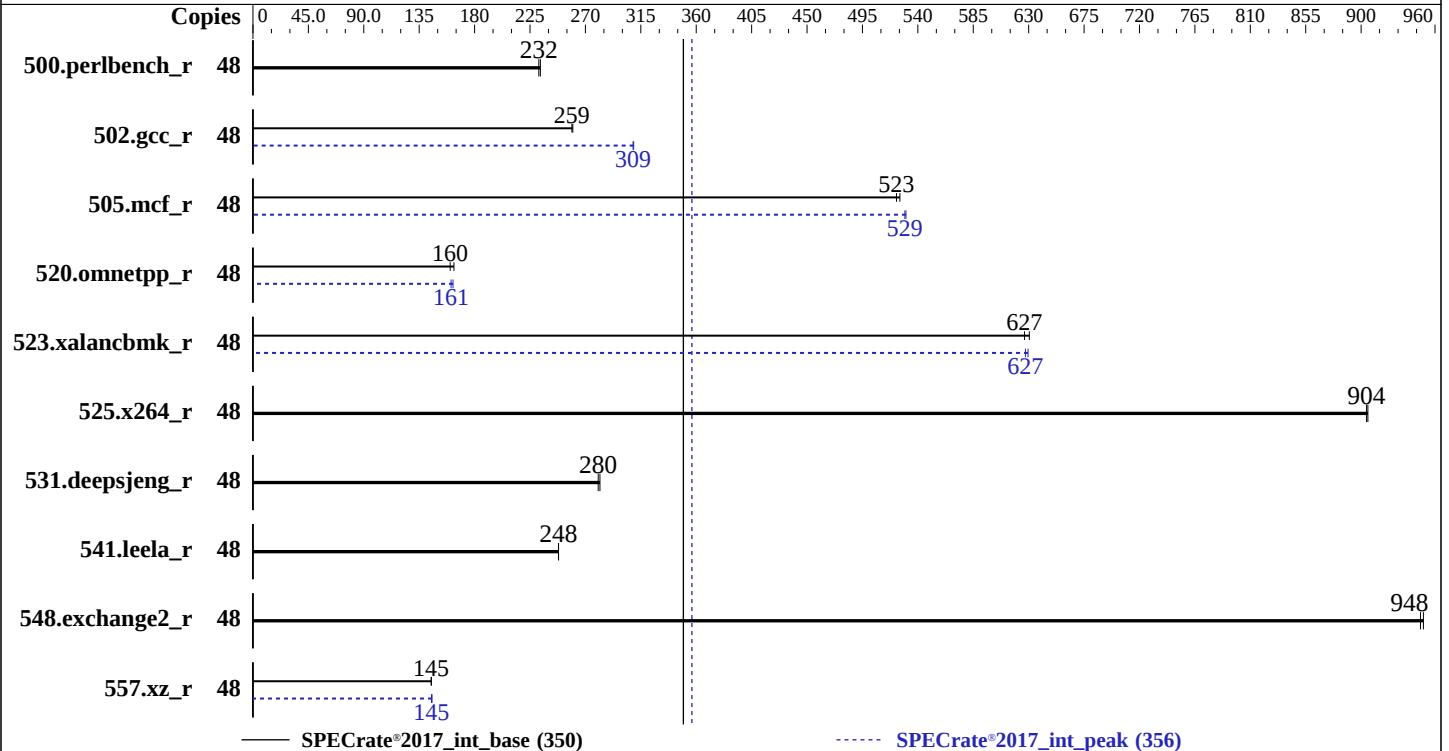

Hardware

CPU Name: AMD EPYC 9255
Max MHz: 4300
Nominal: 3200
Enabled: 24 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 128 MB I+D on chip per chip, 32 MB shared / 6 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R, running at 5200)
Storage: 50 GB on tmpfs
Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.1 LTS
6.8.0-49-generic
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: Version 1.1.2 released Feb-2025
File System: tmpfs
System State: Run level 5 (graphical multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 350

PowerEdge R7715 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_int_peak = 356

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Nov-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	329	232	327	233			48	329	232	327	233		
502.gcc_r	48	262	259	262	260			48	220	309	220	309		
505.mcf_r	48	148	523	148	525			48	147	529	146	530		
520.omnetpp_r	48	386	163	393	160			48	391	161	388	162		
523.xalancbmk_r	48	80.9	627	80.4	631			48	80.5	629	80.8	627		
525.x264_r	48	92.8	905	92.9	904			48	92.8	905	92.9	904		
531.deepsjeng_r	48	195	282	196	280			48	195	282	196	280		
541.leela_r	48	320	248	320	248			48	320	248	320	248		
548.exchange2_r	48	132	951	133	948			48	132	951	133	948		
557.xz_r	48	358	145	358	145			48	358	145	356	145		

SPECrate®2017_int_base = 350

SPECrate®2017_int_peak = 356

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 350

PowerEdge R7715 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_int_peak = 356

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Nov-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3/amd_rate_aocc500_znver5_A_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

MALLOC_CONF = "thp:always"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

Benchmark run from a 50 GB ramdisk created with the cmd: "mount -t tmpfs -o size=50G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

Virtualization Technology : Disabled

NUMA Nodes Per Socket : 4

System Profile : Custom

C-States : Disabled

Memory Patrol Scrub : Disabled

PCI ASPM L1 Link Power Management : Disabled

Periodic Directory Rinse Tuning : Blended

Determinism Control : Manual

Determinism Slider : Power Determinism

Optimizer Mode : Enabled

Adaptive Allocation : Enabled

Dram Refresh Delay : Performance

DIMM Self Healing -

on Uncorrectable Memory Error : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on SLR7751-R7715 Fri Apr 11 10:44:47 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 350

PowerEdge R7715 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_int_peak = 356

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Nov-2024

Platform Notes (Continued)

```
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

```
1. uname -a
Linux SLR7751-R7715 6.8.0-49-generic #49-Ubuntu SMP PREEMPT_DYNAMIC Mon Nov 4 02:06:24 UTC 2024 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
10:44:47 up 2 min, 1 user, load average: 0.19, 0.08, 0.02
USER  TTY  FROM      LOGIN@   IDLE   JCPU   PCPU   WHAT
root  tty1  -          10:42    54.00s 1.13s  0.32s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            3092981
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

```
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh rate --define DL-VERS=6.2 --output_format html, pdf, txt
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=4 --define DL-VERS=6.2 --output_format html, pdf, txt intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=4 --define DL-VERS=6.2 --output_format html, pdf, txt --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 350

PowerEdge R7715 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_int_peak = 356

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Nov-2024

Platform Notes (Continued)

\$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3

6. /proc/cpuinfo

```
model name      : AMD EPYC 9255 24-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 26
model           : 2
stepping        : 1
microcode       : 0xb00211e
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 24
siblings        : 48
1 physical ids (chips)
48 processors (hardware threads)
physical id 0:  core ids 0-5,8-13,16-21,24-29
physical id 0:  apicids 0-11,16-27,32-43,48-59
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 48
On-line CPU(s) list:    0-47
Vendor ID:              AuthenticAMD
BIOS Vendor ID:        AMD
Model name:             AMD EPYC 9255 24-Core Processor
BIOS Model name:        AMD EPYC 9255 24-Core Processor
BIOS CPU family:        107
CPU family:             26
Model:                  2
Thread(s) per core:     2
Core(s) per socket:     24
Socket(s):              1
Stepping:               1
Frequency boost:        enabled
CPU(s) scaling MHz:     76%
CPU max MHz:            4315.6250
CPU min MHz:            1500.0000
BogoMIPS:               6390.68
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                        rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                        extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                        sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                        cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                        osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                        perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                        ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                        smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
```

CPU @ 3.2GHz

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 350

PowerEdge R7715 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_int_peak = 356

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Nov-2024

Platform Notes (Continued)

xsaverptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca avx512_vp2intersect
flush_l1d debug_swap
L1d cache: 1.1 MiB (24 instances)
L1i cache: 768 KiB (24 instances)
L2 cache: 24 MiB (24 instances)
L3 cache: 128 MiB (4 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-5,24-29
NUMA node1 CPU(s): 6-11,30-35
NUMA node2 CPU(s): 12-17,36-41
NUMA node3 CPU(s): 18-23,42-47
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	1M	24M	16	Unified	2	1024	1	64
L3	32M	128M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0-5,24-29
node 0 size: 192814 MB
node 0 free: 188631 MB
node 1 cpus: 6-11,30-35
node 1 size: 193530 MB
node 1 free: 193092 MB
node 2 cpus: 12-17,36-41
node 2 size: 193530 MB
node 2 free: 193078 MB
node 3 cpus: 18-23,42-47
node 3 size: 193440 MB
node 3 free: 193037 MB
node distances:
node 0 1 2 3
0: 10 12 12 12
1: 12 10 12 12
2: 12 12 10 12

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 350

PowerEdge R7715 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_int_peak = 356

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Nov-2024

Platform Notes (Continued)

3: 12 12 12 10

9. /proc/meminfo

MemTotal: 791875980 kB

10. who -r

run-level 5 Apr 11 10:42

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.4)

Default Target Status
graphical running

12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
enabled-runtime console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
disabled systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysexit systemd-time-wait-sync upower
indirect systemd-sysupdate systemd-sysupdate-reboot uuid
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.8.0-49-generic
root=UUID=8458ae54-58cc-4621-9289-b1d743fde503
ro

14. cpupower frequency-info

analyzing CPU 10:

current policy: frequency should be within 1.50 GHz and 3.20 GHz.
The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 3200MHz

15. tuned-adm active

Current active profile: throughput-performance

16. sysctl

kernel.numa_balancing 1

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 350

PowerEdge R7715 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_int_peak = 356

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Nov-2024

Platform Notes (Continued)

```
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled  always within_size advise [never] deny force
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs    10000
```

```
-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.1 LTS
```

```
-----
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs           tmpfs  50G   3.3G   47G   7% /mnt/ramdisk
```

```
-----
21. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge R7715
Product Family: PowerEdge
Serial:      SLR7751
```

```
-----
22. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 350

PowerEdge R7715 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_int_peak = 356

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Nov-2024

Platform Notes (Continued)

Memory:
12x 802C0000802C MTC40F2046S1RC64BD1 64 GB 2 rank 6400, configured at 5200

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 1.1.2
BIOS Date: 02/20/2025
BIOS Revision: 1.1

Compiler Version Notes

=====

C		502.gcc_r(peak)
---	--	-----------------

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C		500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
		557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C		502.gcc_r(peak)
---	--	-----------------

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C		500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
		557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C++		520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
		541.leela_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 350

PowerEdge R7715 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_int_peak = 356

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Nov-2024

Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran | 548.exchange2_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather

-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5

-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -fltO

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 350

PowerEdge R7715 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_int_peak = 356

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Nov-2024

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang  
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie  
-fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext  
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto  
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost  
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500  
-lamdlibm -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

clang

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 350

PowerEdge R7715 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_int_peak = 356

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Nov-2024

Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: basepeak = yes
```

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 350

PowerEdge R7715 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_int_peak = 356

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Nov-2024

Peak Optimization Flags (Continued)

505.mcf_r (continued):

-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

525.x264_r: basepeak = yes

557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

C++ benchmarks:

520.omnetpp_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lamdalloc-ext
-ldl

523.xalancbmk_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 350

PowerEdge R7715 (AMD EPYC 9255 24-Core Processor)

SPECrate®2017_int_peak = 356

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2025

Hardware Availability: Mar-2025

Software Availability: Nov-2024

Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-04-11 06:44:46-0400.

Report generated on 2025-06-17 18:15:23 by CPU2017 PDF formatter v6716.

Originally published on 2025-06-17.