



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECrate®2017_fp_base = 1440

PRIMERGY RX2540 M8, Intel Xeon 6760P, 2.20GHz

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Sep-2025

Hardware Availability: Oct-2025

Software Availability: Jun-2025

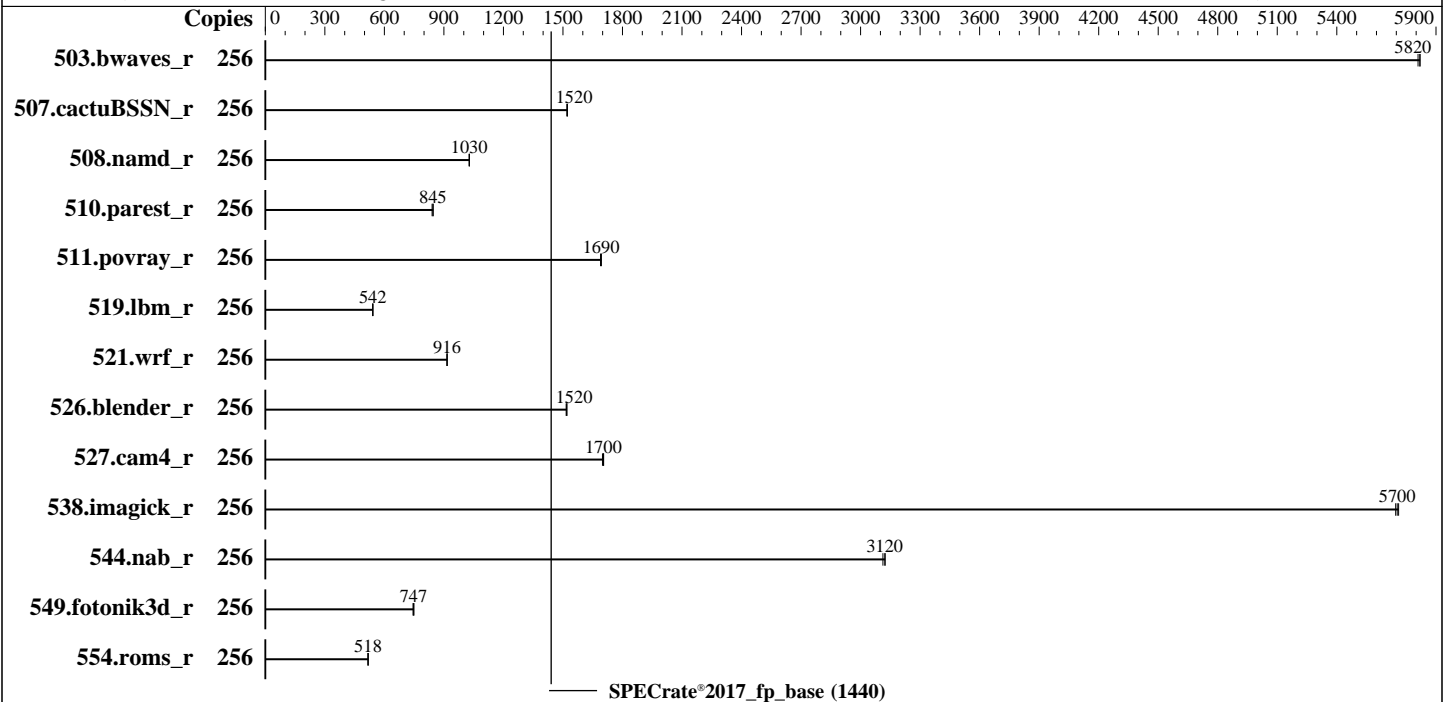

Hardware

CPU Name: Intel Xeon 6760P
 Max MHz: 3800
 Nominal: 2200
 Enabled: 128 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 320 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
 Storage: 1 x SSD PCIe M.2, 960GB
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP7
 6.4.0-150700.51-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran
 Compiler for Linux;
 Parallel: No
 Firmware: Fsas Technologies Inc. BIOS Version V1.0.0.0
 R1.1.0 for D4135-A1x. Released Oct-2025
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost
 of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECrate®2017_fp_base = 1440

SPECrate®2017_fp_peak = Not Run

PRIMERGY RX2540 M8, Intel Xeon 6760P, 2.20GHZ

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Sep-2025

Hardware Availability: Oct-2025

Software Availability: Jun-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	441	5820	441	5820	442	5810							
507.cactuBSSN_r	256	213	1520	213	1520	213	1520							
508.namd_r	256	237	1030	237	1030	237	1030							
510.parest_r	256	793	845	797	840	792	846							
511.povray_r	256	353	1690	354	1690	353	1690							
519.lbm_r	256	498	542	498	542	498	542							
521.wrf_r	256	626	916	626	916	626	916							
526.blender_r	256	257	1520	257	1520	256	1520							
527.cam4_r	256	263	1710	263	1700	264	1700							
538.imagick_r	256	112	5700	111	5710	112	5700							
544.nab_r	256	138	3120	138	3110	138	3120							
549.fotonik3d_r	256	1332	749	1335	747	1340	744							
554.roms_r	256	786	518	785	518	786	518							

SPECrate®2017_fp_base = 1440

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/cpu2017/lib/intel64:/home/Benchmark/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECrate®2017_fp_base = 1440

PRIMERGY RX2540 M8, Intel Xeon 6760P, 2.20GHZ

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Sep-2025

Hardware Availability: Oct-2025

Software Availability: Jun-2025

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Fan Control = Full

SNC (Sub NUMA) = Enabled

CPU Performance Boost = Aggressive

Sysinfo program /home/Benchmark/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Fri Sep 19 13:05:00 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 6.4.0-150700.51-default #1 SMP PREEMPT_DYNAMIC Wed Apr 30 21:35:43 UTC 2025 (6930611)
x86_64 x86_64 x86_64 GNU/Linux

2. w
13:05:00 up 5:13, 1 user, load average: 55.96, 188.01, 230.14

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	-	07:53	5:11m	1.25s	0.15s	-bash

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECrate®2017_fp_base = 1440

PRIMERGY RX2540 M8, Intel Xeon 6760P, 2.20GHz

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Sep-2025

Hardware Availability: Oct-2025

Software Availability: Jun-2025

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 2061977
max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 2061977
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=128 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=128 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/cpu2017

```

6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6760P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping      : 1
microcode     : 0x10003c2
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores     : 64
siblings      : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-31,64-95
physical id 1: core ids 0-31,64-95
physical id 0: apicids 0-63,128-191
physical id 1: apicids 256-319,384-447
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECrate®2017_fp_base = 1440

PRIMERGY RX2540 M8, Intel Xeon 6760P, 2.20GHZ

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Sep-2025

Hardware Availability: Oct-2025

Software Availability: Jun-2025

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.40.4:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        52 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):               256
On-line CPU(s) list: 0-255
Vendor ID:            GenuineIntel
Model name:           Intel(R) Xeon(R) 6760P
CPU family:           6
Model:                173
Thread(s) per core:  2
Core(s) per socket:  64
Socket(s):            2
Stepping:             1
CPU(s) scaling MHz:  22%
CPU max MHz:         3800.0000
CPU min MHz:         800.0000
BogoMIPS:            4400.00
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                    pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                    pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                    nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                    pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                    xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                    tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                    3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                    ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                    vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid cqm
                    rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                    intel_pt avx512cd sha_ni avx512bw avx512v1 xsaveopt xsavec xgetbv1
                    xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                    split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                    arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req hfi vnmi
                    avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                    avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                    bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                    serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                    amx_int8 flush_lld arch_capabilities
Virtualization:       VT-x
L1d cache:           6 MiB (128 instances)
L1i cache:           8 MiB (128 instances)
L2 cache:            256 MiB (128 instances)
L3 cache:           640 MiB (2 instances)
NUMA node(s):        4
NUMA node0 CPU(s):  0-31,128-159
NUMA node1 CPU(s):  32-63,160-191
NUMA node2 CPU(s):  64-95,192-223
NUMA node3 CPU(s):  96-127,224-255
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:    Not affected
Vulnerability Reg file data sampling: Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECrate®2017_fp_base = 1440

SPECrate®2017_fp_peak = Not Run

PRIMERGY RX2540 M8, Intel Xeon 6760P, 2.20GHZ

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Sep-2025

Hardware Availability: Oct-2025

Software Availability: Jun-2025

Platform Notes (Continued)

Vulnerability Retbleed: Not affected
 Vulnerability Spec rstack overflow: Not affected
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI_DIS_S
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	64K	8M	16	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	320M	640M	16	Unified	3	327680	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-31,128-159
node 0 size: 128576 MB
node 0 free: 127769 MB
node 1 cpus: 32-63,160-191
node 1 size: 129006 MB
node 1 free: 128322 MB
node 2 cpus: 64-95,192-223
node 2 size: 129006 MB
node 2 free: 128333 MB
node 3 cpus: 96-127,224-255
node 3 size: 128930 MB
node 3 free: 128219 MB
node distances:
node  0  1  2  3
 0:  10  12  21  21
 1:  12  10  21  21
 2:  21  21  10  12
 3:  21  21  12  10
```

9. /proc/meminfo

MemTotal: 527893704 kB

10. who -r

run-level 3 Sep 19 07:52

11. Systemd service manager version: systemd 254 (254.24+suse.148.g83b9060b6e)

Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections nvme-f-autoconnect postfix purge-kernels rollback rsyslog sep5 smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECrate®2017_fp_base = 1440

SPECrate®2017_fp_peak = Not Run

PRIMERGY RX2540 M8, Intel Xeon 6760P, 2.20GHZ

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Sep-2025

Hardware Availability: Oct-2025

Software Availability: Jun-2025

Platform Notes (Continued)

```

disabled      autofsd autofast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
              chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
              firewallld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
              man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
              smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
              systemd-network-generator systemd-sysexec systemd-time-wait-sync systemd-timesyncd
              vncserver@
indirect      systemd-userdbd wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150700.51-default
root=UUID=90732971-989d-4632-82bc-39689e893398
splash=silent
mitigations=auto
quiet
security=apparmor

```

14. cpupower frequency-info

```

analyzing CPU 177:
  current policy: frequency should be within 800 MHz and 3.80 GHz.
                  The governor "powersave" may decide which speed to use
                  within this range.

boost state support:
  Supported: yes
  Active: yes

```

15. sysctl

```

kernel.numa_balancing      1
kernel.randomize_va_space  2
vm.compaction_proactiveness 20
vm.dirty_background_bytes  0
vm.dirty_background_ratio  10
vm.dirty_bytes              0
vm.dirty_expire_centisecs  3000
vm.dirty_ratio              20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold       500
vm.min_unmapped_ratio      1
vm.nr_hugepages             0
vm.nr_hugepages_mempolicy   0
vm.nr_overcommit_hugepages 0
vm.swappiness                60
vm.watermark_boost_factor   15000
vm.watermark_scale_factor   10
vm.zone_reclaim_mode        0

```

16. /sys/kernel/mm/transparent_hugepage

```

defrag      always defer defer+madvise [madvise] never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```

alloc_sleep_millisecs 60000

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECrate®2017_fp_base = 1440

SPECrate®2017_fp_peak = Not Run

PRIMERGY RX2540 M8, Intel Xeon 6760P, 2.20GHz

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Sep-2025

Hardware Availability: Oct-2025

Software Availability: Jun-2025

Platform Notes (Continued)

```

defrag                1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs  10000

```

```

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP7

```

```

-----
19. Disk information
SPEC is set to: /home/Benchmark/cpu2017
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3  xfs  911G  43G  869G   5% /home

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Fsas Technologies
Product:     PRIMERGY RX2540 M8
Product Family: SERVER
Serial:      xxxxxxxxxxxx

```

```

-----
21. dmidecode
Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
    16x Samsung M321R4GA3EB2-CCPKF 32 GB 2 rank 6400

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Fsas Technologies
BIOS Version:     V1.0.0.0 R1.1.0 for D4135-Alx
BIOS Date:        09/05/2025
BIOS Revision:    1.1
Firmware Revision: 3.1

```

Compiler Version Notes

```

=====
C          | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

```

```

-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```

```

=====
C++       | 508.namd_r(base) 510.parest_r(base)

```

```

-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECrate®2017_fp_base = 1440

PRIMERGY RX2540 M8, Intel Xeon 6760P, 2.20GHZ

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Sep-2025

Hardware Availability: Oct-2025

Software Availability: Jun-2025

Compiler Version Notes (Continued)

=====
C++, C | 511.povray_r(base) 526.blender_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECrate®2017_fp_base = 1440

PRIMERGY RX2540 M8, Intel Xeon 6760P, 2.20GHz

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Sep-2025

Hardware Availability: Oct-2025

Software Availability: Jun-2025

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

```

Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

```

Benchmarks using both Fortran and C:

```

-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fsas Technologies Inc.

(Test Sponsor: Fujitsu)

SPECrate®2017_fp_base = 1440

PRIMERGY RX2540 M8, Intel Xeon 6760P, 2.20GHz

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fsas Technologies Inc.

Test Date: Sep-2025

Hardware Availability: Oct-2025

Software Availability: Jun-2025

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fsas-Platform-Settings-V1.0-GNR-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fsas-Platform-Settings-V1.0-GNR-RevA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-09-19 00:05:00-0400.

Report generated on 2025-10-15 12:52:12 by CPU2017 PDF formatter v6716.

Originally published on 2025-10-14.