



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

WIO A+ Server AS -1015SV-WTNRT
(H13SVW-NT, AMD EPYC 8635P)

SPECrate®2017_fp_base = 578

SPECrate®2017_fp_peak = 593

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2026

Hardware Availability: May-2026

Software Availability: Mar-2026

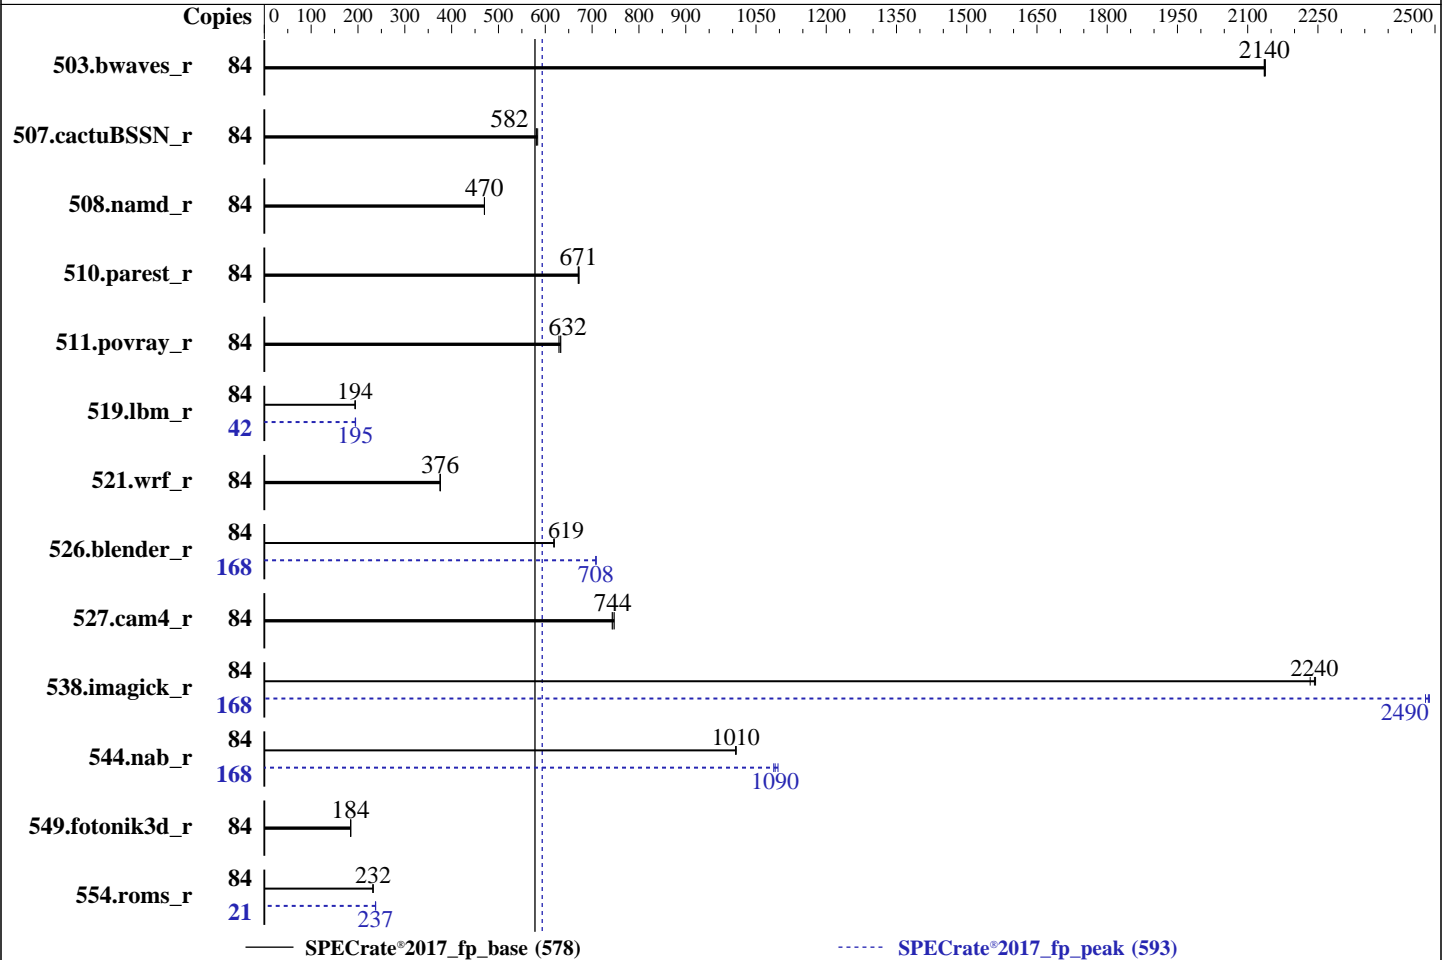

Hardware

CPU Name: AMD EPYC 8635P
 Max MHz: 4500
 Nominal: 1600
 Enabled: 84 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 384 MB I+D on chip per chip, 32 MB shared / 7 cores
 Other: None
 Memory: 384 GB (6 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1 x 480 GB NVMe SSD
 Other: CPU Cooling: Air

Software

OS: Ubuntu 24.04.3 LTS
 6.8.0-106-generic
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
 Parallel: No
 Firmware: Version 2.0 released Mar-2026
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

WIO A+ Server AS -1015SV-WTNRT
(H13SVW-NT, AMD EPYC 8635P)

SPECrate®2017_fp_base = 578

SPECrate®2017_fp_peak = 593

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Mar-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	84	394	2140	394	2140	394	2140	84	394	2140	394	2140	394	2140
507.cactuBSSN_r	84	182	584	183	582	183	581	84	182	584	183	582	183	581
508.namd_r	84	170	470	170	470	170	470	84	170	470	170	470	170	470
510.parest_r	84	328	670	327	671	327	672	84	328	670	327	671	327	672
511.povray_r	84	310	632	312	629	310	633	84	310	632	312	629	310	633
519.lbm_r	84	456	194	456	194	456	194	42	228	194	227	195	227	195
521.wrf_r	84	501	375	501	376	501	376	84	501	375	501	376	501	376
526.blender_r	84	207	618	207	619	207	619	168	361	708	361	708	361	708
527.cam4_r	84	197	747	197	744	198	743	84	197	747	197	744	198	743
538.imagick_r	84	93.2	2240	93.5	2230	93.1	2240	168	168	2480	168	2490	168	2490
544.nab_r	84	140	1010	140	1010	140	1010	168	259	1090	260	1090	258	1100
549.fotonik3d_r	84	1776	184	1775	184	1776	184	84	1776	184	1775	184	1776	184
554.roms_r	84	576	232	575	232	574	232	21	141	237	141	237	140	238

SPECrate®2017_fp_base = **578**

SPECrate®2017_fp_peak = **593**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

WIO A+ Server AS -1015SV-WTNRT
(H13SVW-NT , AMD EPYC 8635P)

SPECrate®2017_fp_base = 578

SPECrate®2017_fp_peak = 593

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Mar-2026

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/spec/cpu2017aoccal.5/amd_rate_aocc500_znver5_A_lib/lib:/spec/cpu2017aoccal.5/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:
NUMA Nodes Per Socket = NPS2
Determinism Control = Manual
Determinism Enable = Power
TDP control = Manual
TDP = 225
Package Power Limit Control = Manual
Package Power Limit = 225
TSME = Disabled
SMEE = Disabled

```
Sysinfo program /spec/cpu2017aoccal.5/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on smc9027sorano-u24-os Sun Mar 29 23:34:01 2026
```

SUT (System Under Test) info as seen by some common utilities.

----- Table of contents -----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

WIO A+ Server AS -1015SV-WTNRT
(H13SVW-NT, AMD EPYC 8635P)

SPECrate®2017_fp_base = 578

SPECrate®2017_fp_peak = 593

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Mar-2026

Platform Notes (Continued)

- 10. who -r
- 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.14)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent_hugepage
- 17. /sys/kernel/mm/transparent_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

```
-----
1. uname -a
Linux smc9027sorano-u24-os 6.8.0-106-generic #106-Ubuntu SMP PREEMPT_DYNAMIC Fri Mar 6 07:58:08 UTC 2026
x86_64 x86_64 x86_64 GNU/Linux
-----
```

```
-----
2. w
 23:34:01 up 6:38, 2 users, load average: 115.93, 155.26, 156.34
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1    10.23.202.142   16:56    6:38m  0.00s  0.32s  sshd: root@pts/0
root      tty1    -               16:55    6:38m  0.05s  ?      -bash
-----
```

```
-----
3. Username
From environment variable $USER: root
-----
```

```
-----
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            1545337
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
-----
```

```
-----
5. sysinfo process ancestry
/sbin/init
SCREEN -S cpu
/bin/bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.003/templogs/preenv.fprate.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /spec/cpu2017aocca1.5
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

WIO A+ Server AS -1015SV-WTNRT
(H13SVW-NT, AMD EPYC 8635P)

SPECrate®2017_fp_base = 578

SPECrate®2017_fp_peak = 593

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Mar-2026

Platform Notes (Continued)

```

6. /proc/cpuinfo
model name      : AMD EPYC 8635P 84-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 2
stepping       : 1
microcode      : 0xb002162
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores      : 84
siblings       : 168
1 physical ids (chips)
168 processors (hardware threads)
physical id 0: core ids 0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62,64-70,72-78,80-86,88-94
physical id 0: apicids 0-13,16-29,32-45,48-61,64-77,80-93,96-109,112-125,128-141,144-157,160-173,176-189
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                168
On-line CPU(s) list:  0-167
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 8635P 84-Core Processor
BIOS Model name:      AMD EPYC 8635P 84-Core Processor
                       1.6GHz
BIOS CPU family:      107
CPU family:            26
Model:                 2
Thread(s) per core:   2
Core(s) per socket:   84
Socket(s):             1
Stepping:              1
Frequency boost:      enabled
CPU(s) scaling MHz:   39%
CPU max MHz:           4532.8120
CPU min MHz:           1500.0000
BogoMIPS:              3195.35
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                       pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
                       pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl
                       nonstop_tsc cpuid extd_apicid aperfmperf rapl pni pclmulqdq
                       monitor sse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes
                       xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                       abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                       topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
                       cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
                       ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                       invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                       clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                       xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                       user_shstk avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

WIO A+ Server AS -1015SV-WTNRT
(H13SVW-NT , AMD EPYC 8635P)

SPECrate®2017_fp_base = 578

SPECrate®2017_fp_peak = 593

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Mar-2026

Platform Notes (Continued)

```

Virtualization:
L1d cache: 3.9 MiB (84 instances)
L1i cache: 2.6 MiB (84 instances)
L2 cache: 84 MiB (84 instances)
L3 cache: 384 MiB (12 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-41,84-125
NUMA node1 CPU(s): 42-83,126-167
Vulnerability Gather data sampling: Not affected
Vulnerability Indirect target selection: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer
sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; PBRSE-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsa: Not affected
Vulnerability Tsx async abort: Not affected
Vulnerability Vmscape: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.9M	12	Data	1	64	1	64
L1i	32K	2.6M	8	Instruction	1	64	1	64
L2	1M	84M	16	Unified	2	1024	1	64
L3	32M	384M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-41,84-125
node 0 size: 192969 MB
node 0 free: 190108 MB
node 1 cpus: 42-83,126-167
node 1 size: 193446 MB
node 1 free: 191191 MB
node distances:
node  0  1
 0:  10  12
 1:  12  10

```

9. /proc/meminfo

MemTotal: 395689812 kB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

WIO A+ Server AS -1015SV-WTNRT
(H13SVW-NT , AMD EPYC 8635P)

SPECrate®2017_fp_base = 578

SPECrate®2017_fp_peak = 593

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Mar-2026

Platform Notes (Continued)

10. who -r
run-level 5 Mar 29 16:55

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.14)
Default Target Status
graphical running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager apparmor appport blk-availability cloud-config cloud-final cloud-init
cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
unattended-upgrades vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
systemd-boot-check-no-failures systemd-confext systemd-network-generator
systemd-networkd-wait-online@ systemd-PCRlock-file-system systemd-PCRlock-firmware-code
systemd-PCRlock-firmware-config systemd-PCRlock-machine-id systemd-PCRlock-make-policy
systemd-PCRlock-secureboot-authority systemd-PCRlock-secureboot-policy systemd-sysext
systemd-time-wait-sync upower
indirect systemd-sysupdate systemd-sysupdate-reboot uuid
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.8.0-106-generic
root=UUID=1bee86d1-7232-471a-ab77-0c9fc9498fal
ro

14. cpupower frequency-info
analyzing CPU 117:
current policy: frequency should be within 1.50 GHz and 1.60 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 1600MHz

15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

WIO A+ Server AS -1015SV-WTNRT
(H13SVW-NT, AMD EPYC 8635P)

SPECrate®2017_fp_base = 578

SPECrate®2017_fp_peak = 593

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Mar-2026

Platform Notes (Continued)

```

vm.dirtytime_expire_seconds      43200
vm.extfrag_threshold             500
vm.min_unmapped_ratio           1
vm.nr_hugepages                  0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                     1
vm.watermark_boost_factor        15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode             1

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.3 LTS

```

```

-----
19. Disk information
SPEC is set to: /spec/cpu2017aoccal.5
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p2 ext4  457G   16G  418G   4% /

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          Supermicro
Product:         Super Server
Product Family:  SMC H13
Serial:          0123456789

```

```

-----
21. dmidecode
Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  5x Micron Technology MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400
  1x Micron Technology MTC40F2046S1RC64BD2 MXCC 64 GB 2 rank 6400

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

WIO A+ Server AS -1015SV-WTNRT
(H13SVW-NT, AMD EPYC 8635P)

SPECrate®2017_fp_base = 578

SPECrate®2017_fp_peak = 593

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Mar-2026

Platform Notes (Continued)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 2.0
BIOS Date: 03/23/2026
BIOS Revision: 5.42

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

WIO A+ Server AS -1015SV-WTNRT
(H13SVW-NT , AMD EPYC 8635P)

SPECrate®2017_fp_base = 578

SPECrate®2017_fp_peak = 593

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Mar-2026

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

WIO A+ Server AS -1015SV-WTNRT
(H13SVW-NT, AMD EPYC 8635P)

SPECrate®2017_fp_base = 578

SPECrate®2017_fp_peak = 593

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Mar-2026

Base Portability Flags (Continued)

521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

C++ benchmarks:

-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

WIO A+ Server AS -1015SV-WTNRT
(H13SVW-NT, AMD EPYC 8635P)

SPECrate®2017_fp_base = 578

SPECrate®2017_fp_peak = 593

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Mar-2026

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamplibm -lamdalloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamplibm -lamdalloc -lflang
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamplibm -lamdalloc -lflang -ldl
```

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

WIO A+ Server AS -1015SV-WTNRT
(H13SVW-NT , AMD EPYC 8635P)

SPECrate®2017_fp_base = 578

SPECrate®2017_fp_peak = 593

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Mar-2026

Base Other Flags (Continued)

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -m64 -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6
-Wl, -mllvm -Wl, -reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flt0
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

WIO A+ Server AS -1015SV-WTNRT
(H13SVW-NT , AMD EPYC 8635P)

SPECrate®2017_fp_base = 578

SPECrate®2017_fp_peak = 593

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Mar-2026
Hardware Availability: May-2026
Software Availability: Mar-2026

Peak Optimization Flags (Continued)

519.lbm_r (continued):

```
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

538.imagick_r: Same as 519.lbm_r

```
544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl
```

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -ldl -lflang
```

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

WIO A+ Server AS -1015SV-WTNRT
(H13SVW-NT, AMD EPYC 8635P)

SPECrate®2017_fp_base = 578

SPECrate®2017_fp_peak = 593

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2026

Hardware Availability: May-2026

Software Availability: Mar-2026

Peak Optimization Flags (Continued)

```
526.blender_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fltvo
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl
```

Benchmarks using Fortran, C, and C++:

```
507.cactuBSSN_r: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Sorano-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Sorano-revB.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2026 Standard Performance Evaluation Corporation

Supermicro

WIO A+ Server AS -1015SV-WTNRT
(H13SVW-NT , AMD EPYC 8635P)

SPECrate®2017_fp_base = 578

SPECrate®2017_fp_peak = 593

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Mar-2026

Hardware Availability: May-2026

Software Availability: Mar-2026

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2026-03-29 19:34:01-0400.

Report generated on 2026-05-19 17:27:43 by CPU2017 PDF formatter v6716.

Originally published on 2026-05-19.